

U. S. Department of Interior  
Geological Survey  
Office of Earthquake Studies  
345 Middlefield Road  
Menlo Park, Ca. 94025

Summary of results of frictional sliding  
studies, at confining pressures up to 6.98  
kb, in selected rock materials.

R. Summers

J. Byerlee

Open-file Report 77-142

1977

This report is preliminary and has not been edited  
or reviewed for conformity with Geological Survey  
standards and nomenclature

Contents

Page

Introduction-----	5
Summary of Experimental Conditions-----	8
Berea Sandstone-----	13
Chlorite-----	19
Clays: Halloysite, Kaolinite, Illite, Montmorillonite	
Vermiculite-----	22
Graphite-----	37
Muscovite-----	40
Ottawa Quartz Sand-----	45
Serpentinite-----	78
Solenhofen Limestone-----	88
Talc-----	91
Westerly Granite      Intact-----	98
Clean sawcut surfaces-----	111
Crushed grains-----	117

1.	Sample arrangement used for this high pressure frictional sliding study-----	7
2,3	Berea sandstone wafers, 0.040 inch-----	15 - 16
4,5	Berea sandstone wafers, 0.080 inch-----	17 - 18
6,7	Chlorite wafers-----	20 - 21
8,9	Halloysite - dried-----	25 - 26
10	Kaolinite - dried-----	27
11,12	Illite - dried-----	28 - 29
13	Illite - water saturated-----	30
14,15	Montmorillonite - dried-----	31 - 32
16	Montmorillonite - water saturated-----	33
17,18	Vermiculite-----	34 - 35
19	Air dried clays compared - Halloysite, Illite, Kaolinite Montmorillonite, Vermiculite-----	36
20,21	Graphite wafers-----	38 - 39
22-24	Muscovite - cleavage sheets-----	41 - 43
25	Muscovite - crushed-----	44
26-57	Ottawa Quartz Sand-----	46 - 77
58,59	Serpentinite (New Almaden) - crushed-----	80 - 81
60-63	Serpentinite (Del Puerto) - wafers-----	82 - 85
64,65	Serpentinite (Del Puerto) - crushed-----	86 - 87
66,67	Solenhofen Limestone - wafers-----	89 - 90
68	Talc - Intact cylinders-----	93
69,70	Talc - Wafers, 0.020 to 0.080 inch-----	94 - 95

Figures

Page

71,72	Talc - wafers 0.025 inch-----	96 - 97
73-84	Westerly Granite - intact cylinders-----	99 -110
85-89	Westerly Granite - clean sawcut surfaces-----	112 -116
90-101	Westerly Granite - crushed grains-----	118 -129

SUMMARY OF RESULTS OF FRICTIONAL SLIDING STUDIES,  
AT CONFINING PRESSURES UP TO 6.98 kb,  
IN SELECTED ROCK MATERIALS

By R. Summers and J. Byerlee

Introduction


This report is a collection of stress-strain charts which were produced by deforming selected simulated fault gouge materials.

Several sets of samples consisted of intact cylinders, 1.000 inch diameter and 2.500 inches long. The majority of the samples consisted of thin layers of the selected sample material, inserted within a diagonal sawcut in a 1.000 inch by 2.500 inch Westerly Granite cylinder (fig. 1). Two sorts of inserts were used. The first consisted of thin wafers cut from 1.000 inch diameter cores of the rock being tested. The other consisted of thin layers of crushed material packed onto the sawcut surface.

In several groups of tests using various thicknesses (0.010-inch to 0.160 inch) of a given type material there were variations in the stress level and/or stability of sliding as a function of the fault zone width. Because of this we elected to use a standard 0.025 inch width fault zone to compare the frictional properties of many of the different types of rock materials. This 0.025 inch thickness was chosen partially because this thickness of crushed granite behaves approximately the same as a fractured sample of initially intact granite, and also because this is near the lower limit at which we could cut intact wafers for those samples that were prepared from thin slices of rock.

One series of tests was done with saw cut granite cylinders without fault gouge inserts.

All of these test were done in a hydraulically operated triaxial testing machine. The confining pressure ( $\sigma_1$ , least principal stress) was applied by pumping petroleum ether into a pressure vessel. The differential stress ( $\sigma_3 - \sigma_1$ ) was applied by a hydraulically operated ram that could be advanced into the pressure vessel at any of several strain rates ( $10^{-4} \text{sec}^{-1}$ ,  $10^{-5} \text{sec}^{-1}$ ,  $10^{-6} \text{sec}^{-1}$ ,  $10^{-7} \text{sec}^{-1}$ , or  $10^{-8} \text{sec}^{-1}$ ). All samples were jacketed in polyurethane tubing to exclude the confining pressure medium from the samples. The majority of the samples, with the exception of some of the initially intact rocks, also had thin copper jackets. These served to hold the saw cut parts of the granite sample holders in alignment while the samples were handled and pushed into the polyurethane jackets.

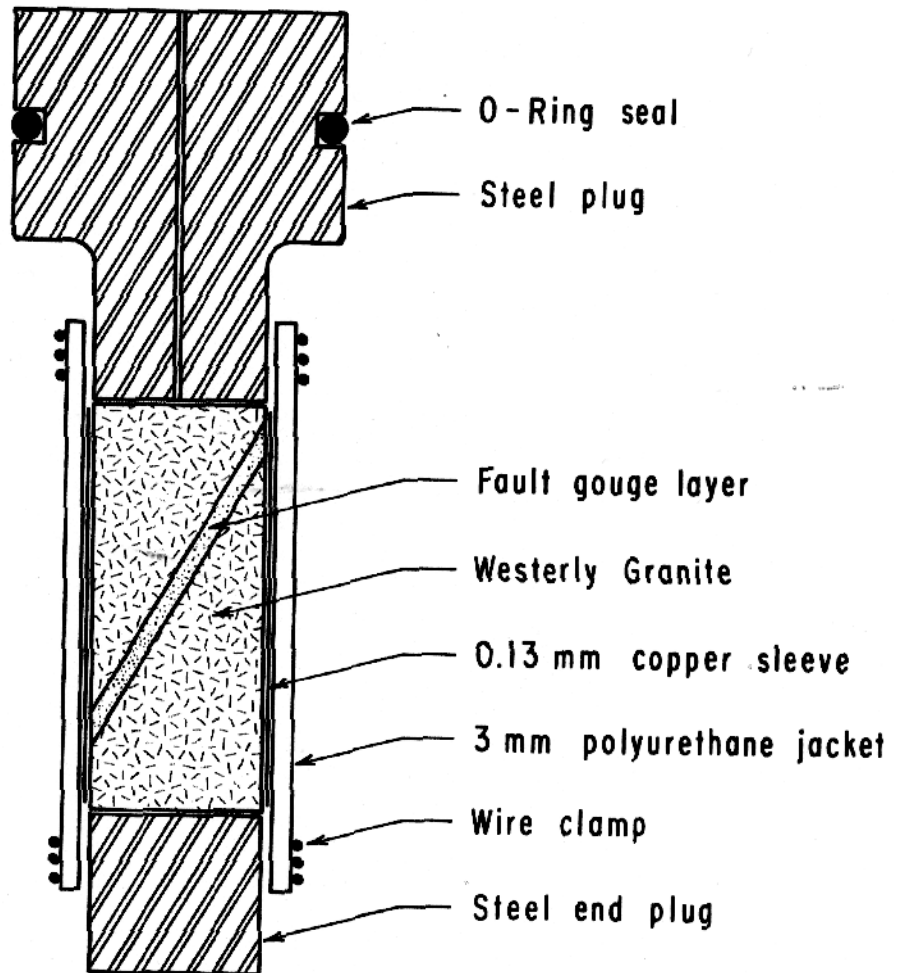

SUMMARY OF EXPERIMENTAL CONDITIONS

Figure Number	Type of Material	Thickness of: Crushed Gouge Layer OR Solid Wafer (Inches)	Material was: Placed in 30° or 45° saw cut in W. Granite OR used as Intact Cylinder	Confining Pressure	Strain Rate	Gouge was Deformed
2	Berea Sandstone	0.040 wafer	30°	0.78-6.27 kb	$10^{-4} \text{ sec}^{-1}$	Dry
3	Berea Sandstone	0.040 wafer	30°	0.78-2.35	$10^{-4}$	Dry
4	Berea Sandstone	0.080 wafer	30°	0.78-6.26	$10^{-4}$	Dry
5	Berea Sandstone	0.080 wafer	30°	0.78-2.37	$10^{-4}$	Dry
6	Chlorite	0.025 wafer	30°	0.74-6.26	$10^{-4}$	Dry
7	Chlorite	0.025 wafer	30°	0.73-6.27	$10^{-4}$	Dry
8	Halloysite	0.025 layer	30°	0.78-6.27	$10^{-4}$	Dry
9	Halloysite	0.025 layer	30°	0.78-6.27	$10^{-4}$	Dry
10	Kaolinite	0.025 layer	30°	0.77-6.27	$10^{-4}$	Dry
11	Illite	0.025 layer	30°	0.74-6.27	$10^{-4}$	Dry
12	Illite	0.025 layer	30°	0.74-6.24	$10^{-4}$	Dry
13	Illite	0.025 layer	30°	6.25-6.27	$10^{-5}$	Water Saturated
14	Montmorillonite	0.025 layer	30°	0.73-6.26	$10^{-4}$	Dry
15	Montmorillonite	0.025 layer	30°	0.74-6.24	$10^{-4}$	Dry
16	Montmorillonite	0.025 layer	30°	6.27-6.28	$10^{-5}$	Water Saturated
17	Vermiculite	0.025 layer	30°	0.78-6.27	$10^{-4}$	Dry

8



6

18	Vermiculite	0.025 layer	30°	0.78-6.27	$10^{-4}$	Dry
19	Five Clay Minerals	0.025 layer	30°	6.27	$10^{-4}$	Dry
20	Graphite	0.025 wafer	30°	0.74-6.26	$10^{-4}$	Dry
21	Graphite	0.025 wafer	30°	0.74-6.24	$10^{-4}$	Dry
22	Muscovite	0.025 wafer	30°	0.78-6.35	$10^{-4}$	Dry
23	Muscovite	0.025 wafer	30°	0.80-6.27	$10^{-4}$	Dry
24	Muscovite	0.025 wafer	30°	6.27	$10^{-4}$	Dry
25	Muscovite	0.025 layer	30°	6.27	$10^{-4}$	Dry
26	Ottawa Quartz Sand	0.080 layer	30°	4.70	$10^{-5}$	Dry
27	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Dry
28	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Dry
29	Ottawa Quartz Sand	0.160 layer	30°	4.70	--	Dry
30	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Dry
31	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Dry
32	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Dry
33	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-7}$	Dry
34	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5}$	Water Saturated
35	Ottawa Quartz Sand	0.160 layer	30°	4.70	--	Water Saturated
36	Ottawa Quartz Sand	0.160 layer	30°	4.70	$10^{-5} 10^{-7}$	Water Saturated
37	Ottawa Quartz Sand	0.080 layer	30°	4.70	$10^{-5}$	Dry

38	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
39	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
40	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
41	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
42	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
43	Ottawa Quartz Sand	0.080 layer	30°	4.70	10 <sup>-5</sup>	Dry
44	Ottawa Quartz Sand	0.160 layer	30°	4.70	10 <sup>-5</sup>	Dry
45	Ottawa Quartz Sand	0.160 layer	30°	4.70	10 <sup>-5</sup>	Dry
46	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
47	Ottawa Quartz Sand	0.160 layer	30°	4.70	10 <sup>-5</sup>	Dry
48	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
49	Ottawa Quartz Sand	0.160 layer	30°	4.70	10 <sup>-5</sup>	Dry
50	Ottawa Quartz Sand	0.160 layer	30°	4.70	10 <sup>-5</sup>	Dry
51	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
52	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
53	Ottawa Quartz Sand	0.160 layer	45°	2.60	10 <sup>-7</sup>	Dry
54	Ottawa Quartz Sand	0.160 layer	45°	2.60	10 <sup>-5</sup>	Dry
55	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
56	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
57	Ottawa Quartz Sand	0.160 layer	30°	2.00	10 <sup>-5</sup>	Dry
58	Serpentinite (Almaden)	0.025 layer	30°	0.73-6.25	10 <sup>-4</sup>	Dry

59	Serpentinite (Almaden)	0.025 layer	30°	0.73-6.26	10 <sup>-4</sup>	Dry
60	Serpentinite (DelPuerto)	0.020 wafer	30°	0.74-6.22	10 <sup>-4</sup>	Dry
61	Serpentinite (DelPuerto)	0.020 wafer	30°	0.74-6.23	10 <sup>-4</sup>	Dry
62	Serpentinite (DelPuerto)	0.025 wafer	30°	0.73-6.23	10 <sup>-4</sup>	Dry
63	Serpentinite (DelPuerto)	0.025 wafer	30°	0.74-6.22	10 <sup>-4</sup>	Dry
64	Serpentinite (DelPuerto)	0.025 layer	30°	0.73-6.24	10 <sup>-4</sup>	Dry
65	Serpentinite (DelPuerto)	0.025 layer	30°	0.73-6.25	10 <sup>-4</sup>	Dry
66	Solenhofen Limestone	0.025 wafer	30°	0.74-6.23	10 <sup>-4</sup>	Dry
67	Solenhofen Limestone	0.025 wafer	30°	0.74-6.22	10 <sup>-4</sup>	Dry
68	Talc	--	Intact	1.92-5.87	10 <sup>-4</sup>	Dry
69	Talc	0.020-0.080 wafers	30°	5.45-5.47	10 <sup>-4</sup>	Dry
70	Talc	0.020-0.080 wafers	30°	5.45-5.46	10 <sup>-4</sup>	Dry
71	Talc	0.025 wafer	30°	0.74-6.26	10 <sup>-4</sup>	Dry
72	Talc	0.025 wafer	30°	0.75-6.23	10 <sup>-4</sup>	Dry
73	Westerly Granite	--	Intact	0.41-2.77	10 <sup>-4</sup>	Dry
74	Westerly Granite	--	Intact	5.88-6.27	10 <sup>-4</sup>	Dry
75	Westerly Granite	--	Intact	3.16-6.32	10 <sup>-4</sup>	Dry
76	Westerly Granite	--	Intact	3.13-6.84	10 <sup>-4</sup>	Dry
77	Westerly Granite	--	Intact	6.21	10 <sup>-4</sup>	Dry
78	Westerly Granite	--	Intact	1.61-2.76	10 <sup>-4</sup>	Dry
79	Westerly Granite	--	Intact	1.57-4.85	10 <sup>-5</sup>	Dry

80	Westerly Granite	--	Intact	0.39-6.98	$10^{-5}$	Dry
81	Westerly Granite	--	Intact	0.80-2.85	$10^{-6}$	Dry
82	Westerly Granite	--	Intact	0.42-2.35	$10^{-6}$	Dry
83	Westerly Granite	--	Intact	1.51-4.73	$10^{-6}$	Dry
84	Westerly Granite	--	Intact	2.30-5.45	$10^{-6}$	Dry
85	Westerly Granite	No insert	30°	0.78-3.98	$10^{-4}$	Dry
86	Westerly Granite	No insert	30°	1.61-6.30	$10^{-4}$	Dry
87	Westerly Granite	No insert	30°	0.20-0.98	$10^{-5}$	Dry
88	Westerly Granite	No insert	30°	0.39-0.78	$10^{-5}$	Dry
89	Westerly Granite	No insert	30°	0.20-0.98	$10^{-6}$	Dry
90	Westerly Granite	0.010 layer	30°	1.54	$10^{-4}$	Dry
91	Westerly Granite	0.010 layer	30°	0.74-6.27	$10^{-4}$	Dry
92	Westerly Granite	0.010 layer	30°	0.75-6.24	$10^{-4}$	Dry
93	Westerly Granite	0.010 layer	30°	6.22	$10^{-4}$	Dry
94	Westerly Granite	0.025 layer	30°	0.80-6.27	$10^{-4}$	Dry
95	Westerly Granite	0.040 layer	30°	0.80-6.27	$10^{-4}$	Dry
96	Westerly Granite	0.040 layer	30°	0.74-6.24	$10^{-4}$	Dry
97	Westerly Granite	0.040 layer	30°	0.75-6.22	$10^{-4}$	Dry
98	Westerly Granite	0.080 layer	30°	3.18	$10^{-4}$	Dry
99	Westerly Granite	0.160 layer	30°	0.75-6.27	$10^{-4}$	Dry
100	Westerly Granite	0.160 layer	30°	1.54-6.27	$10^{-4}$	Dry
101	Westerly Granite	0.160 layer	30°	0.74-6.22	$10^{-4}$	Dry

### Berea Sandstone

- Fig. 2,3) 0.040"-thick wafers of Berea sandstone placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite  
Confining pressures: 0.78 to 6.27 kb  
Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$
- Fig.4,5) 0.080"-thick wafers of Berea sandstone placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite  
Confining pressures: 0.78 to 6.26 kb  
Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$

#### Comments:

For most samples the stress levels reached at a given confining pressure were approximately the same regardless of wafer thickness. However, wafer thickness affected the stability of sliding, with the thicker wafers being more stable at a given confining pressure.

The 0.040" layers exhibited stick slip as low as 1.58 kb. The highest confining pressure at which there were no stress drops was 2.35 kb.

For the 0.080" layers pressures of 3.15 and 3.94 kb produced only slight stress drops. Major stress drops began at 4.69 kb.

The two small stress drops at 0.78 kb in fig 5 appear to be anomolous, as a number of samples run at the same or greater confining pressure were stable.

At approximately 3 to 5 kb confining pressure the stress rise was delayed more in the 0.080" wafers than in the 0.040" wafers. The maximum stress levels attained were approximately the same in both cases, but more shearing was required with the 0.080" samples to reach the maximum stress.

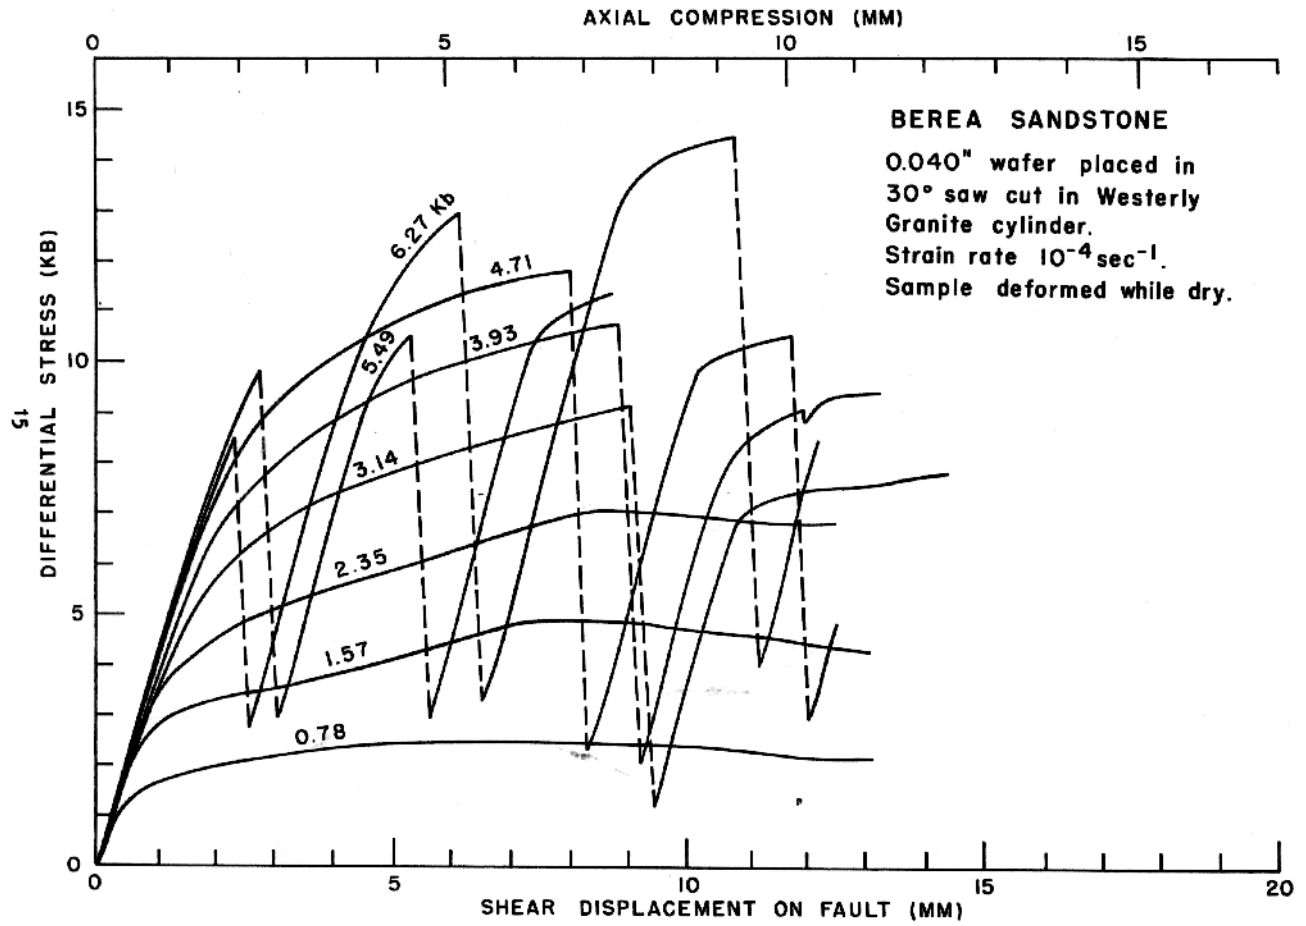


FIG. 2



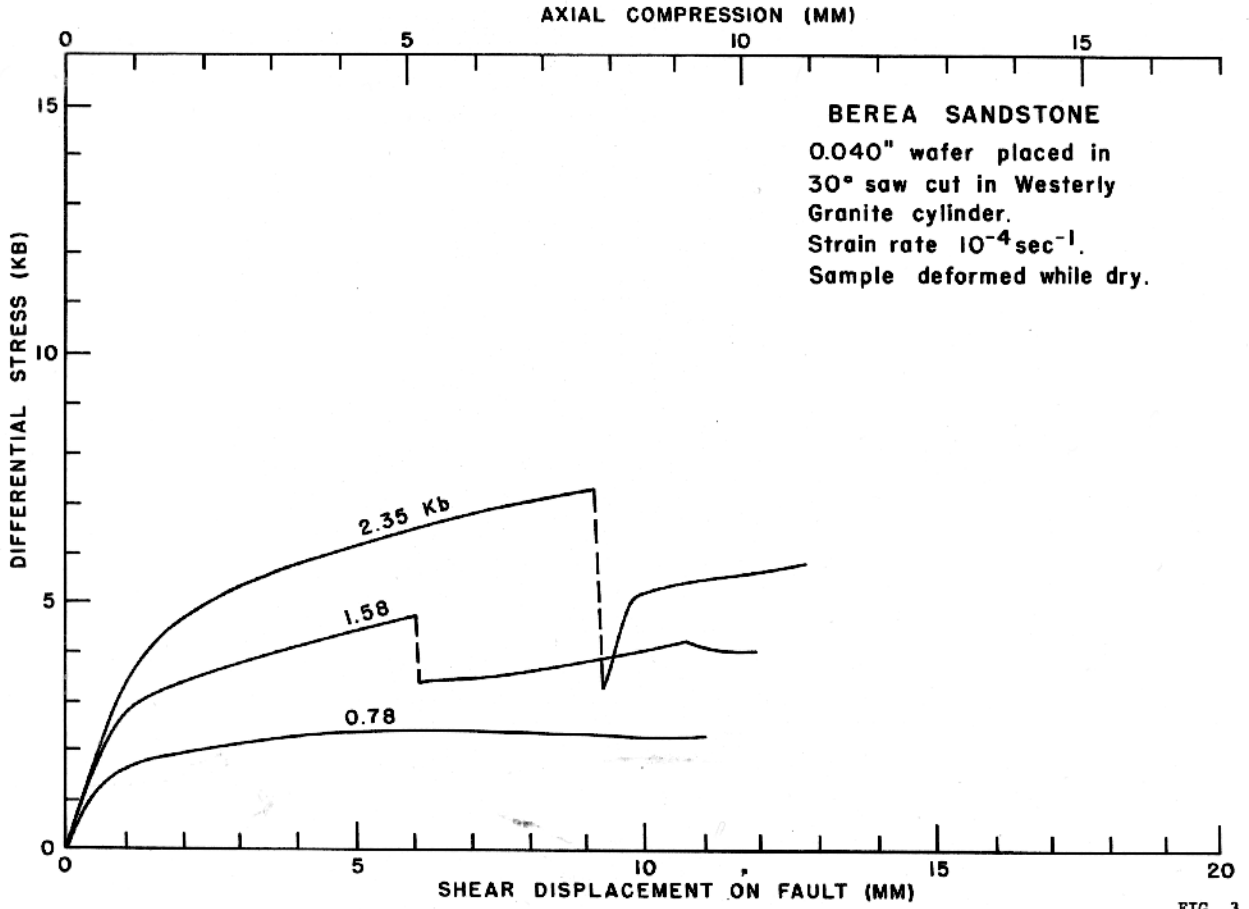


FIG. 3



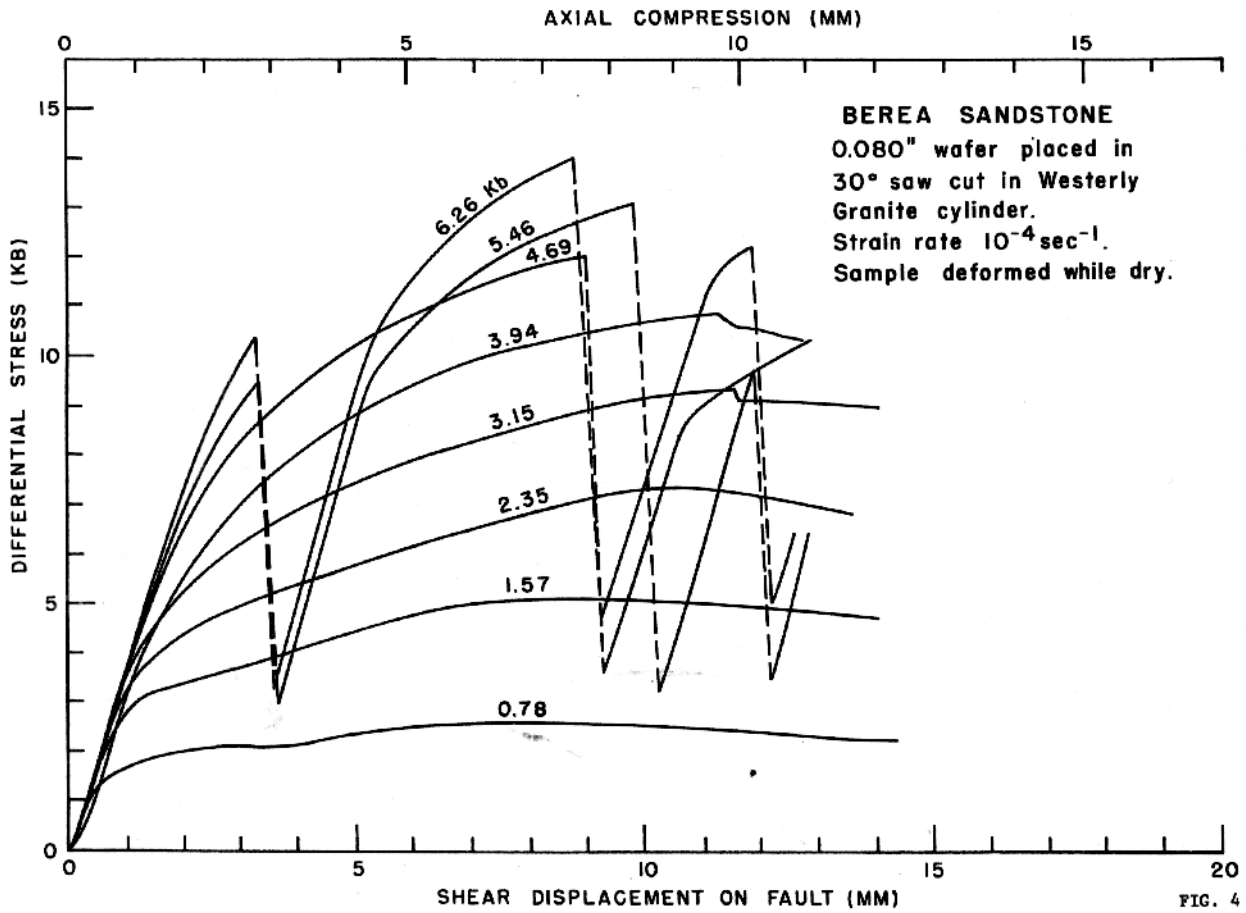

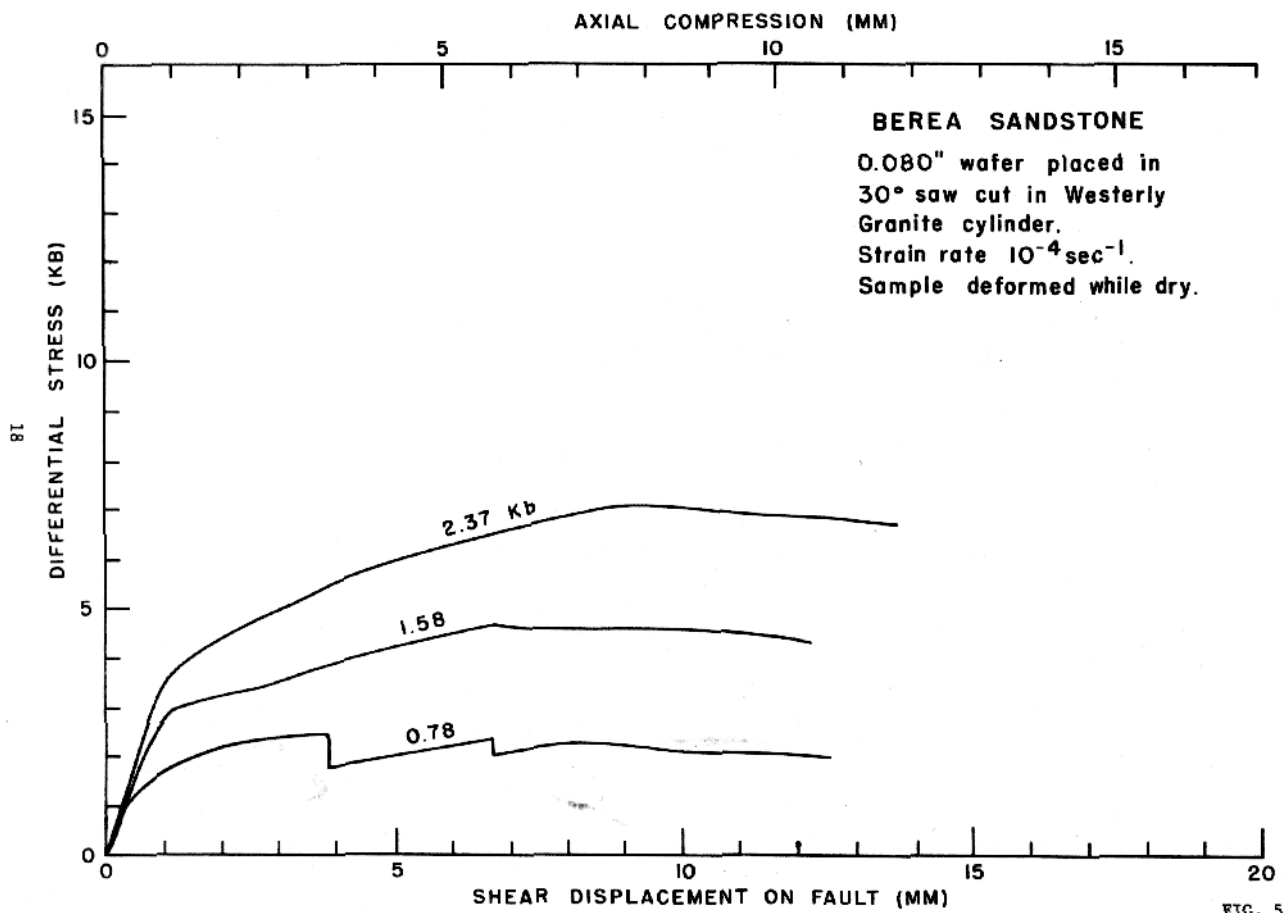

## Chlorite

Fig.6,7) 0.025"-thick wafers of ripidolite chlorite from Flagstaff Hill, California, cut parallel to the 001 cleavage plane and placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite.

Confining pressures: 0.73 to 6.27 kb

Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$


### Comments:

The samples run at 3/4 and 1 1/2 kb were stable. The samples run at 3.12 and 6.26 kb included a number of large unstable stress drops.

Stress levels supported at all confining pressures were surprisingly high.

There was a large amount of creep preceeding the first stick slip event at 6 1/4 kb. This was similar to the creep observed at high pressure in materials such as serpentinite and the non-expanding clays.

The samples run at 3.12 and 1.53-1.54 kb exhibit a wavering differential stress level during deformation. This effect appears in several other materials, most notably in the illite clay.

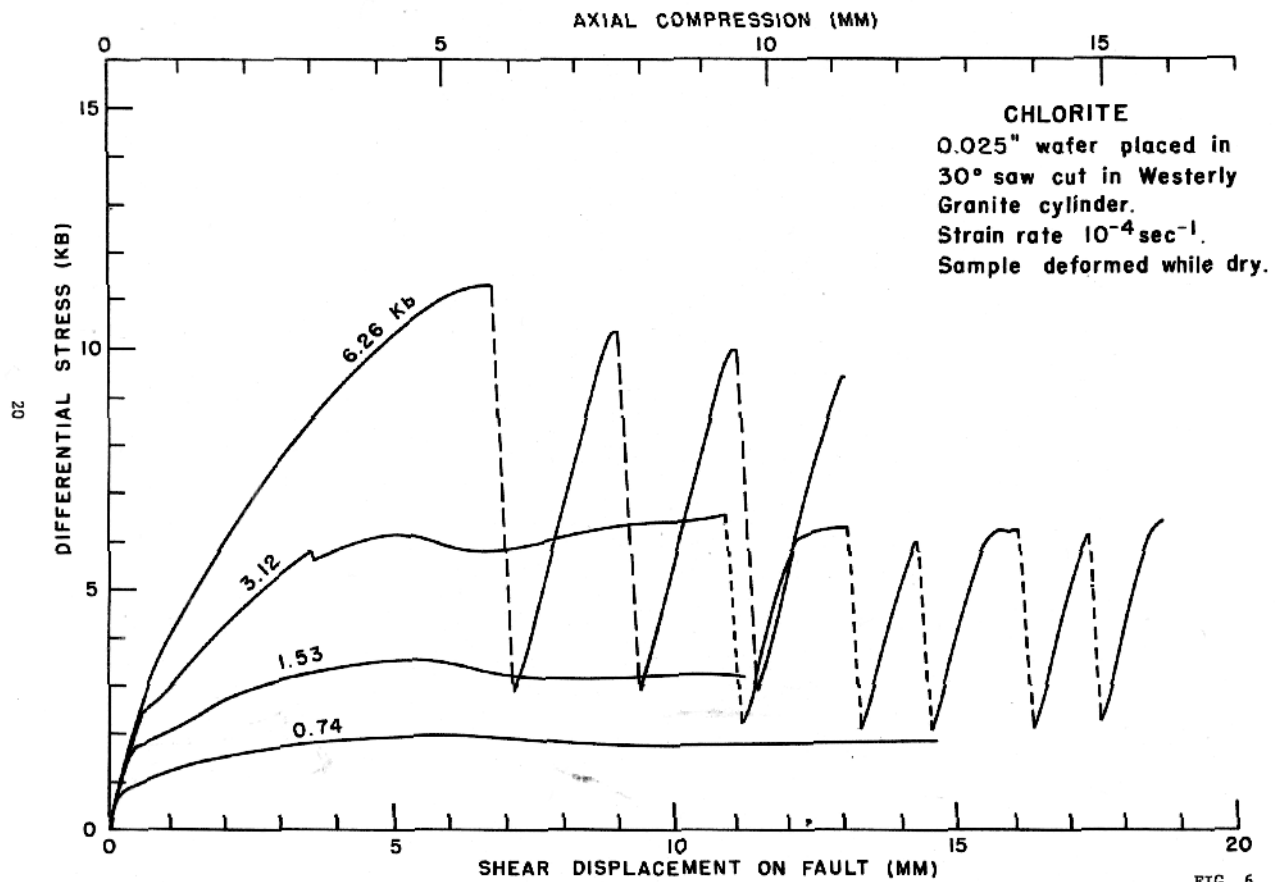



## Clays

Fig. 8,9) Halloysite - dried (0.025" thickness as were all the following)

10) Kaolinite - dried

11,12) Illite - dried

13) Illite - water saturated

14,15) Montmorillonite - dried

16) Montmorillonite - water saturated

17,18) Vermiculite - dried

19) Air dried clays compared: Halloysite, Illite, Kaolinite, Montmorillonite, Vermiculite

Confining pressures: 0.73 to 6.27 kb

Axial compression strain rates:  $10^{-4} \text{ sec}^{-1}$ ,  $10^{-5} \text{ sec}^{-1}$

### Comments:

The Halloysite clay (Fig. 8,9) samples were prepared with water and dried in a vacuum oven. They support high stresses and deform unstably at 3.14 and 6.27 kb. The samples at 1.57 kb deformed mostly stably with a total of two small stress drops, and only one large one. At high confining pressures these samples had relatively large amounts of stable sliding preceeding the first stress drop when compared with similar samples made up using Westerly Granite. This large amount of stable sliding also was observed with the serpentinite and chlorite.

The kaolinite (Fig. 10) was prepared with water and dried in a vacuum oven before running. The 1.58 kb sample developed

## Clays (cont)

regular stick slip after a prolonged period of stable sliding. The samples run at 3.15 and 7.27 kb had initial periods of stable sliding and then developed regular stick slip.

The illite samples (Fig. 11,13) were prepared in three different ways which affected both the differential stress level supported and the stability of sliding. The samples in Fig. 11 were prepared with water and dried in a vacuum oven before running. A minor stress drop occurred at 1.53 kb, two major stress drops at 3.12 kb.

Similar samples of illite (Fig. 13) prepared using ethanol instead of water and dried in a vacuum oven produced a major stress drop at 1.53 kb, and regular stick slip at 3.14 kb. The stress levels at all confining pressures were higher than with the water prepared samples. The gradual stress decrease that occurred with the 3.12 kb water prepared illite sample was absent.

The third set of illite samples were run while water saturated. As can be seen in Fig. 13, those samples run at 6.26-6.27 kb were stable, and had significantly lower stress levels than did the dry samples. The samples that were allowed to drain longer before deforming supported higher differential stress.

The montmorillonite samples (Fig. 14,15) were prepared with ethanol and dried in a vacuum oven. All were stable and supported low stress levels. The samples in Fig. 15, which were dried for a longer time, support higher stress levels than those in Fig. 14.

The montmorillonite samples in Fig. 16 were prepared with water and run while water saturated. They support very low stress and deform stably.

## Clays (cont)

The vermiculite samples (Fig. 17,18) were prepared with water and dried in a vacuum oven. With the exception of several minor stress drops, the deformation is stable up to 6.27 kb. Up to 1.57 kb the stress soon reaches a maximum and does not increase with deformation. At 3.14 to 6.27 kb the stress level continues to increase with continued deformation to the limit of our experiment.

Figure 19 compares air dried samples of 0.025" thick layers of Halloysite, Illite, Kaolinite, Montmorillonite, and Vermiculite. All of this set of samples were prepared wet and air dried before running. The non-expanding clays (Halloysite, Illite, and Kaolinite) were unstable; the expanding clays (Montmorillonite and Vermiculite) were stable. In addition, the stress levels supported by the expanding clays were very low compared to those supported by the non-expanding clays.



AXIAL COMPRESSION (MM)

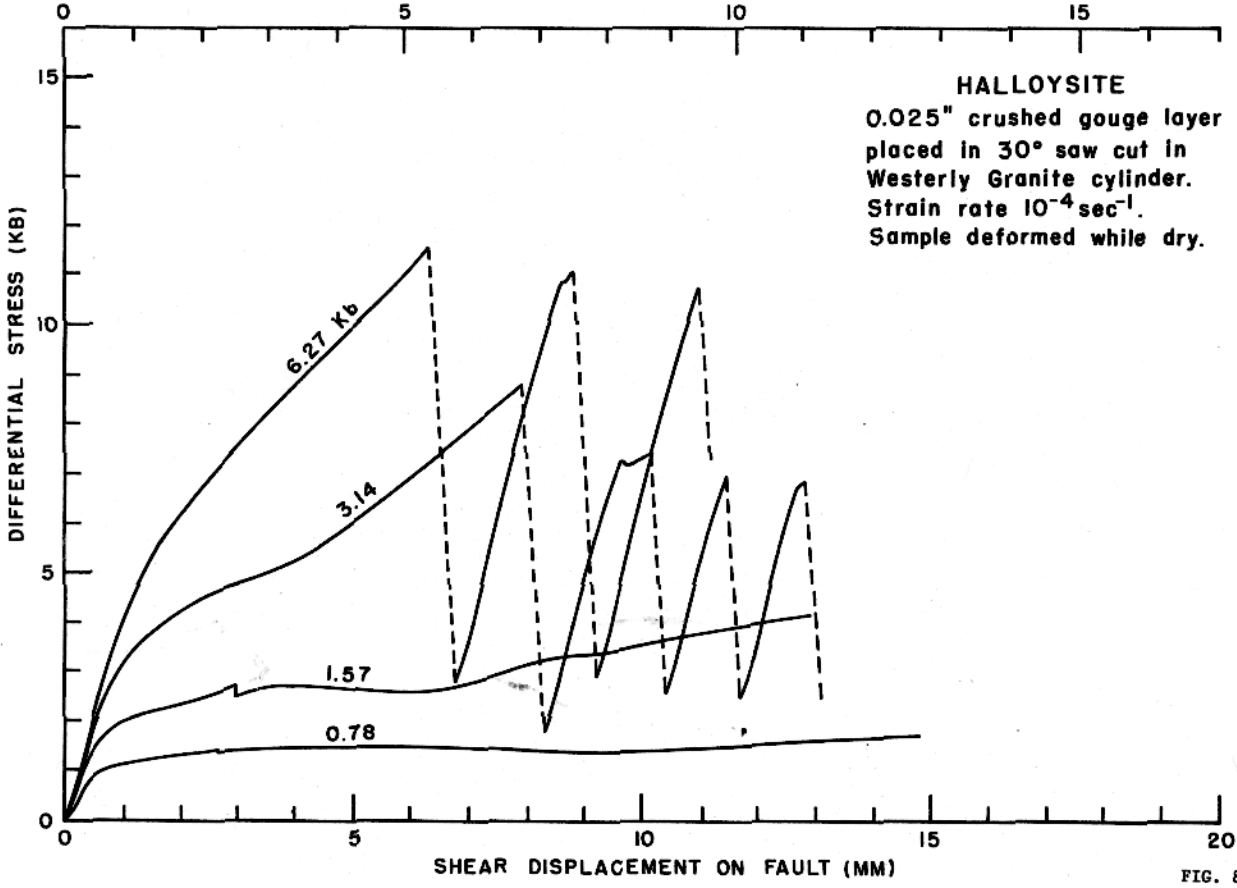


FIG. 8

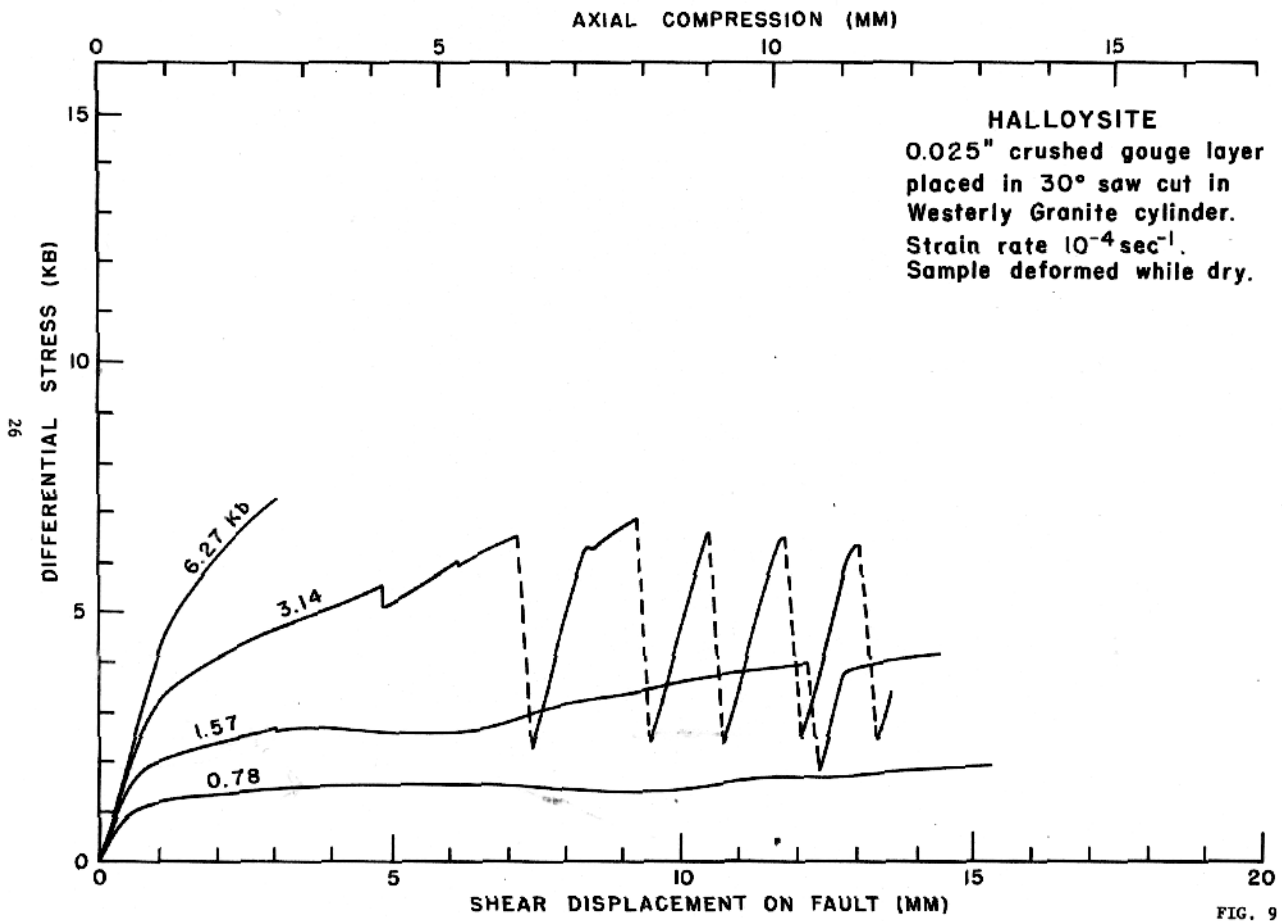


FIG. 9

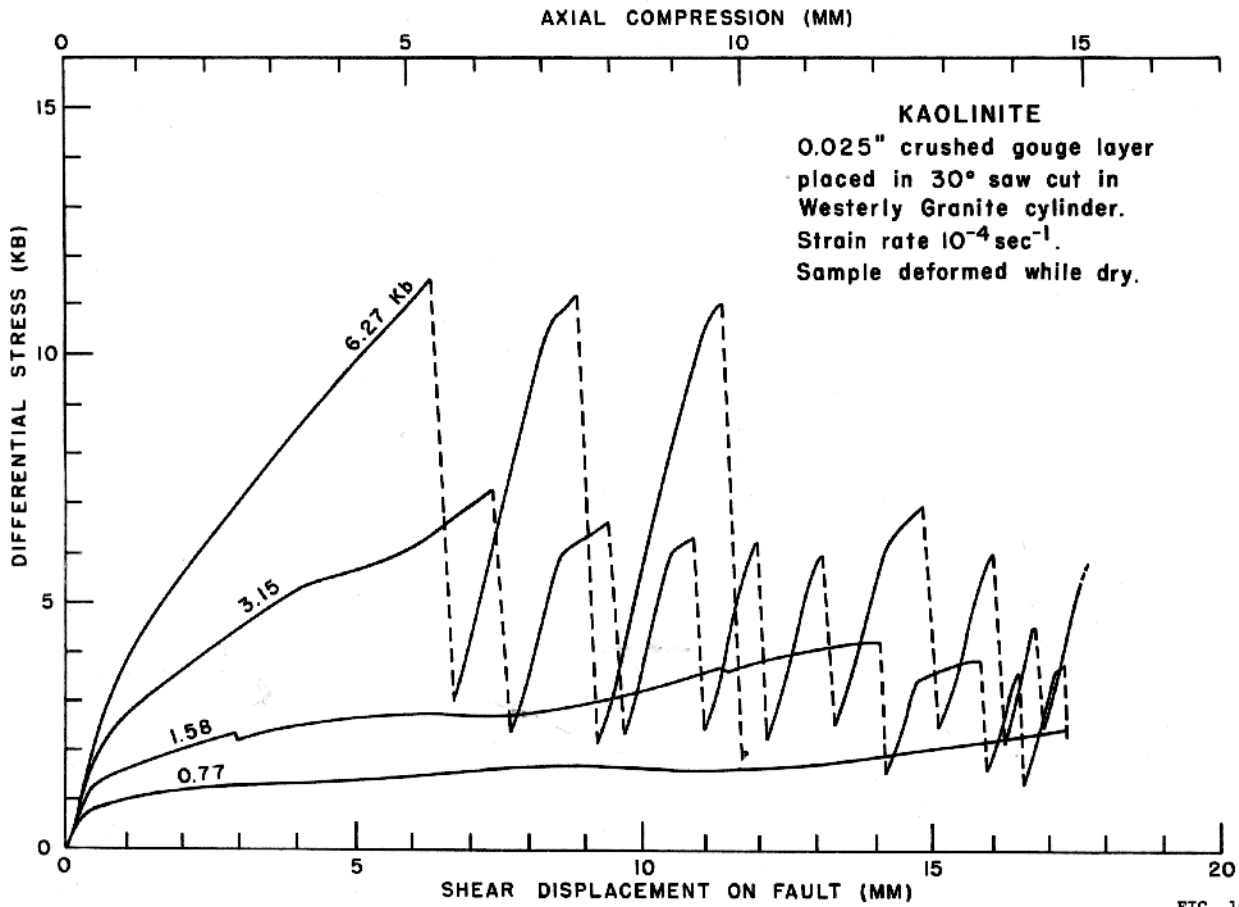
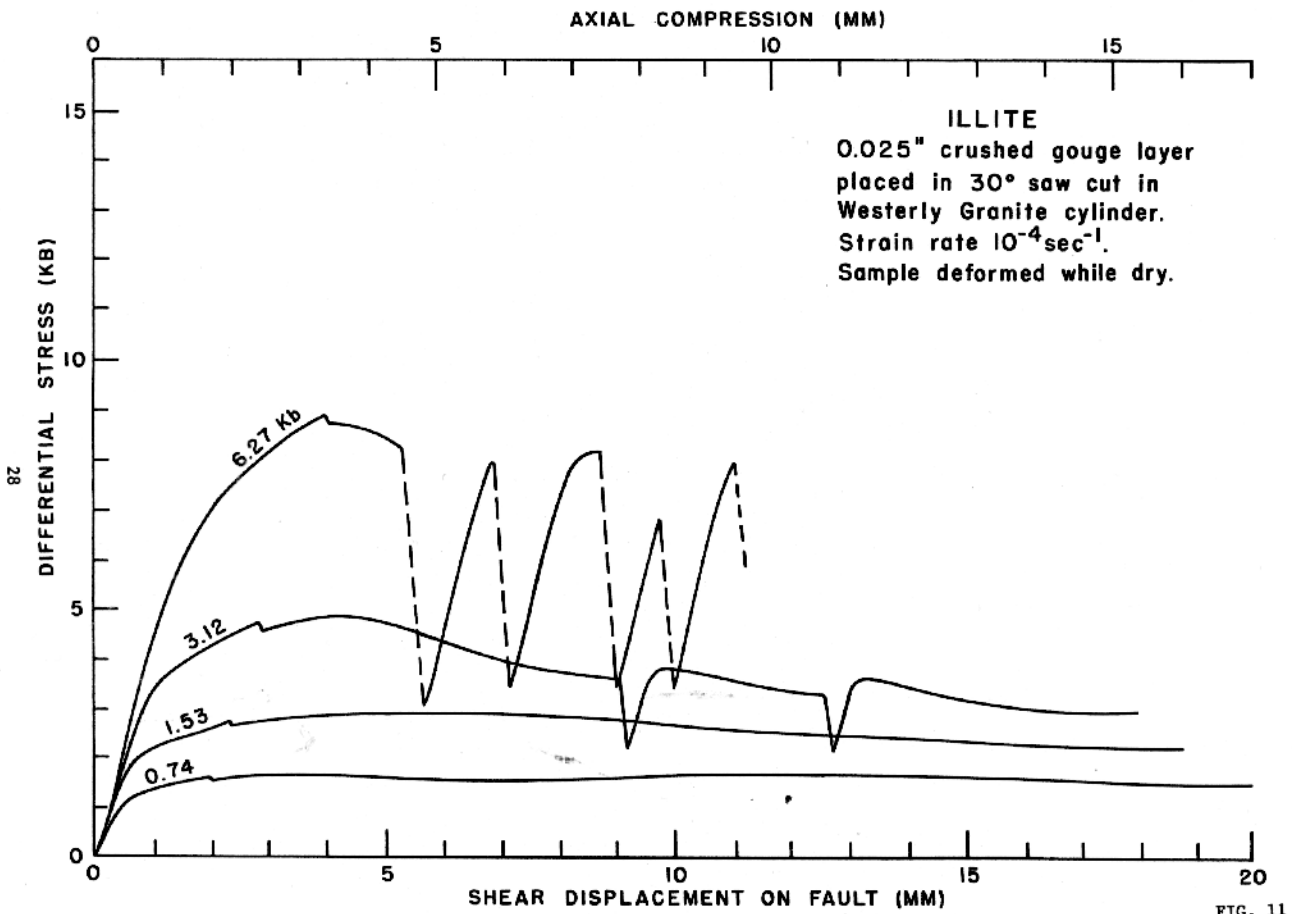


FIG. 10



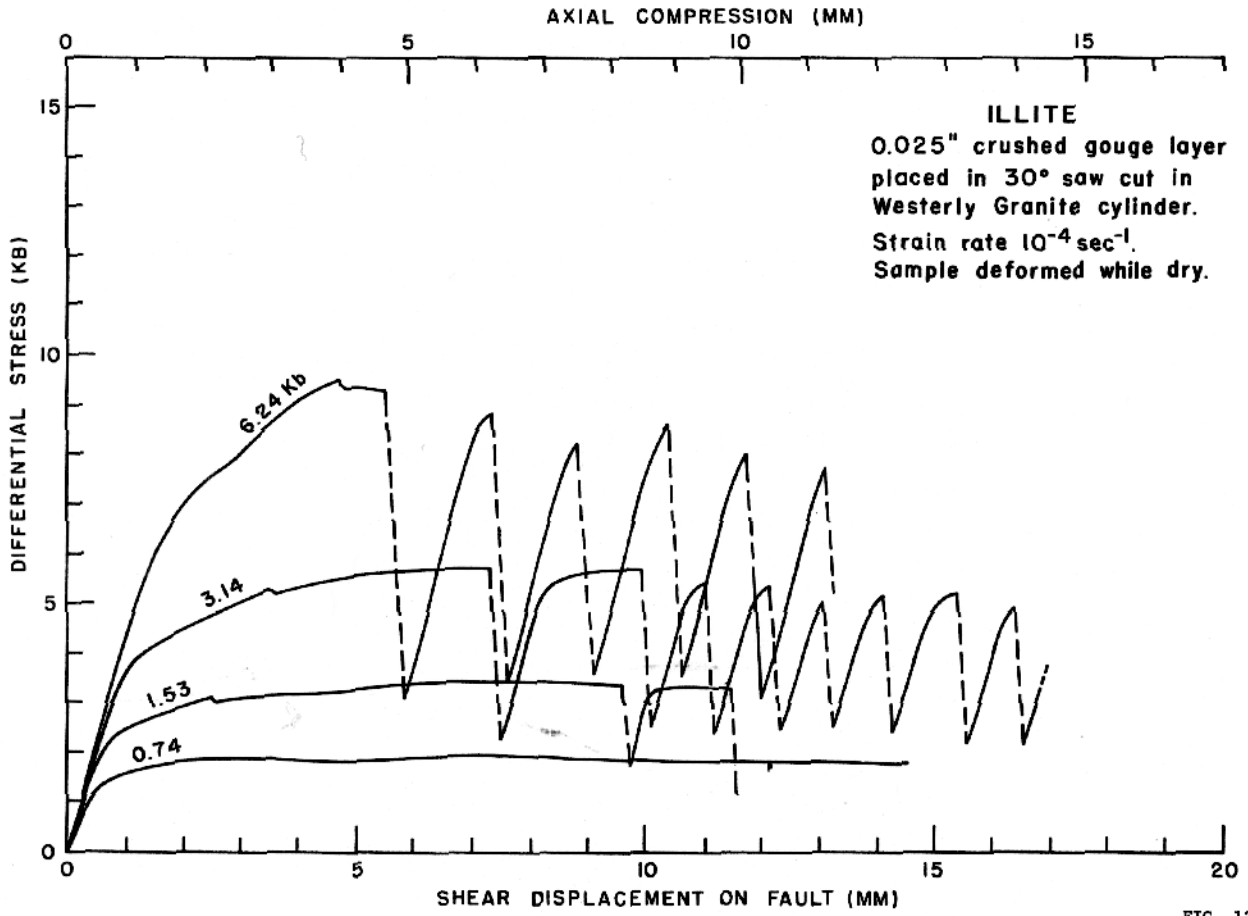


FIG. 12

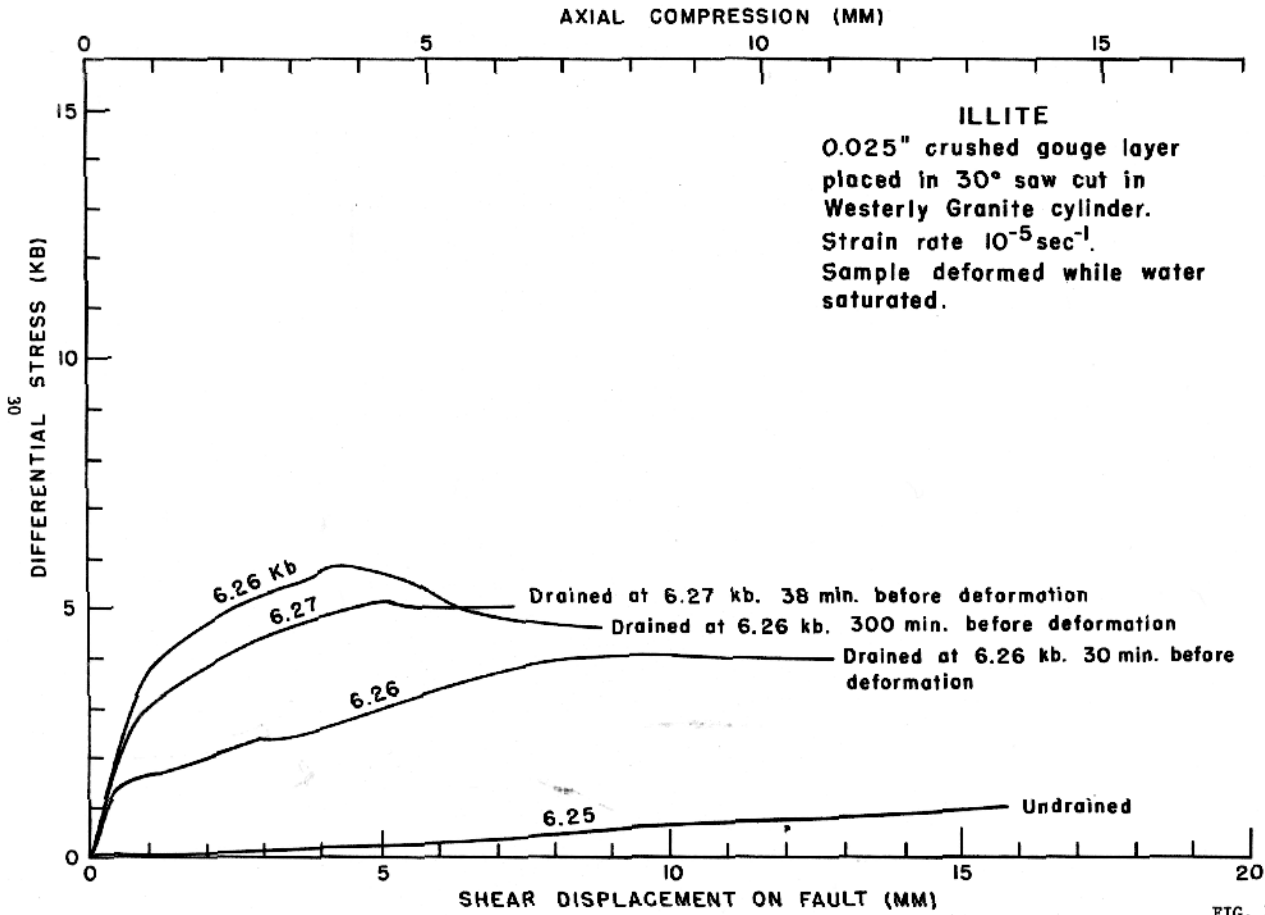


FIG. 13

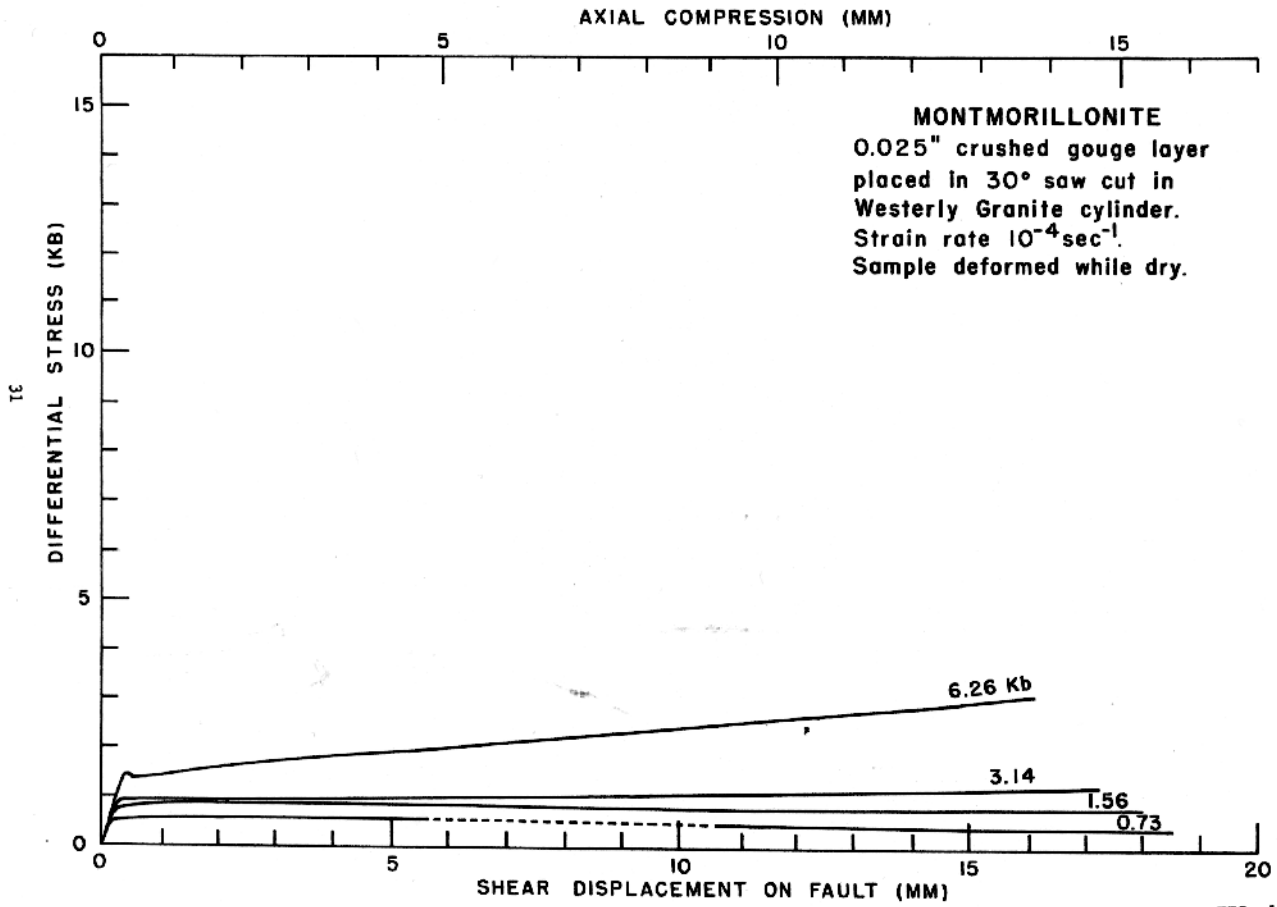


FIG. 14

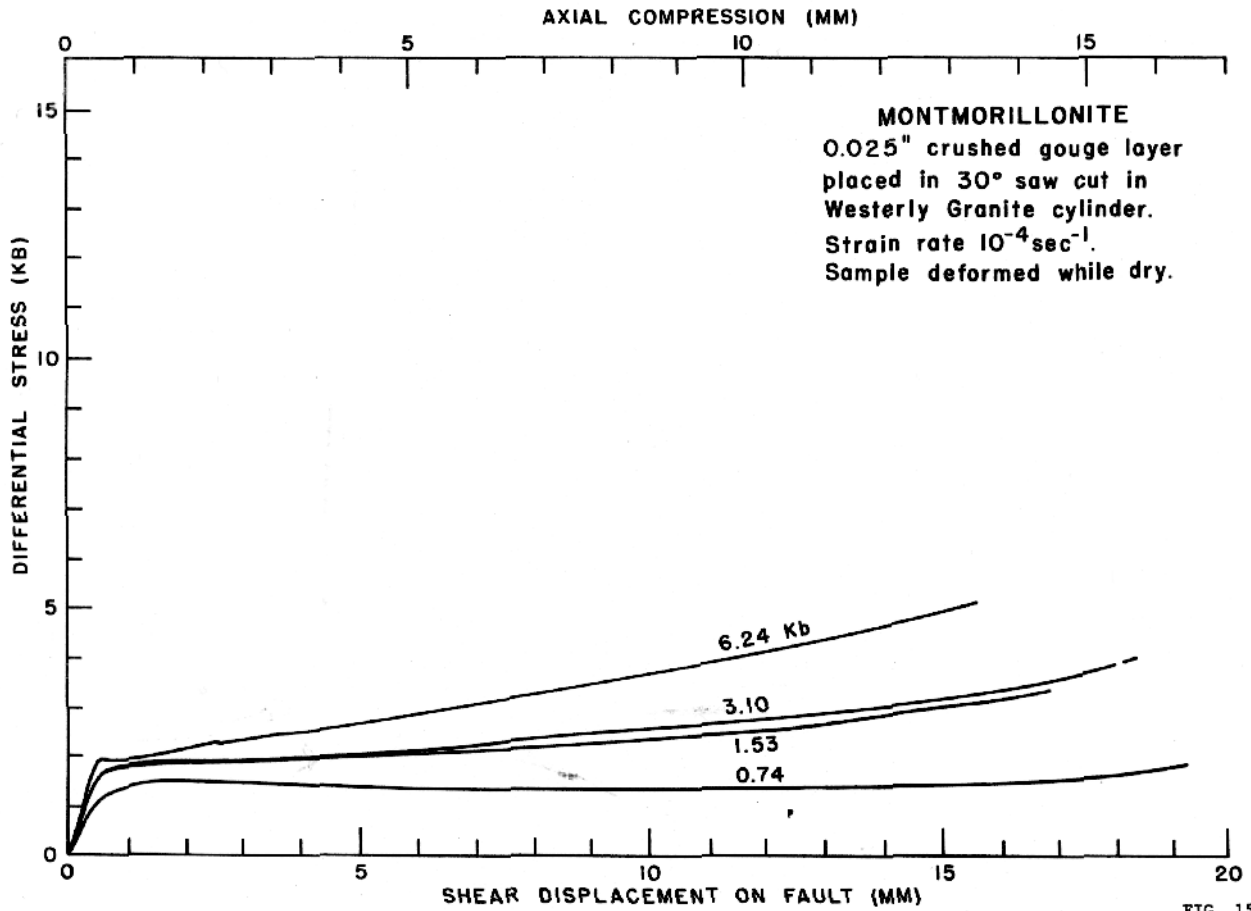


FIG. 15





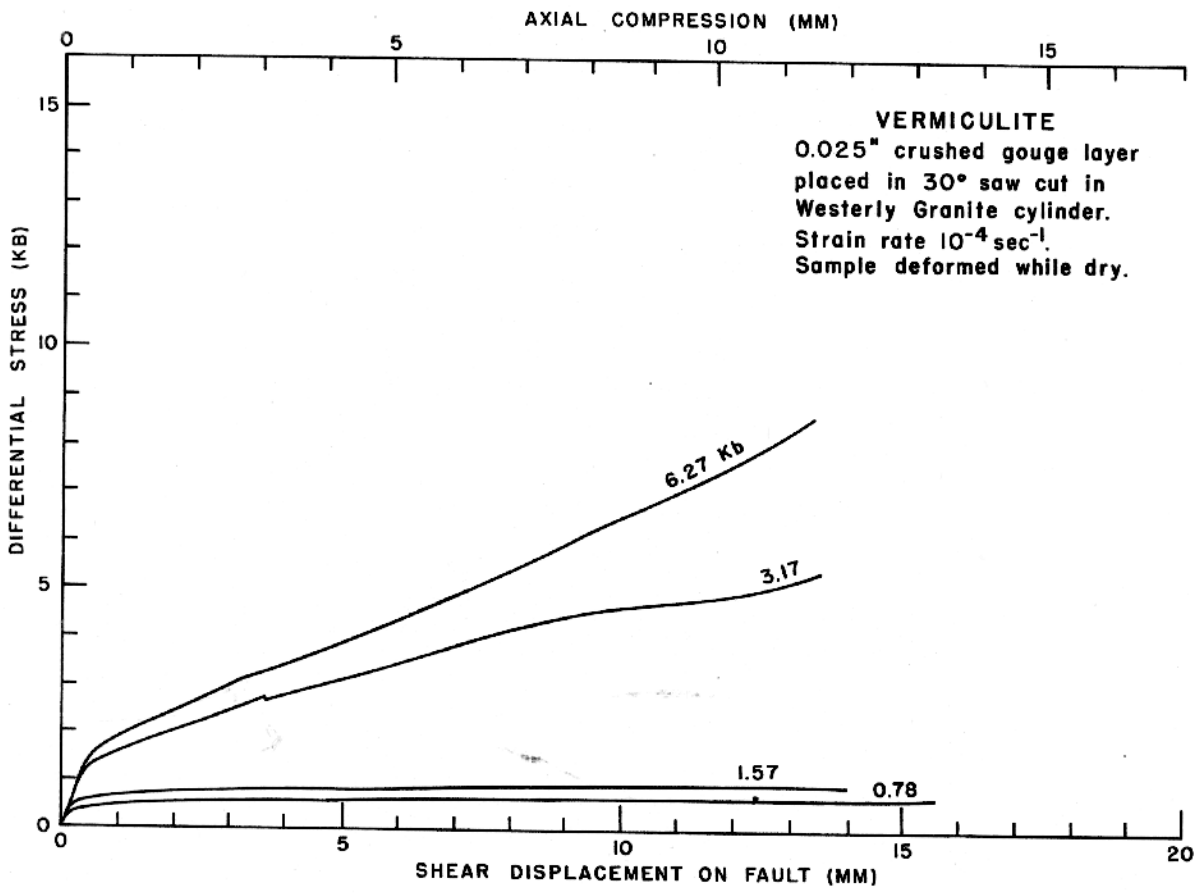


FIG. 17

AXIAL COMPRESSION (MM)

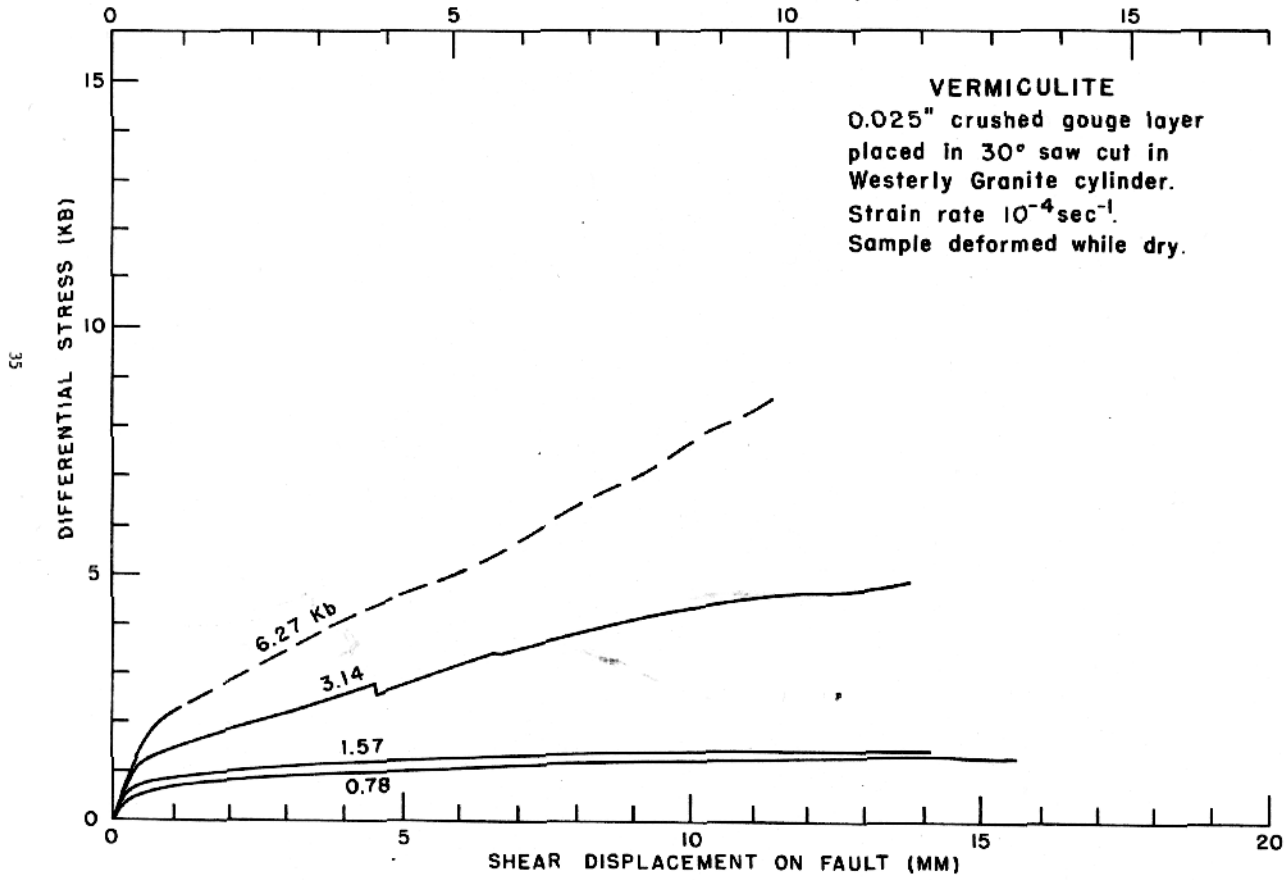


FIG. 18



## Graphite

Fig. 20,21) 0.025"-thick wafers of graphite placed in a 30° sawcut  
in 1" x 2.5" cylinders of Westerly Granite

Confining pressure: 0.74 to 6.26 kb

Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

### Comments:

At the lower pressures of 0.74 and 1.53 kb the stress levels were very low and stabilized at a constant value after 1/2 mm of deformation. At 3.10 kb the stress level rose slowly as the displacement progressed. At 6.26 kb the increase in stress level with deformation was more pronounced.

Upper and lower yield points were observed for all the graphite samples from 3/4 to 6 1/4 kb. Similar distinct upper and lower yield points were also observed in some samples of limestone and montmorillonite. The two yield points observed with these samples apparently represent a drop in strength which occurs as frictional sliding begins.

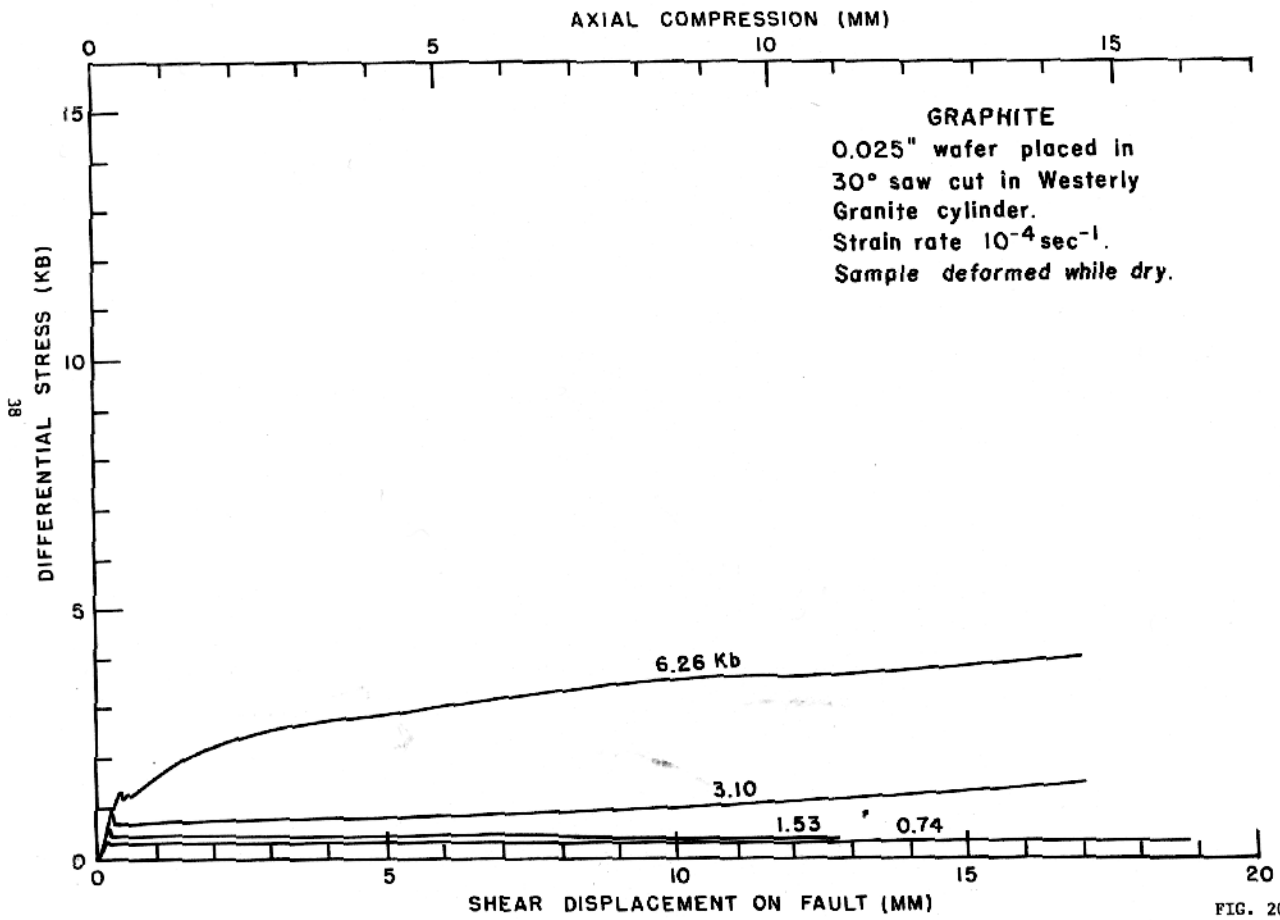


FIG. 20

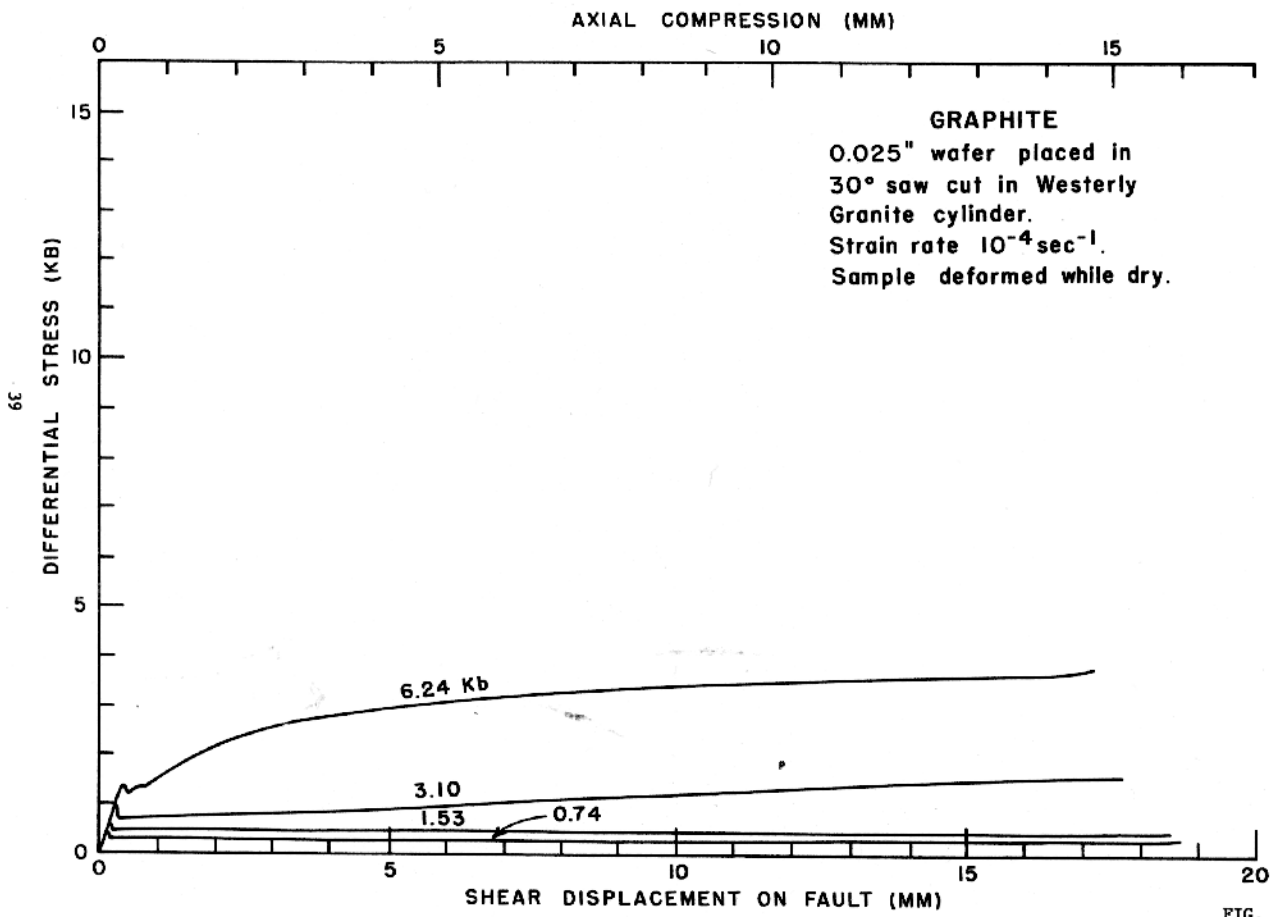


FIG. 21

## Muscovite

Fig. 22-24) 0.025"-thick intact cleavage sheets placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite  
Confining pressures: 0.78 to 6.35 kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

25) 0.025"-thick layer of crushed muscovite place in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite  
Confining pressure: 6.27 kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

### Comments:

The intact cleavage sheets (Fig 22-24) consistently supported only low stress, with the deformation being stable. Only a single very small stress drop occurred in one sample at 6.35 kb.

The crushed muscovite (Fig. 25) was prepared by placing cleavage fragments in a blender with water for 5 minutes. The samples were assembled wet and dried before deforming.

The behavior of the crushed muscovite by contrast with the cleavage sheets was radically different. Differential stress levels of up to 11 kb were observed, and there was regular violent stick slip failure. During the first stress rise there was an elastic yield point at just over 2 kb. This yield did not occur on the succeeding stress rises, even though stress levels reached 9-10 kb.

This raising of the elastic limit was also observed with other materials, including chlorite, kaolinite, and halloysite. This appears to be a work hardening effect resulting from the crushing and altered packing during the shearing to which the samples have been subjected.



AXIAL COMPRESSION (MM)

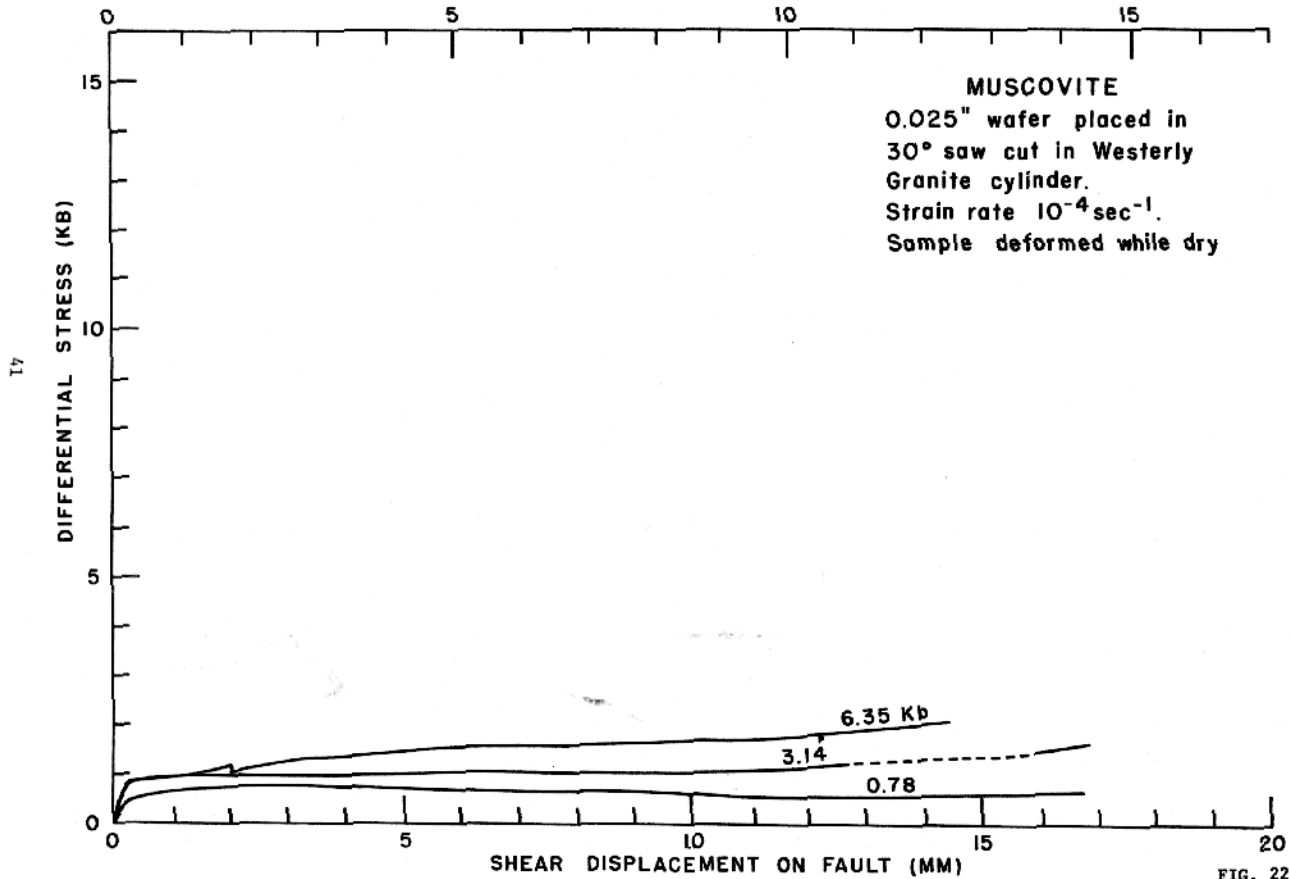


FIG. 22

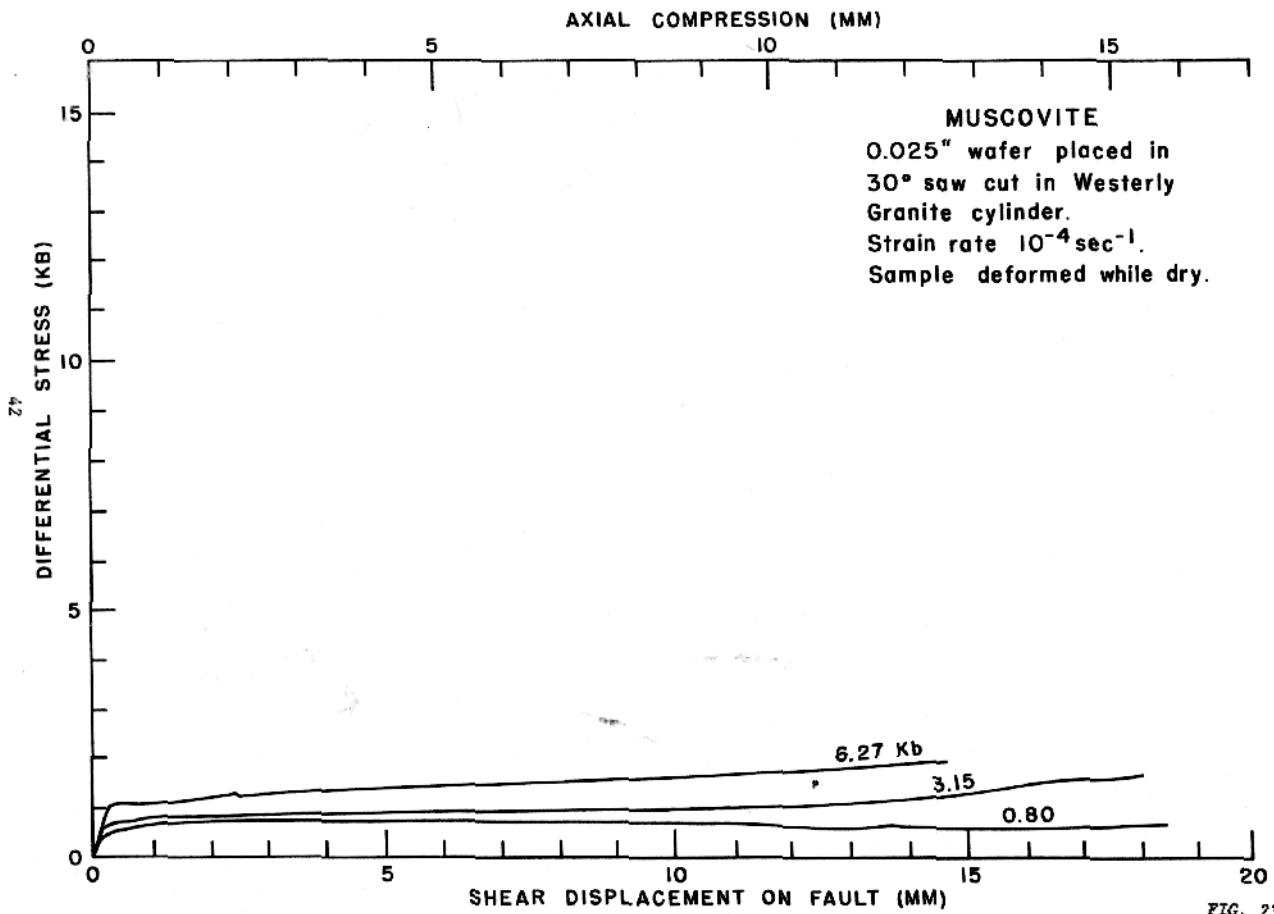


FIG. 23

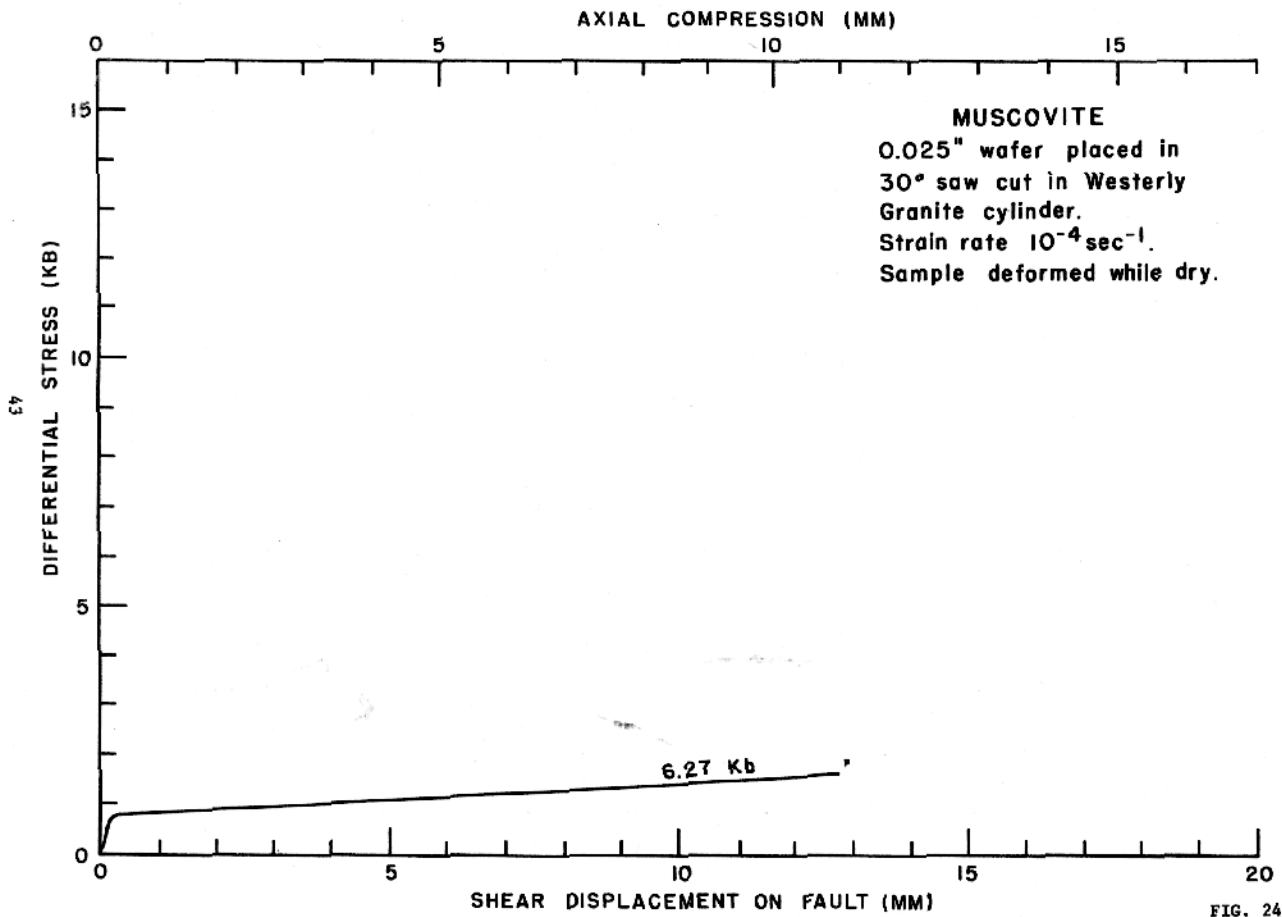


FIG. 24

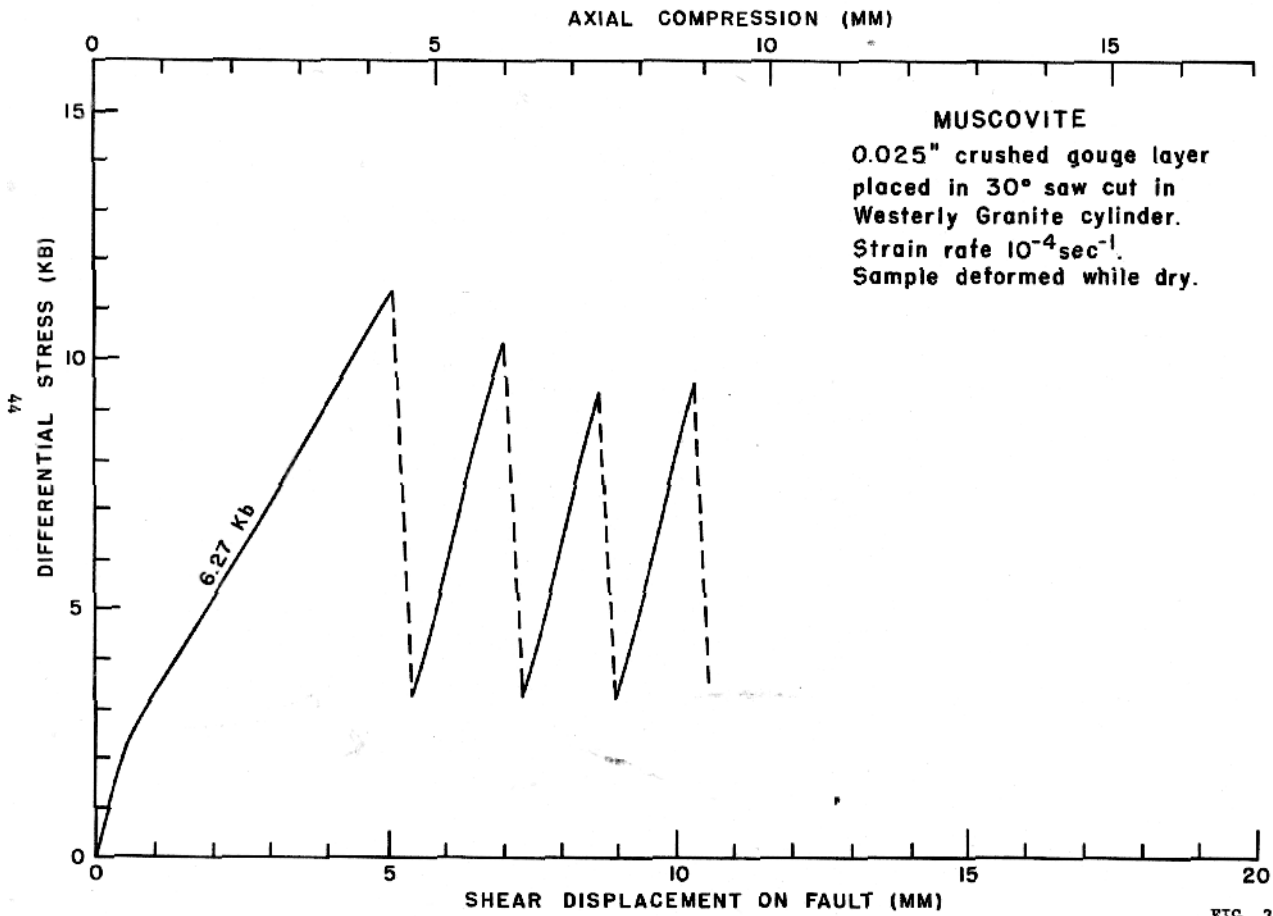


FIG. 25

## Ottawa Quartz Sand

Fig. 26-57) 0.080" and 0.160" layers of Ottawa Quartz sand (ASTM N°C109) placed in 30° or 45° sawcut in a 1" x 2.5" cylinder of Westerly Granite

Confining pressures: 2.00, 2.60, and 4.70 kb

Axial compression strain rates:  $10^{-5} \text{sec}^{-1}$ ,  $10^{-7} \text{sec}^{-1}$

### Comments:

This series of stress-strain charts was produced during a study of the development of shear structures in an artificial gouge zone. Two thicknesses of gouge were used to investigate their effect on crushing and shearing. The confining pressure was varied to produce stable sliding (at 2.00kb) and stick slip (at 4.70 kb). Most of the samples were used with a 30° fault angle. Two samples were running a 45° fault angle. This was done to determine if the angle of the oblique shear zones that were observed in the gouge were controlled by the fault boundary or by the direction of the maximum principle stress. It was found that the angle of the shears was controlled by the fault boundary.

Thin sections were cut from all of the quartz sand samples to study the shear structures which developed in the gouge zone. The results of this part of the work described in the paper "Structures Developed in Fault Gouge During Stable Sliding and Stick-slip" by J. Byerlee, V. Mjachkin, R. Summer, and O. Voevoda.

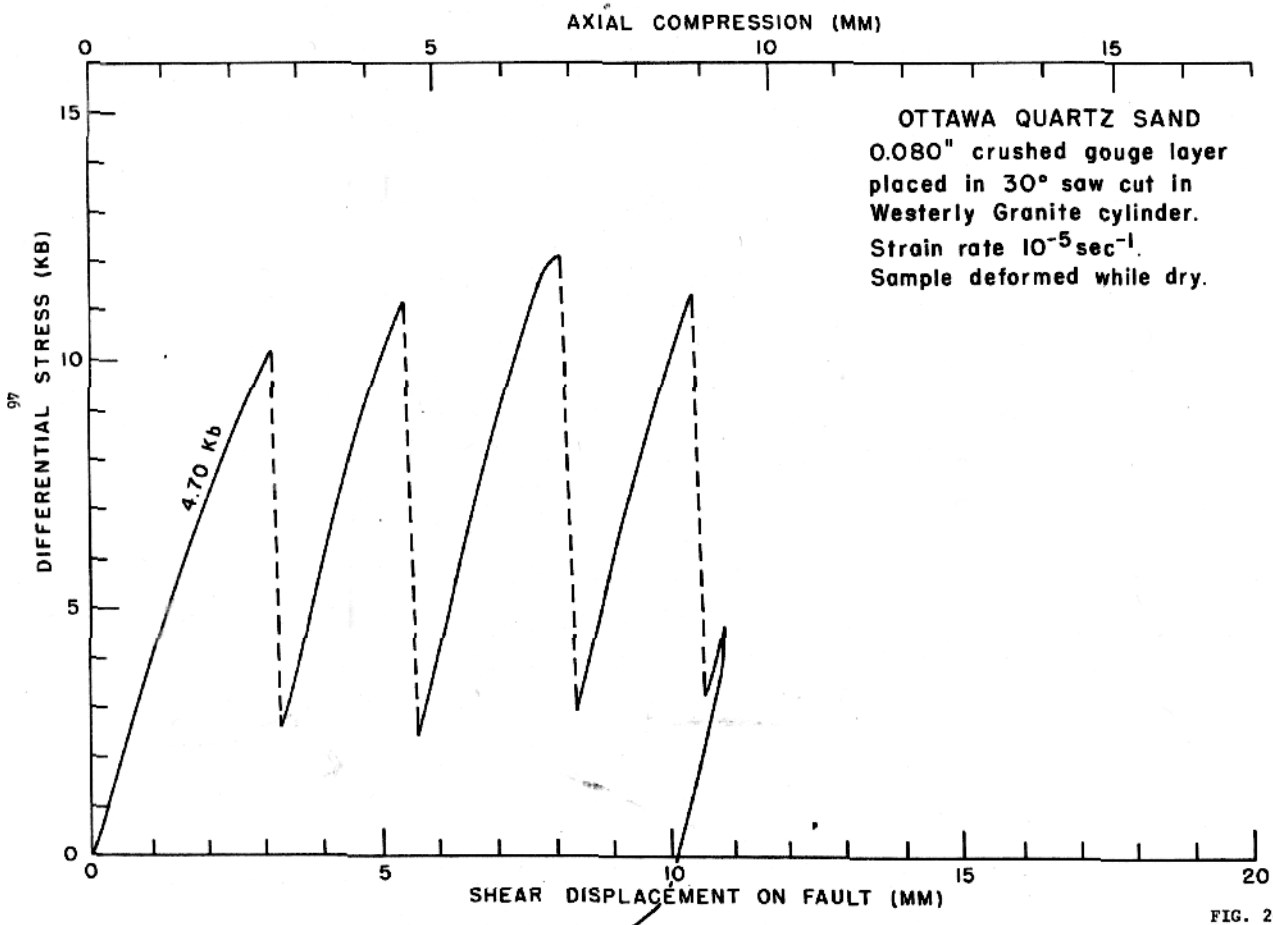


FIG. 26

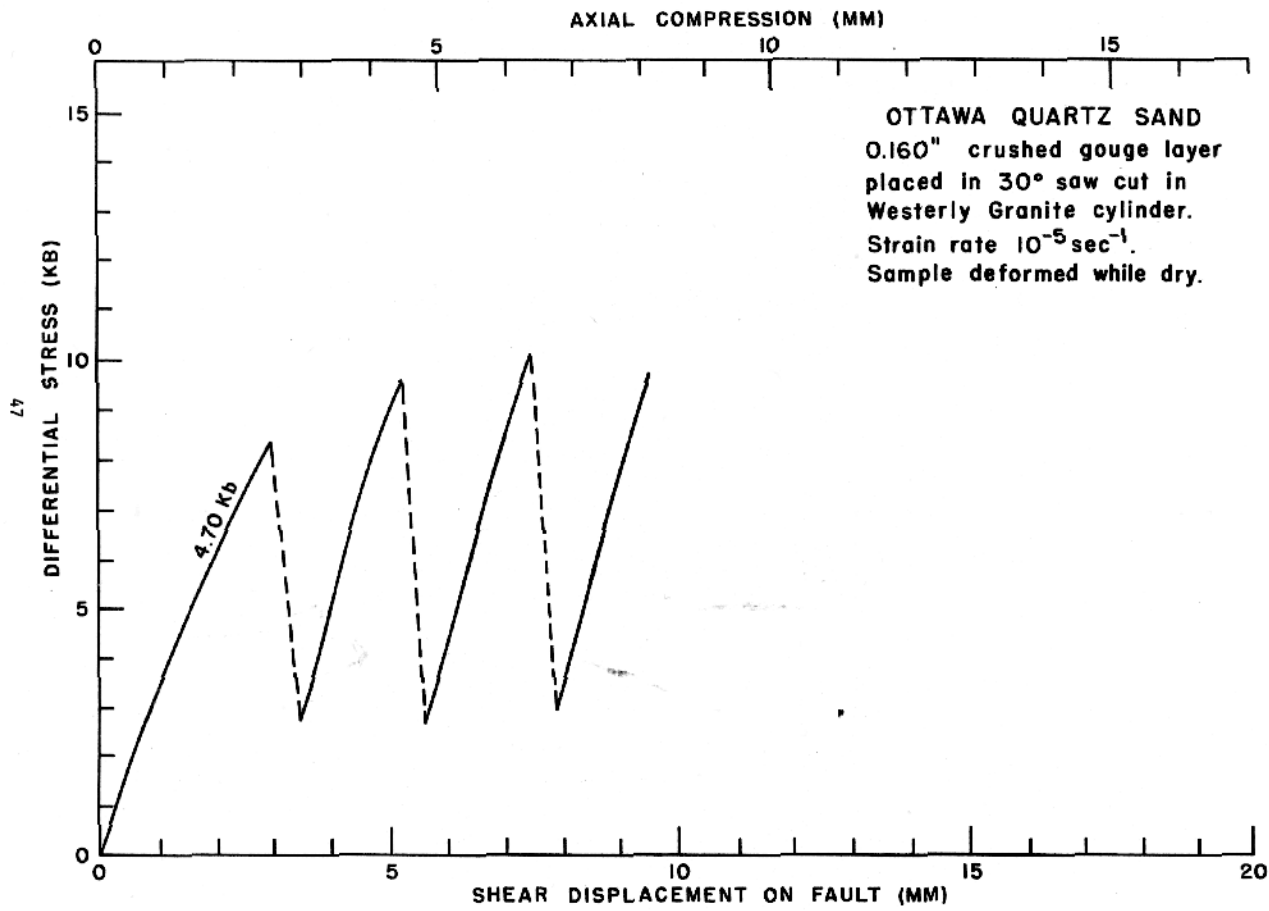


FIG. 27

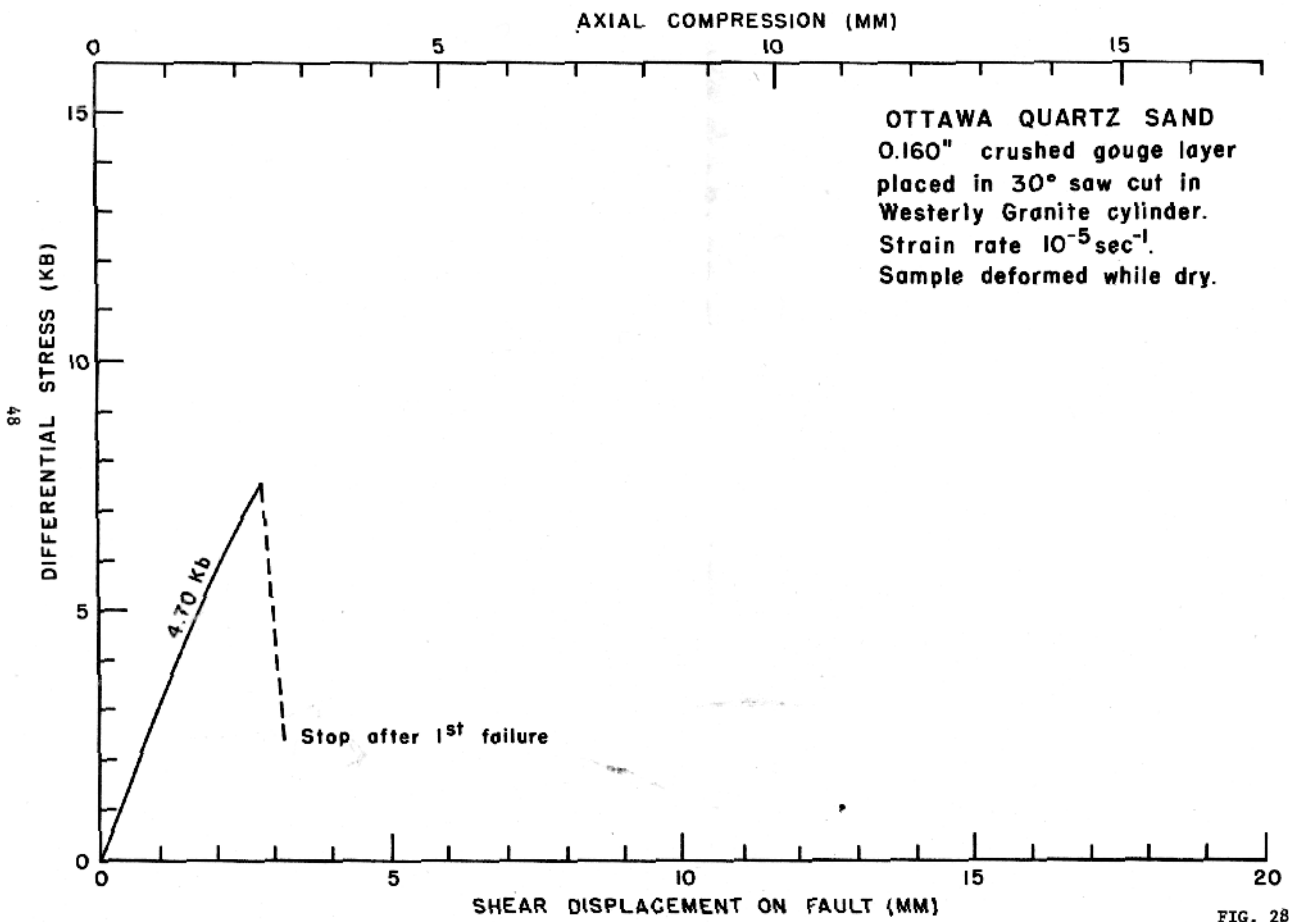


FIG. 28



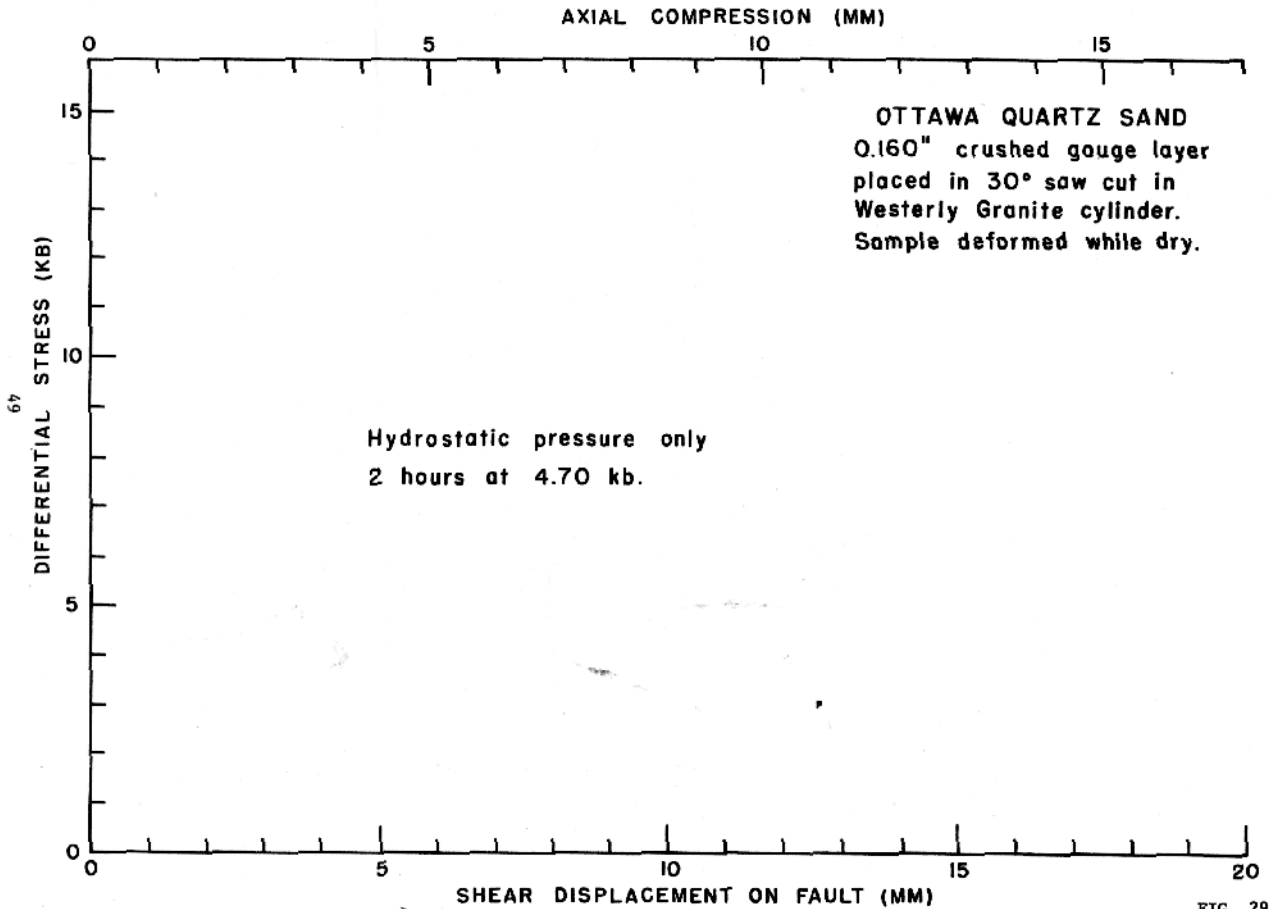
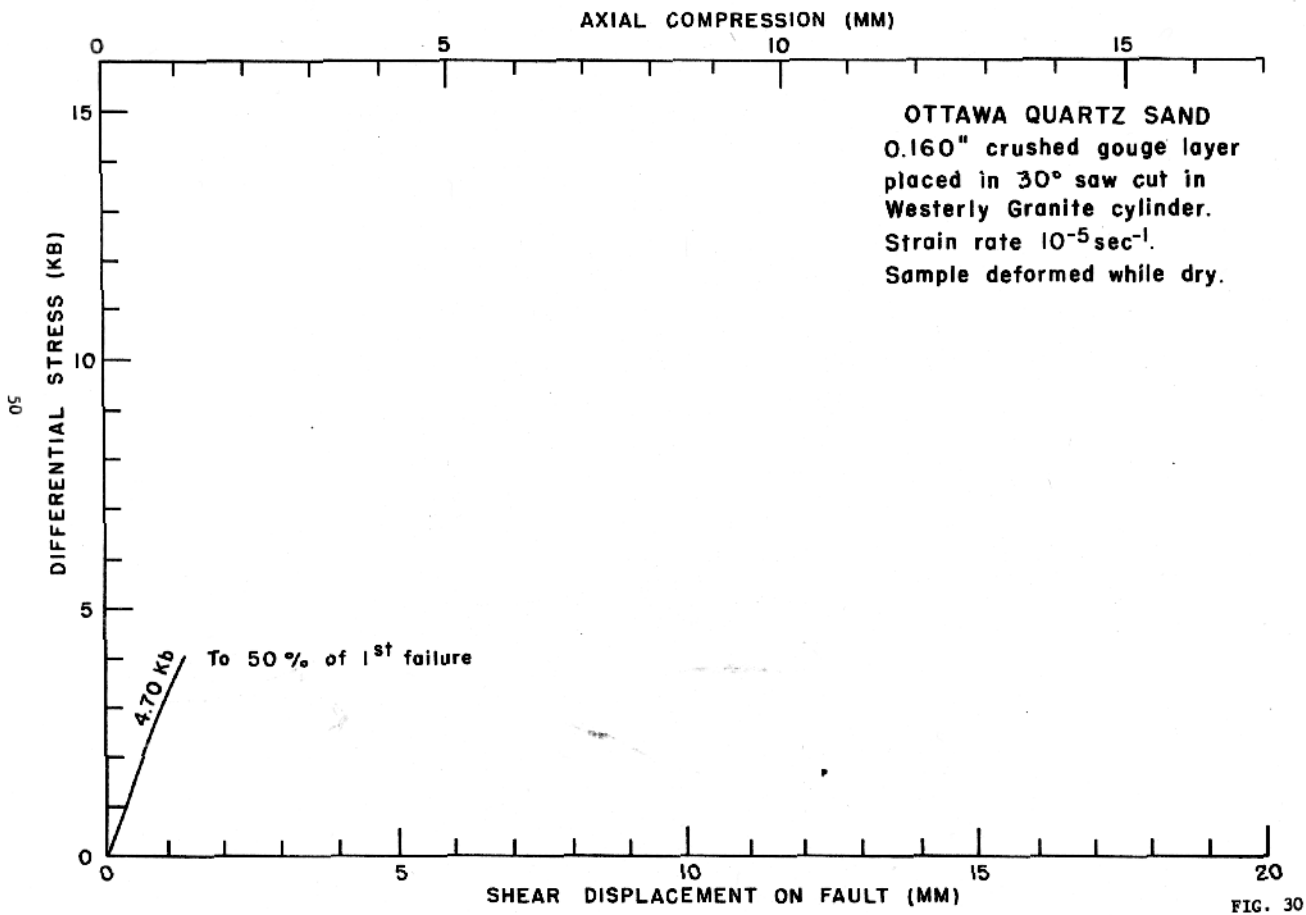


FIG. 29



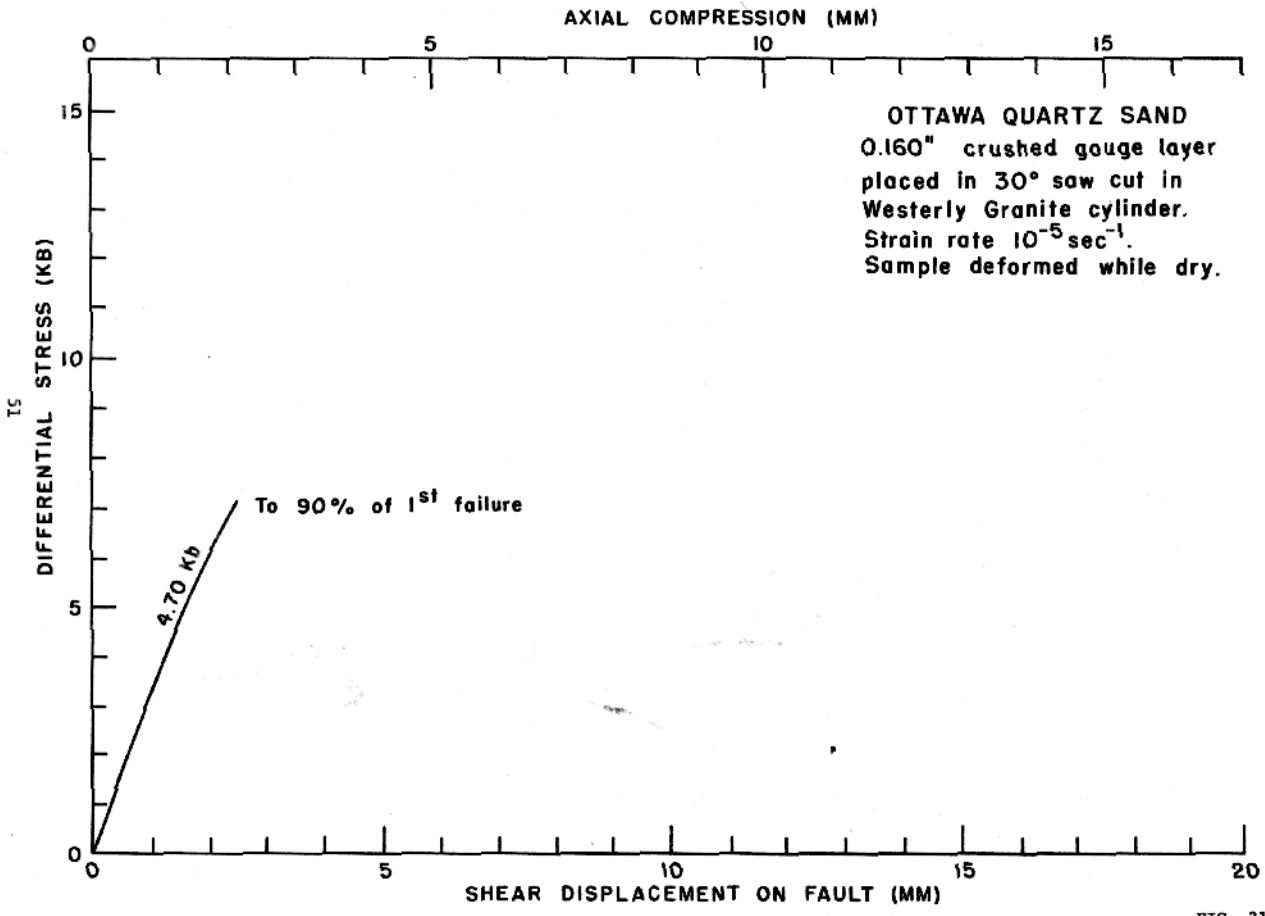


FIG. 31

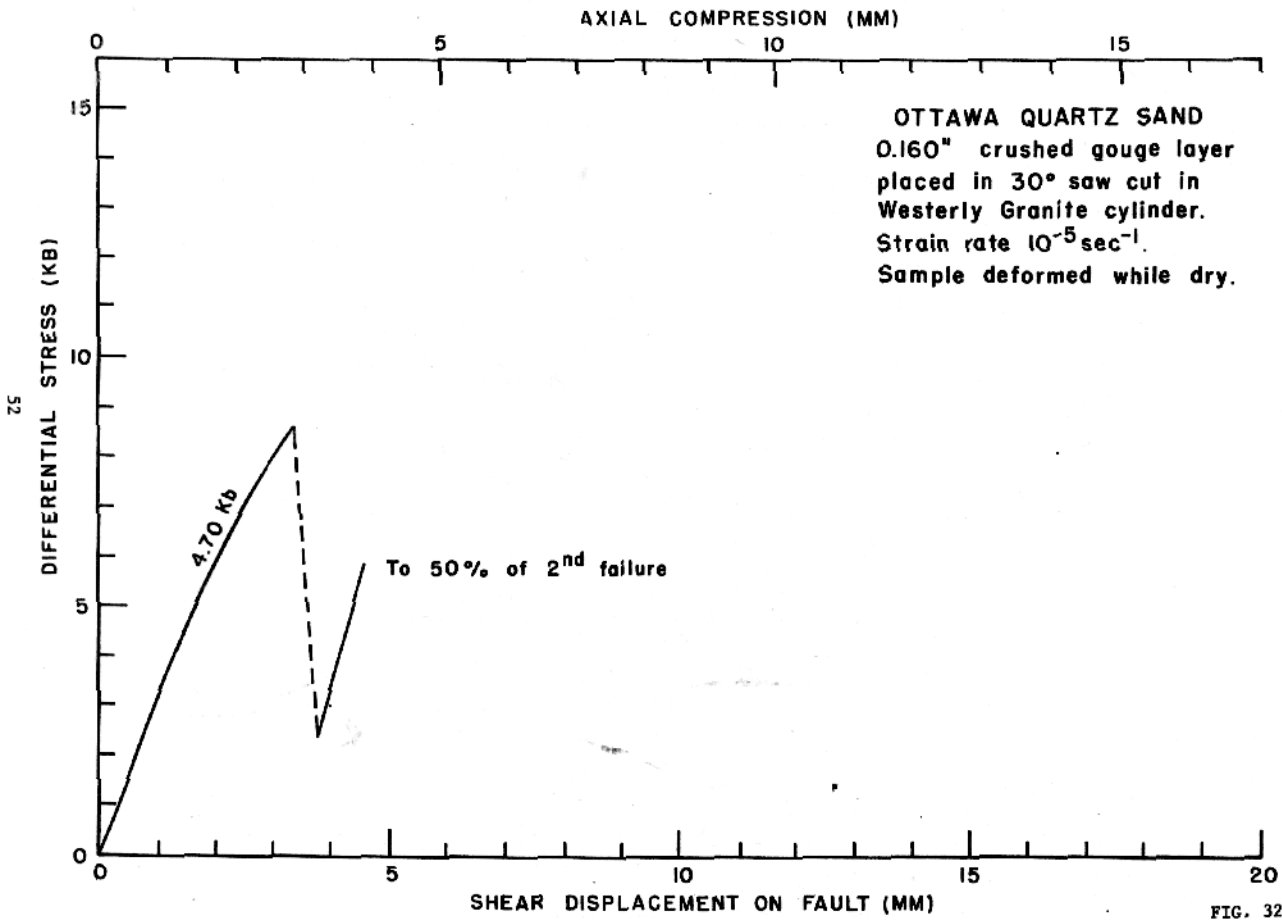


FIG. 32

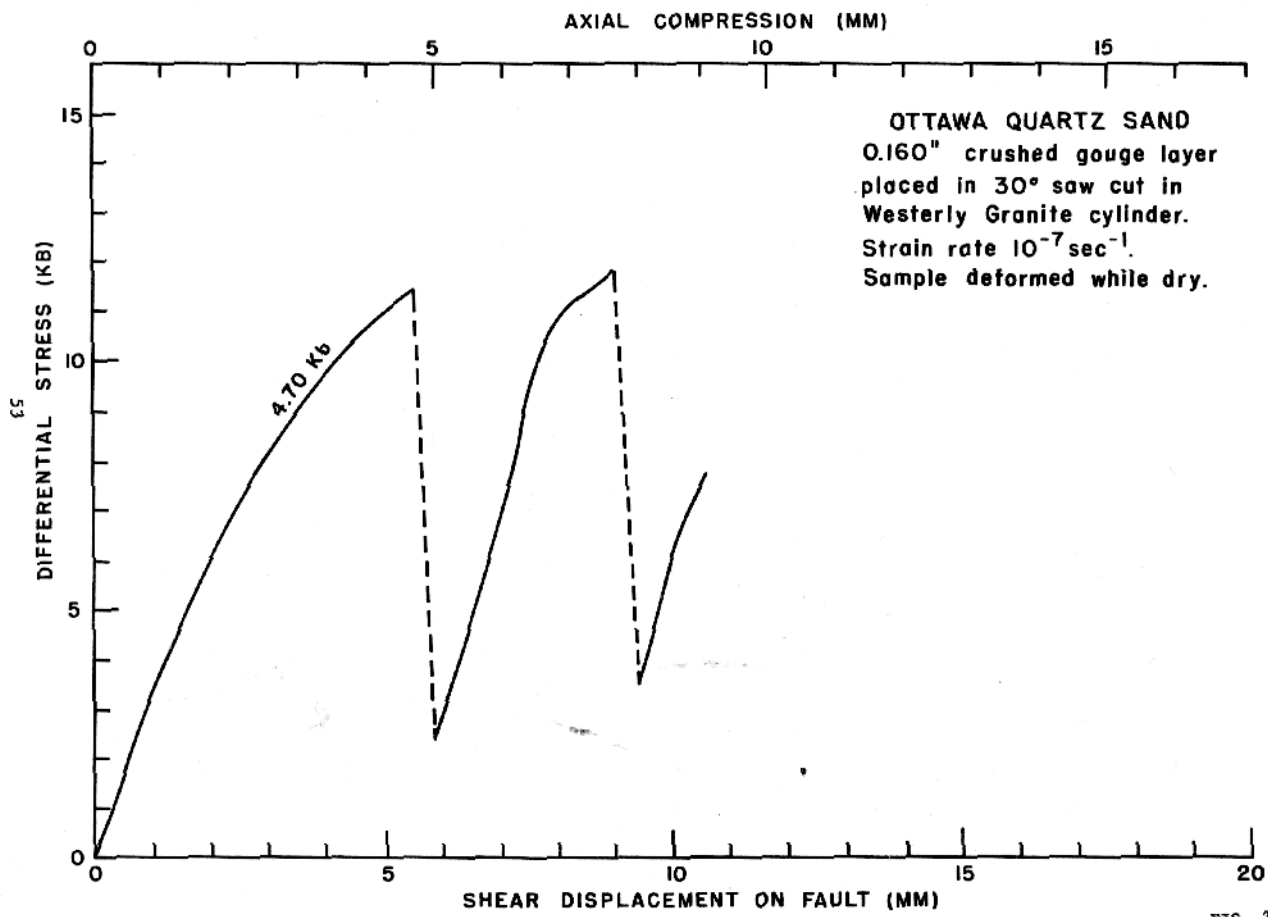


FIG. 33

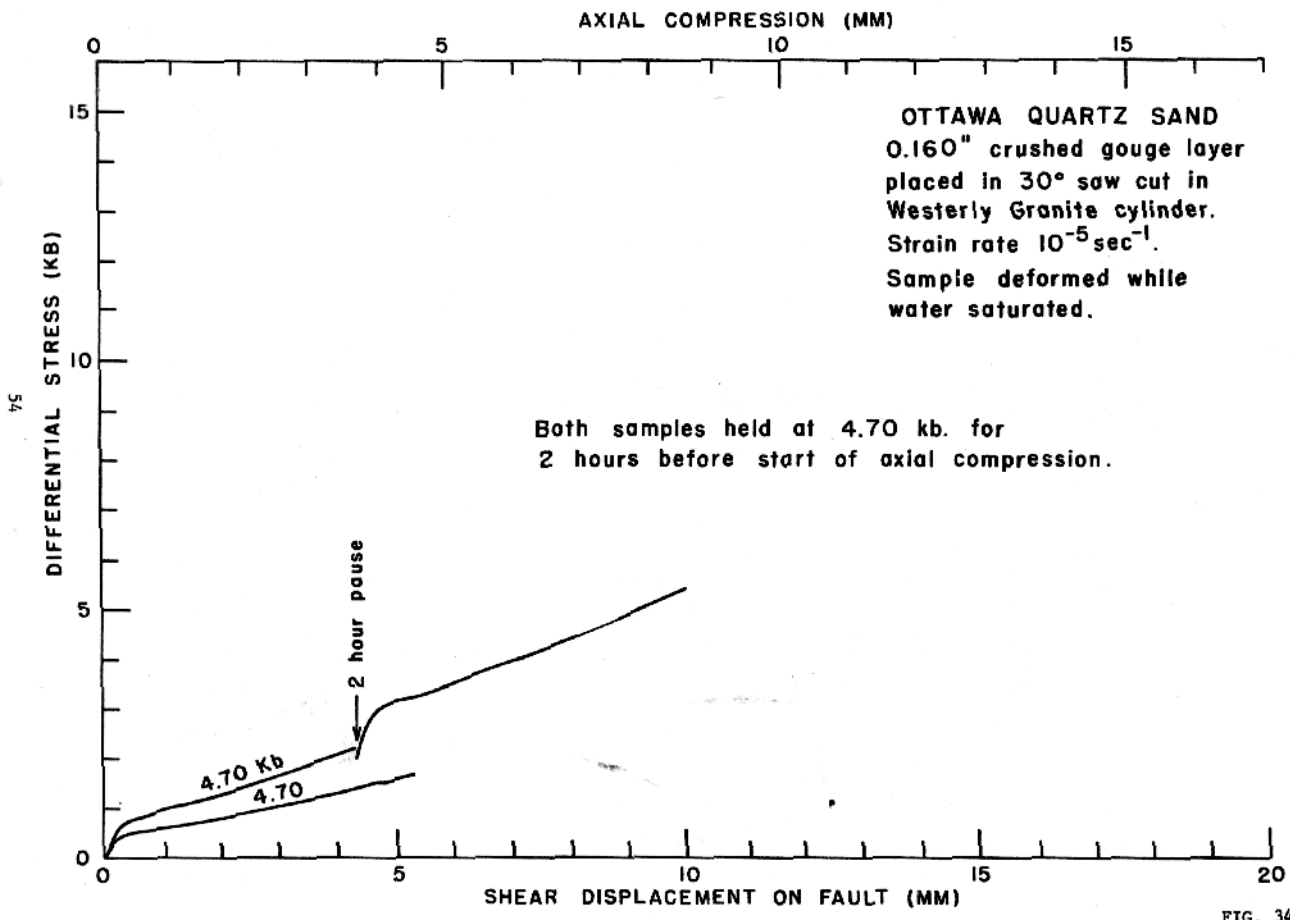


FIG. 34

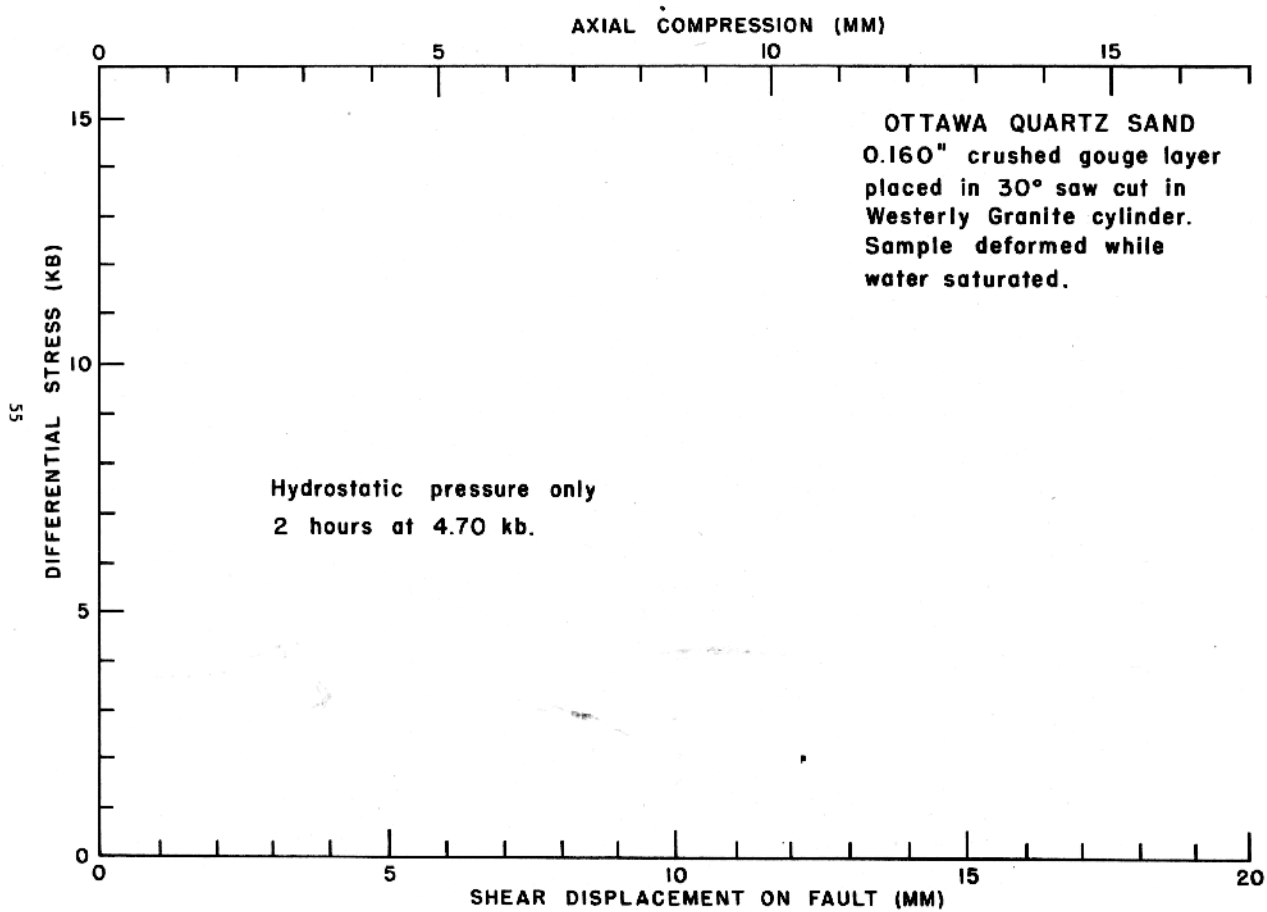


FIG. 35





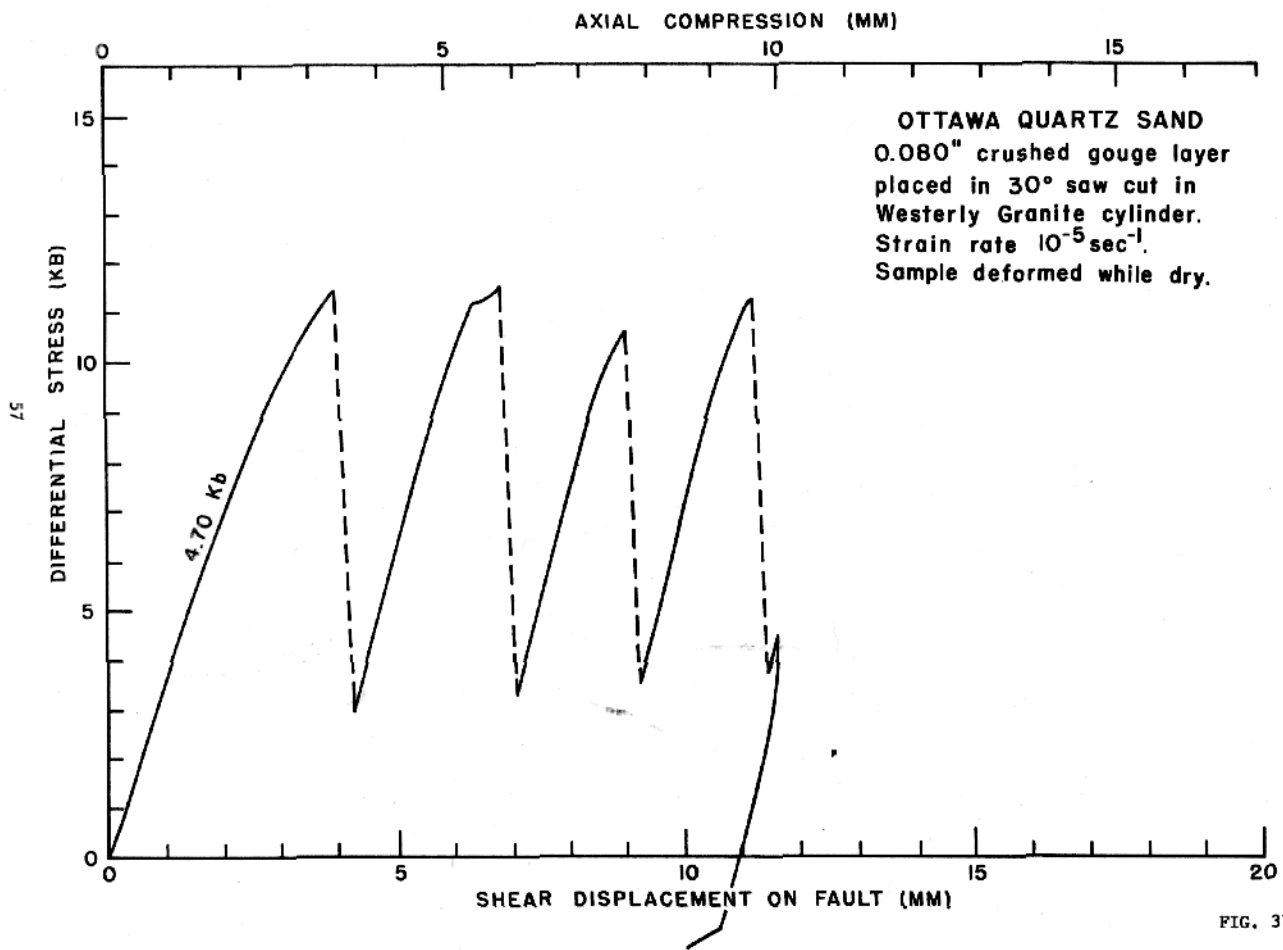


FIG. 37

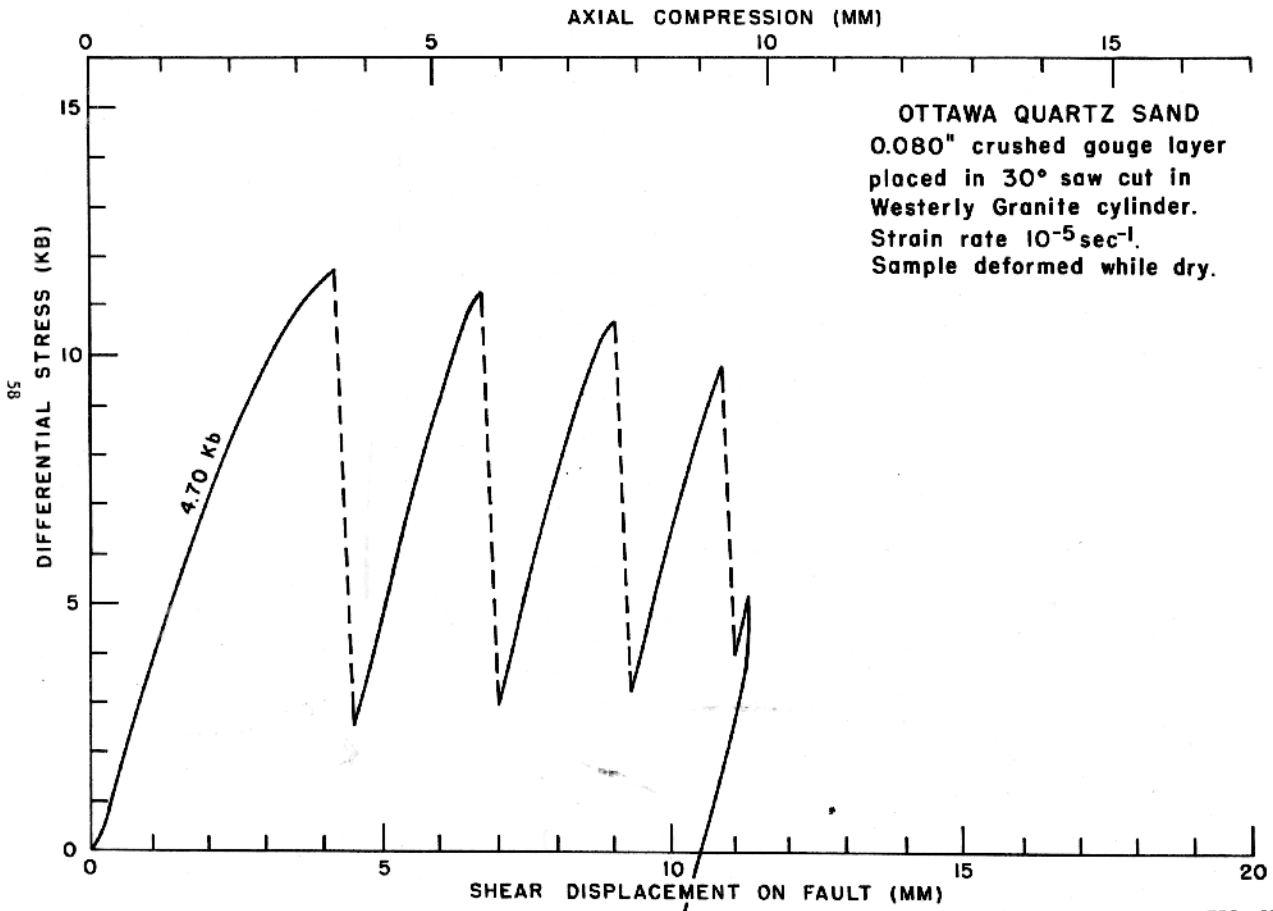


FIG. 38

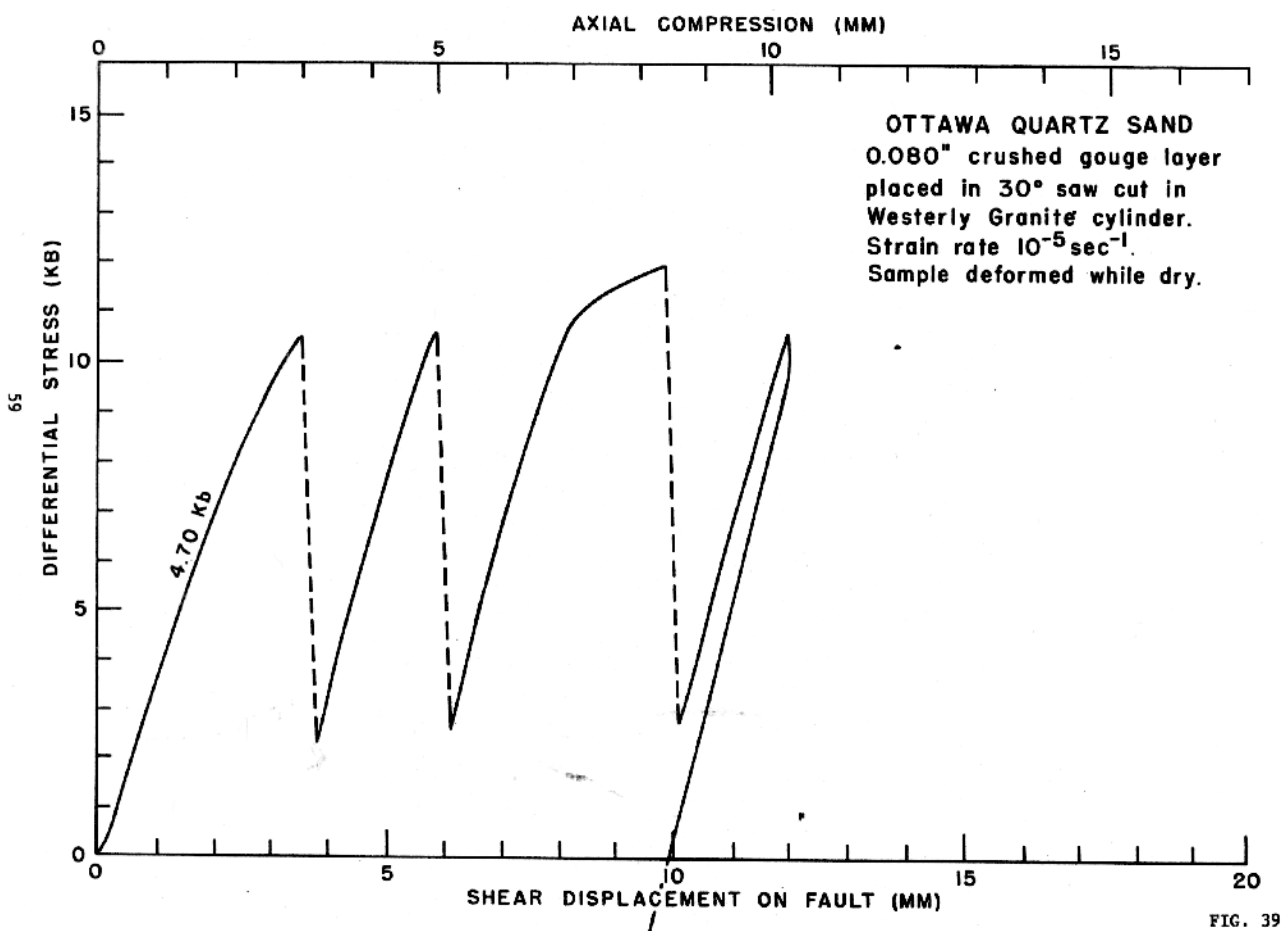
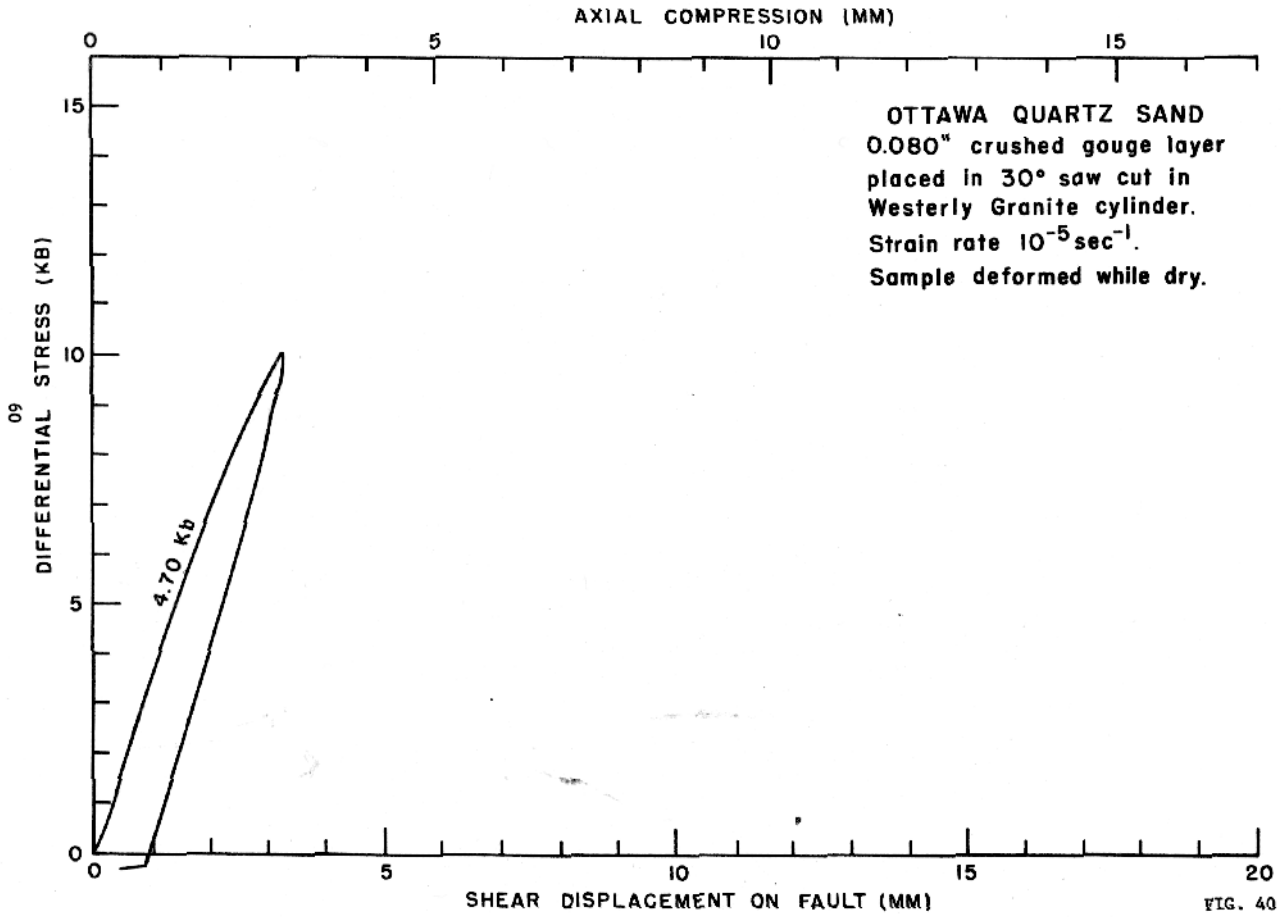


FIG. 39



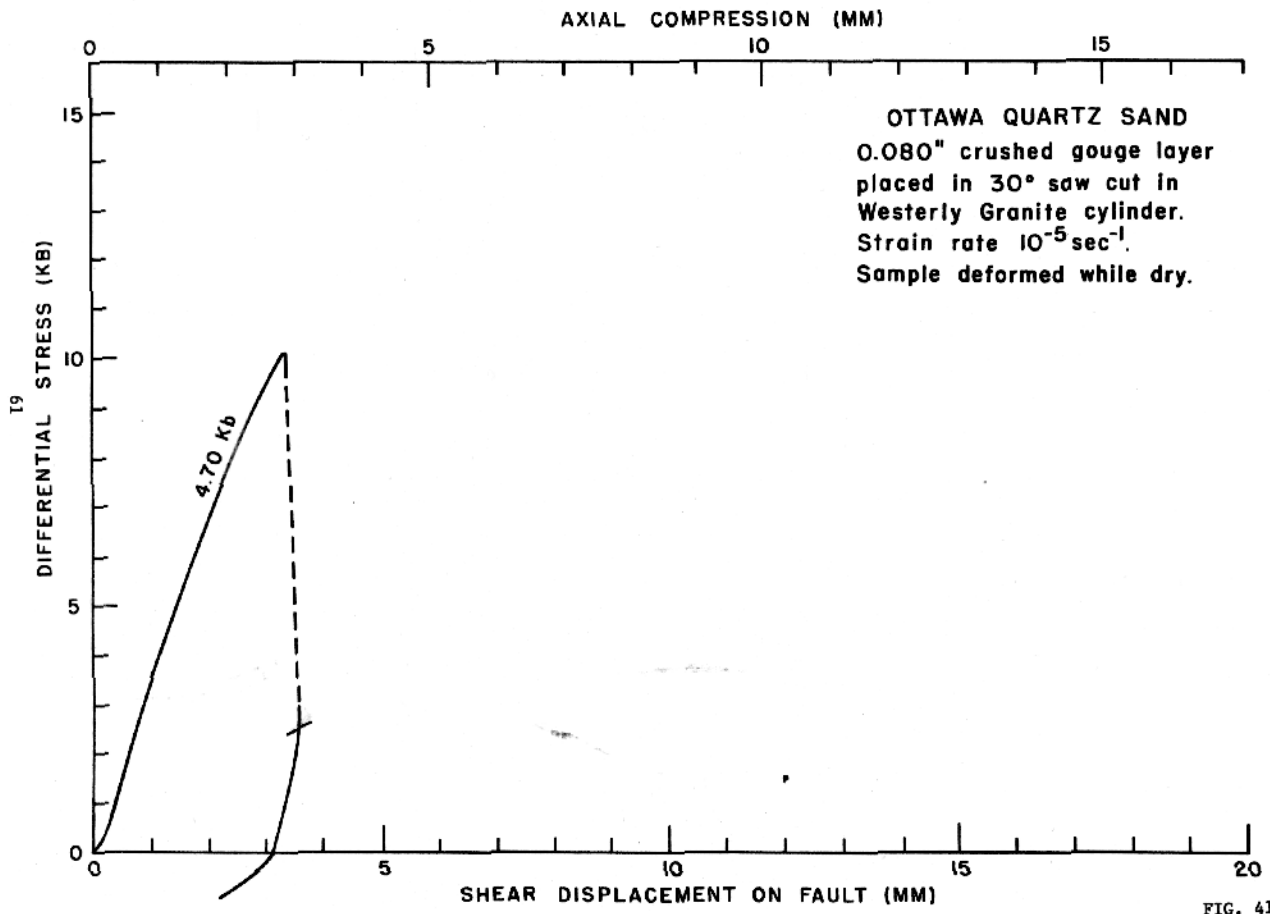


FIG. 41

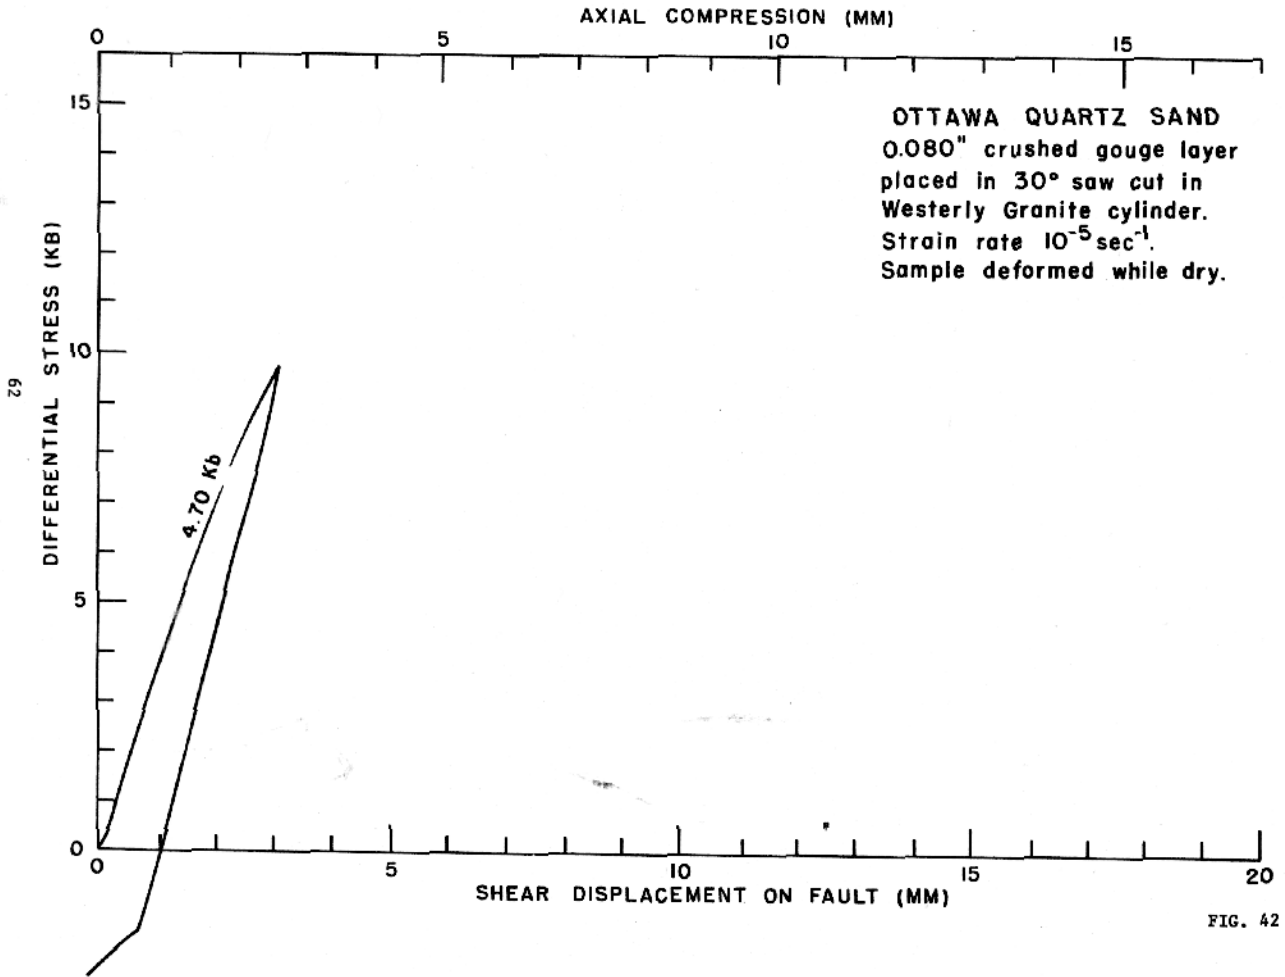


FIG. 42


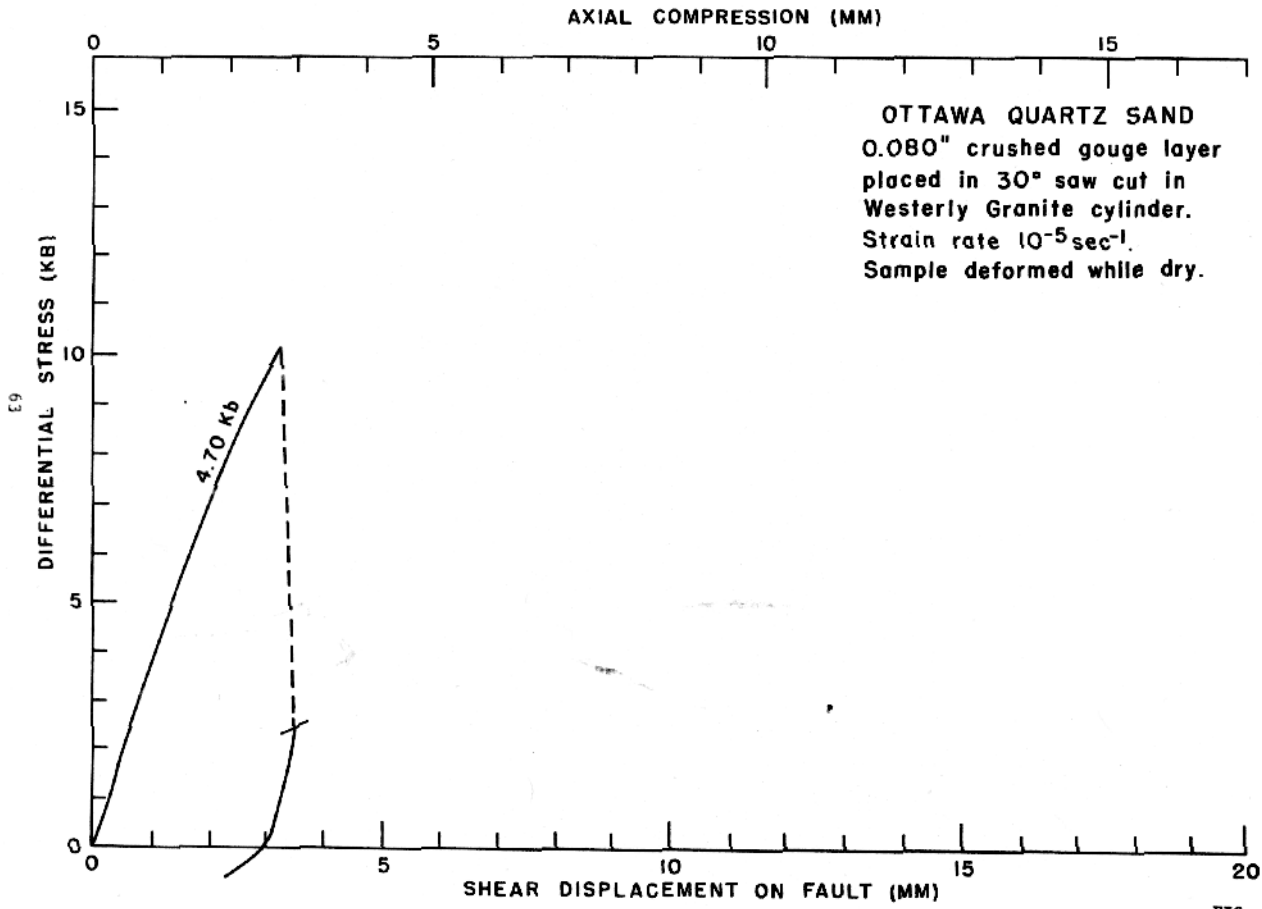


FIG. 43

AXIAL COMPRESSION (MM)

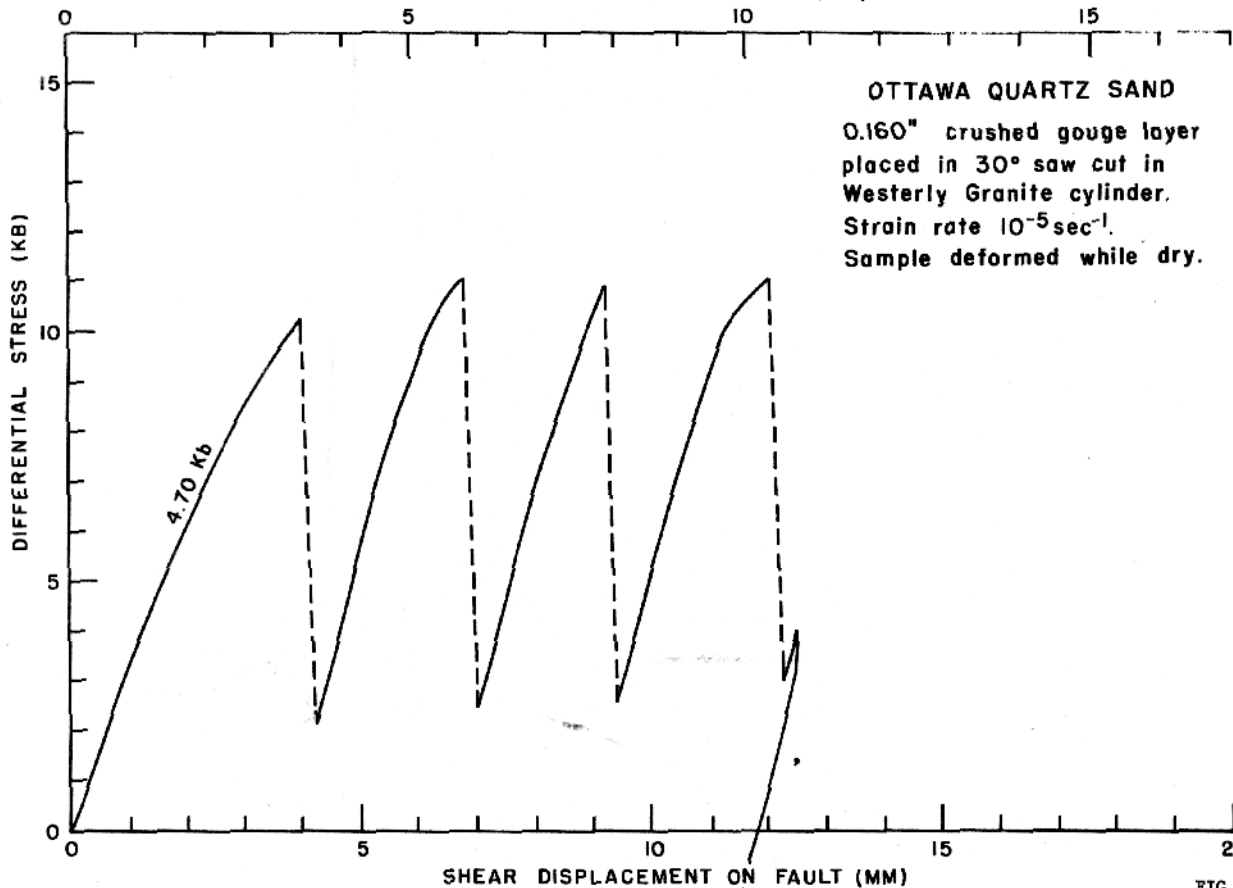

OTTAWA QUARTZ SAND  
0.160" crushed gouge layer  
placed in 30° saw cut in  
Westerly Granite cylinder.  
Strain rate  $10^{-5} \text{sec}^{-1}$ .  
Sample deformed while dry.

79

FIG. 44





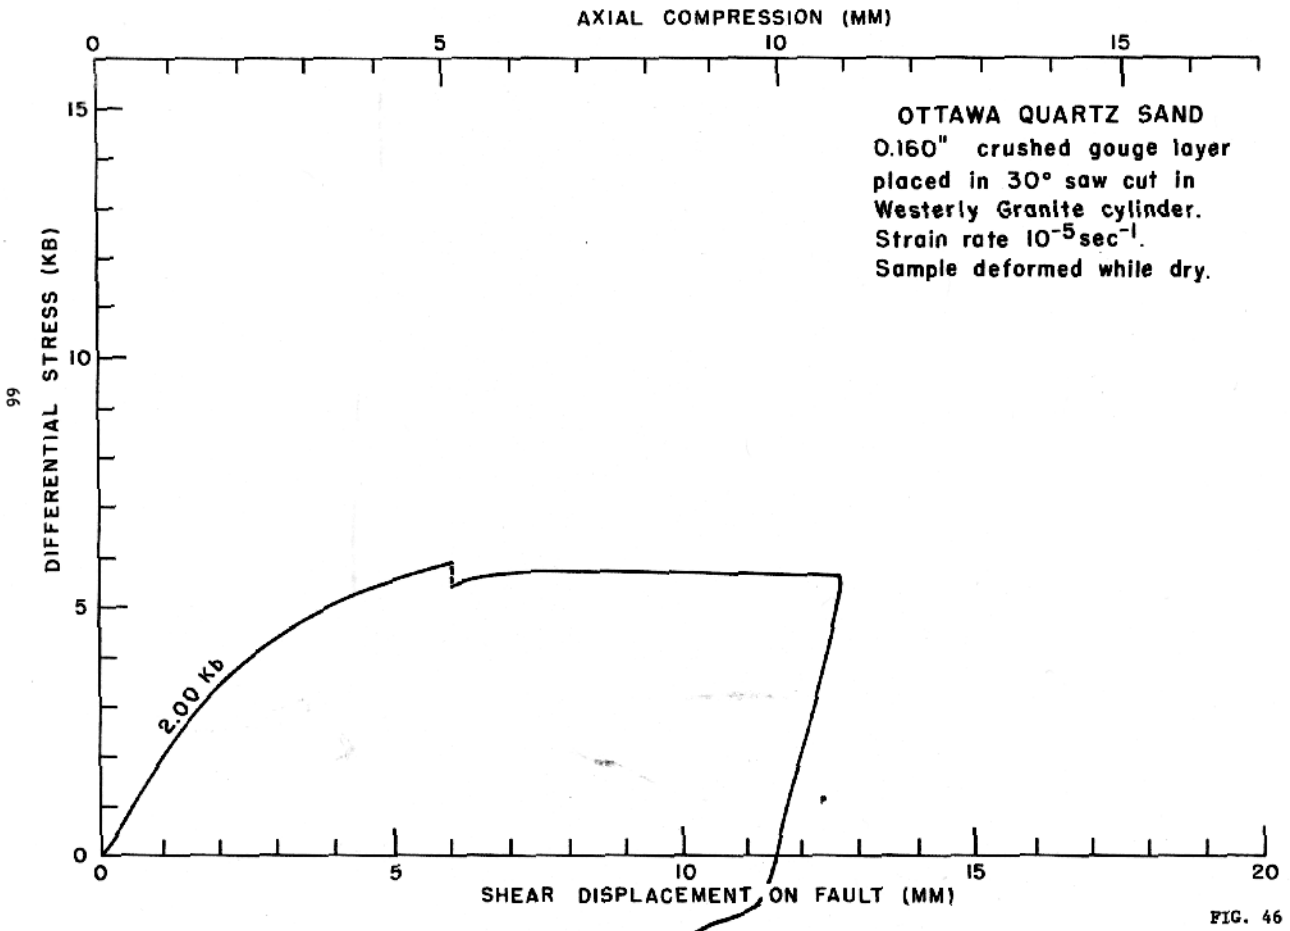


FIG. 46



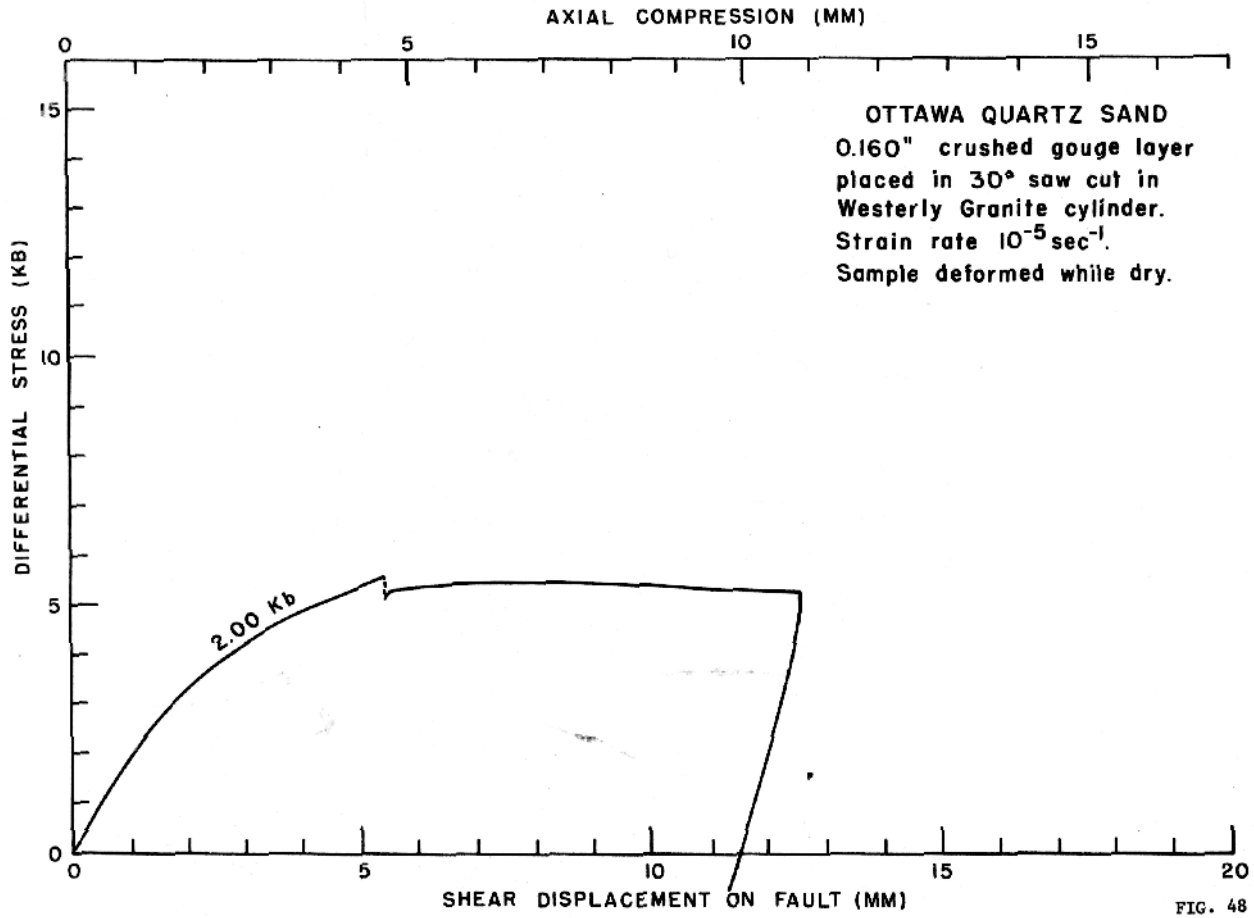


FIG. 48

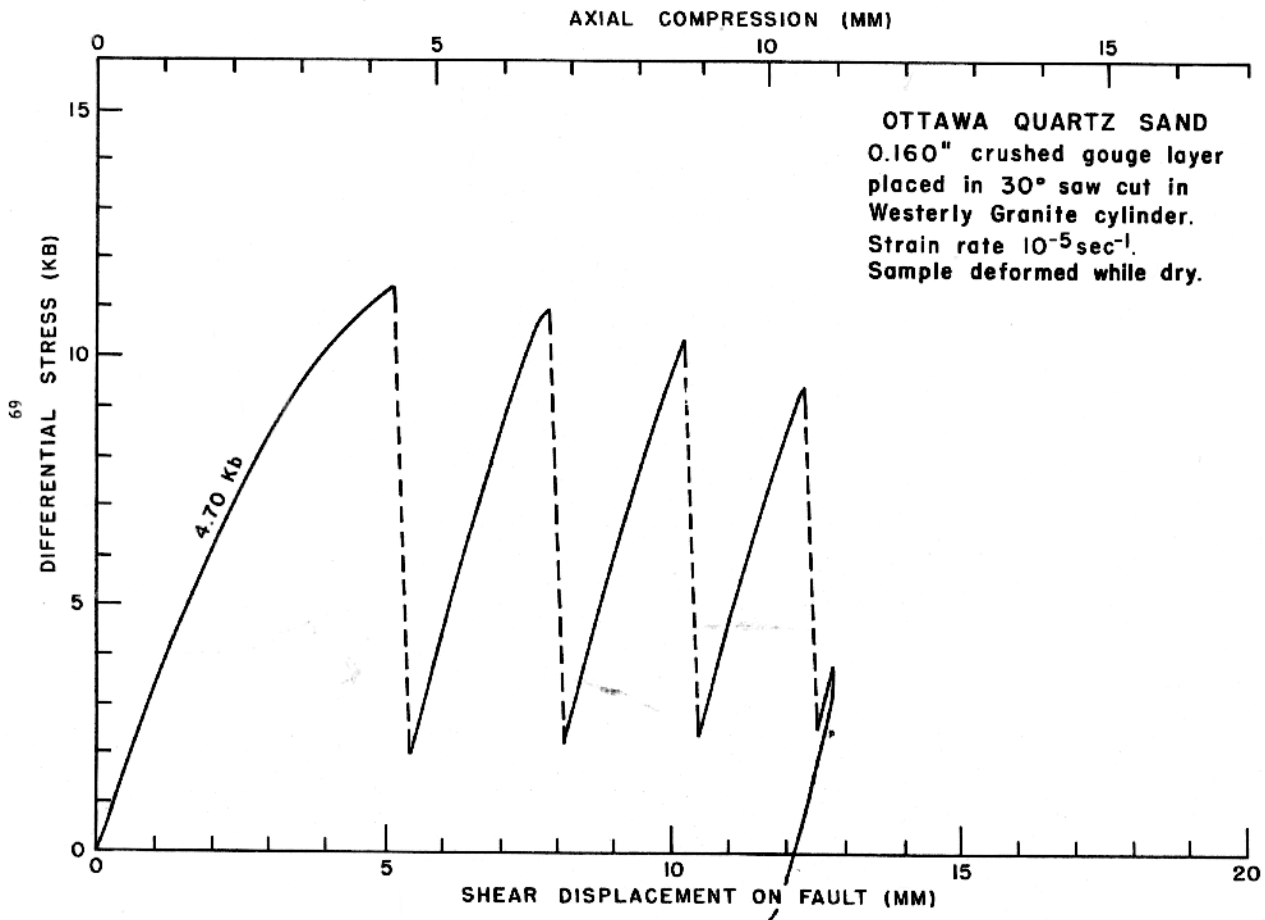


FIG. 49


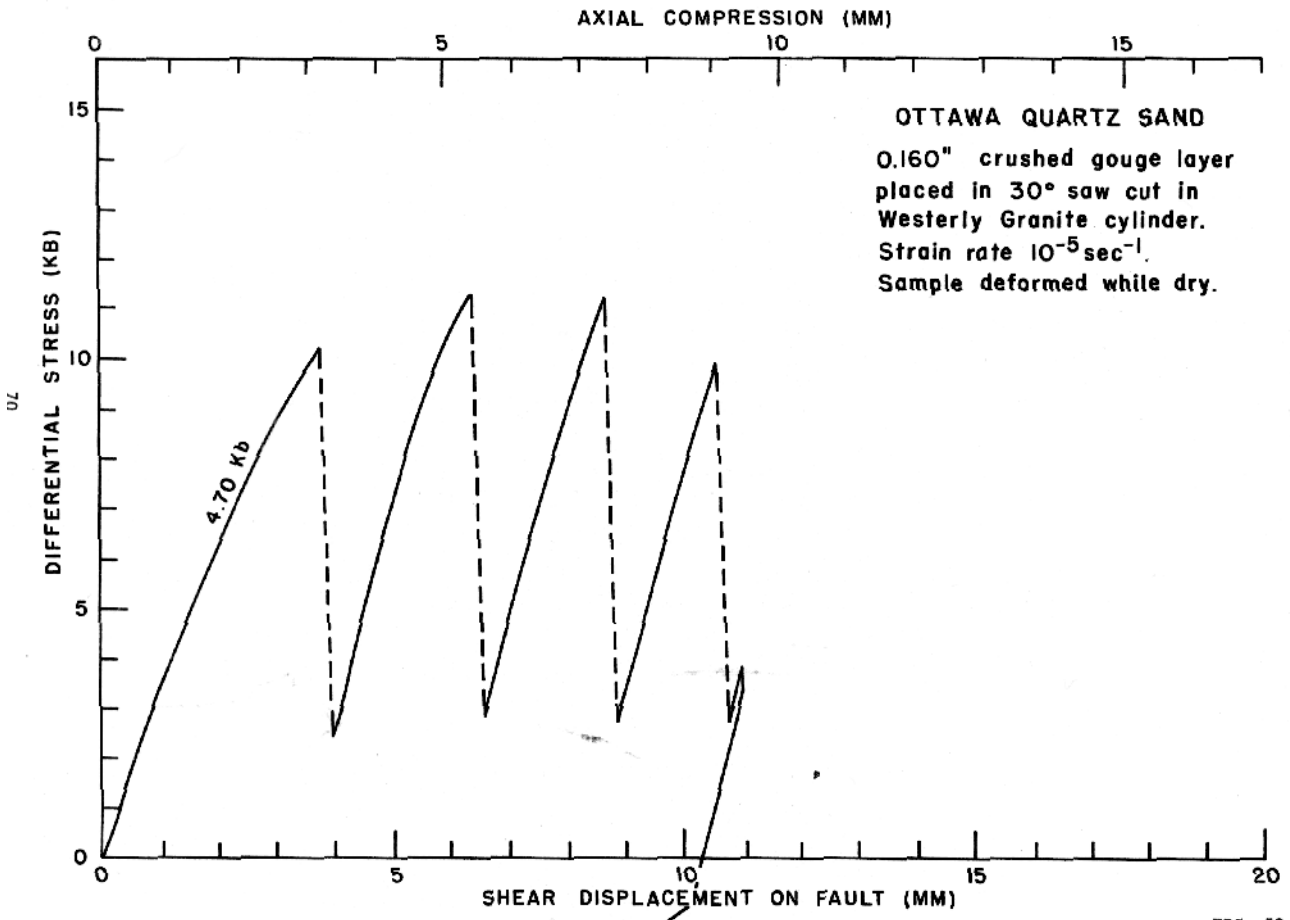


FIG. 50

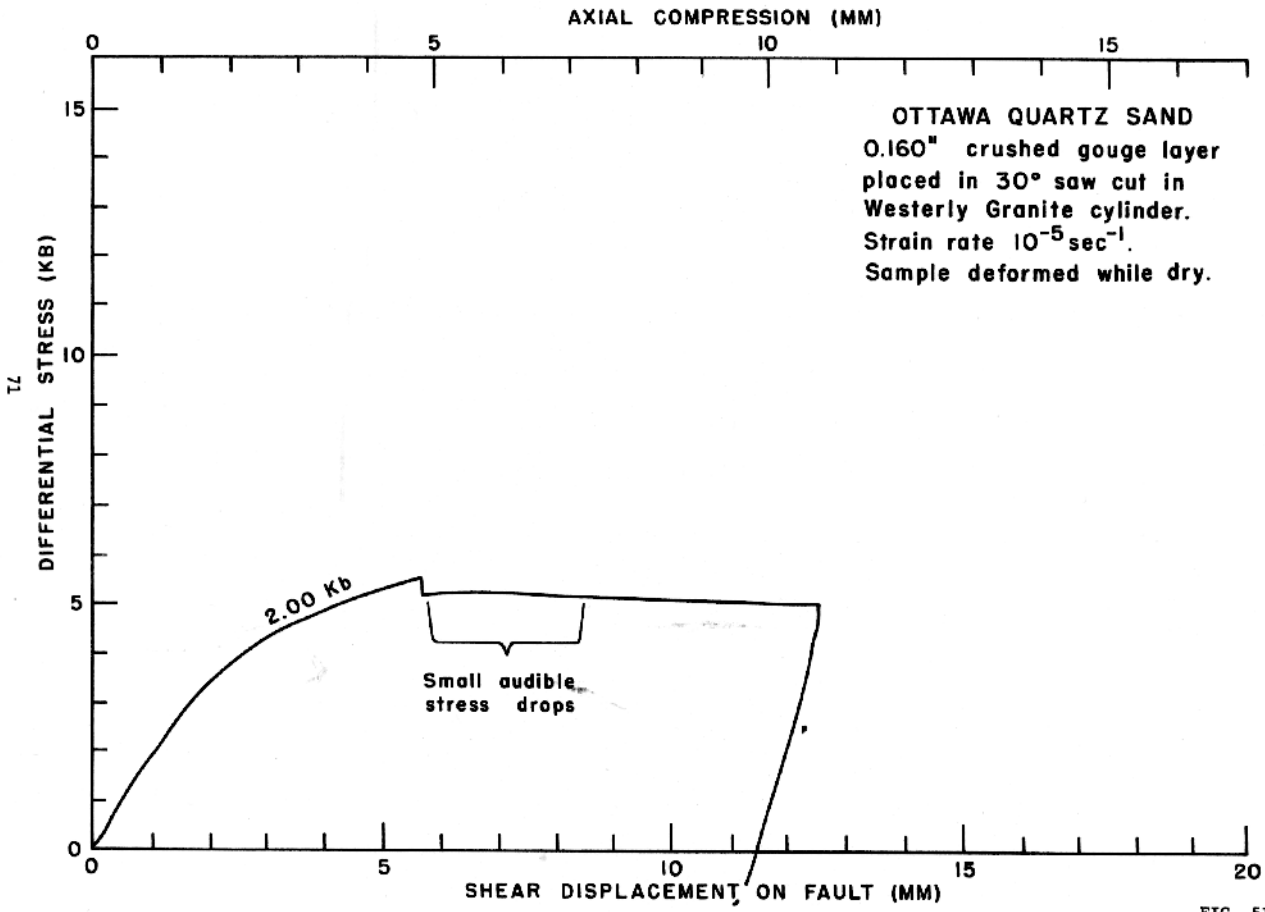

OTTAWA QUARTZ SAND  
0.160" crushed gouge layer  
placed in 30° saw cut in  
Westerly Granite cylinder.  
Strain rate  $10^{-5} \text{ sec}^{-1}$ .  
Sample deformed while dry.

FIG. 51

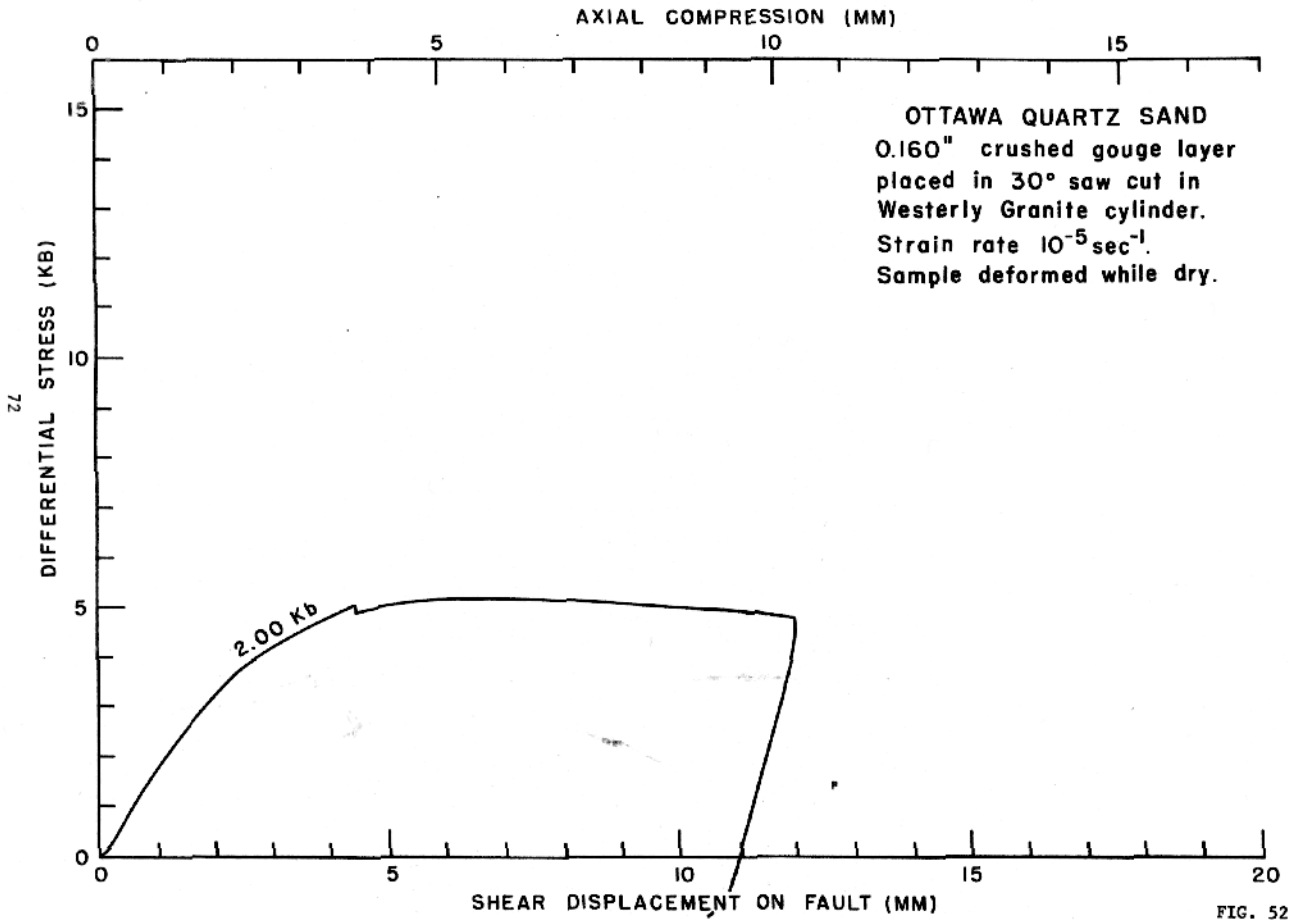


FIG. 52



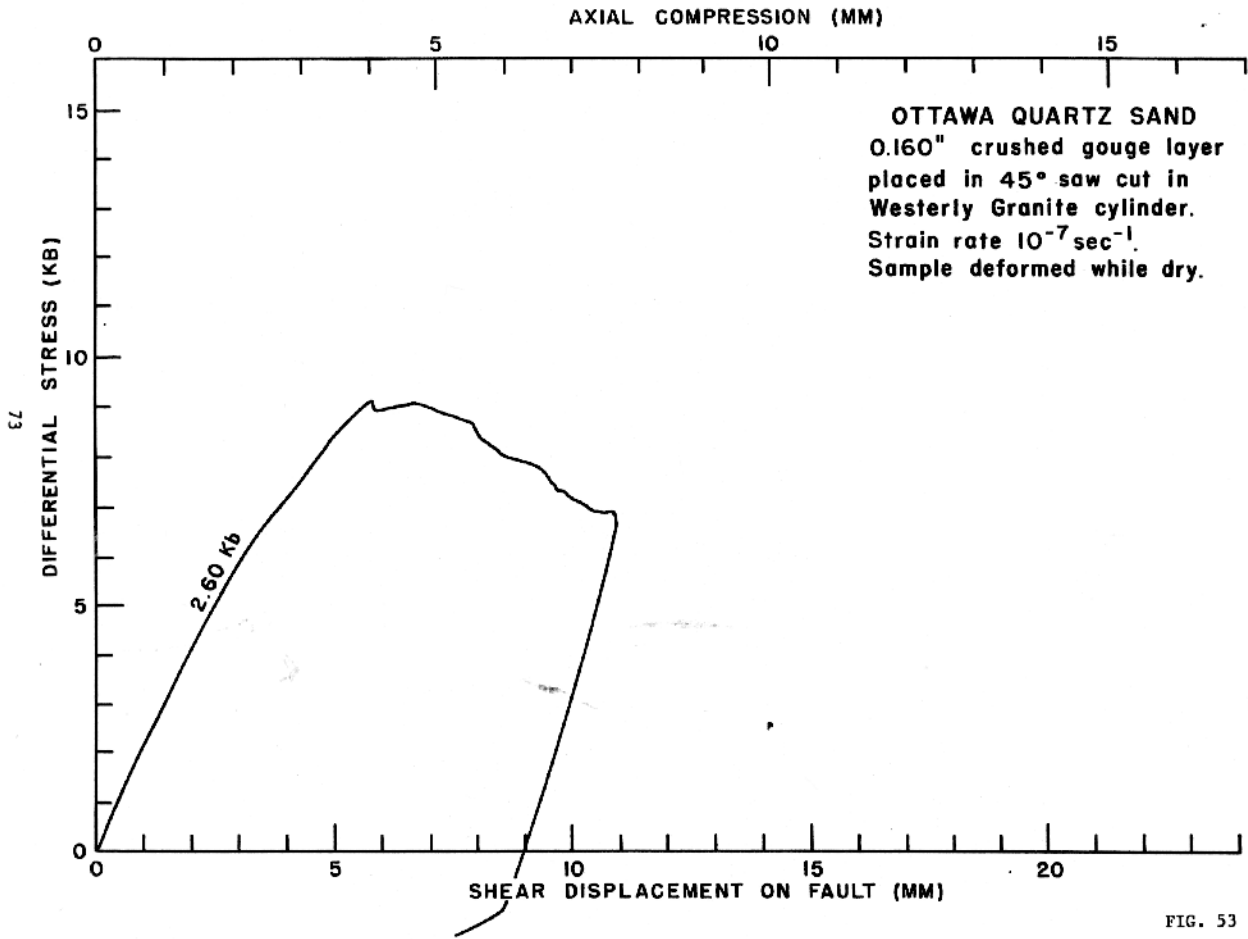


FIG. 53

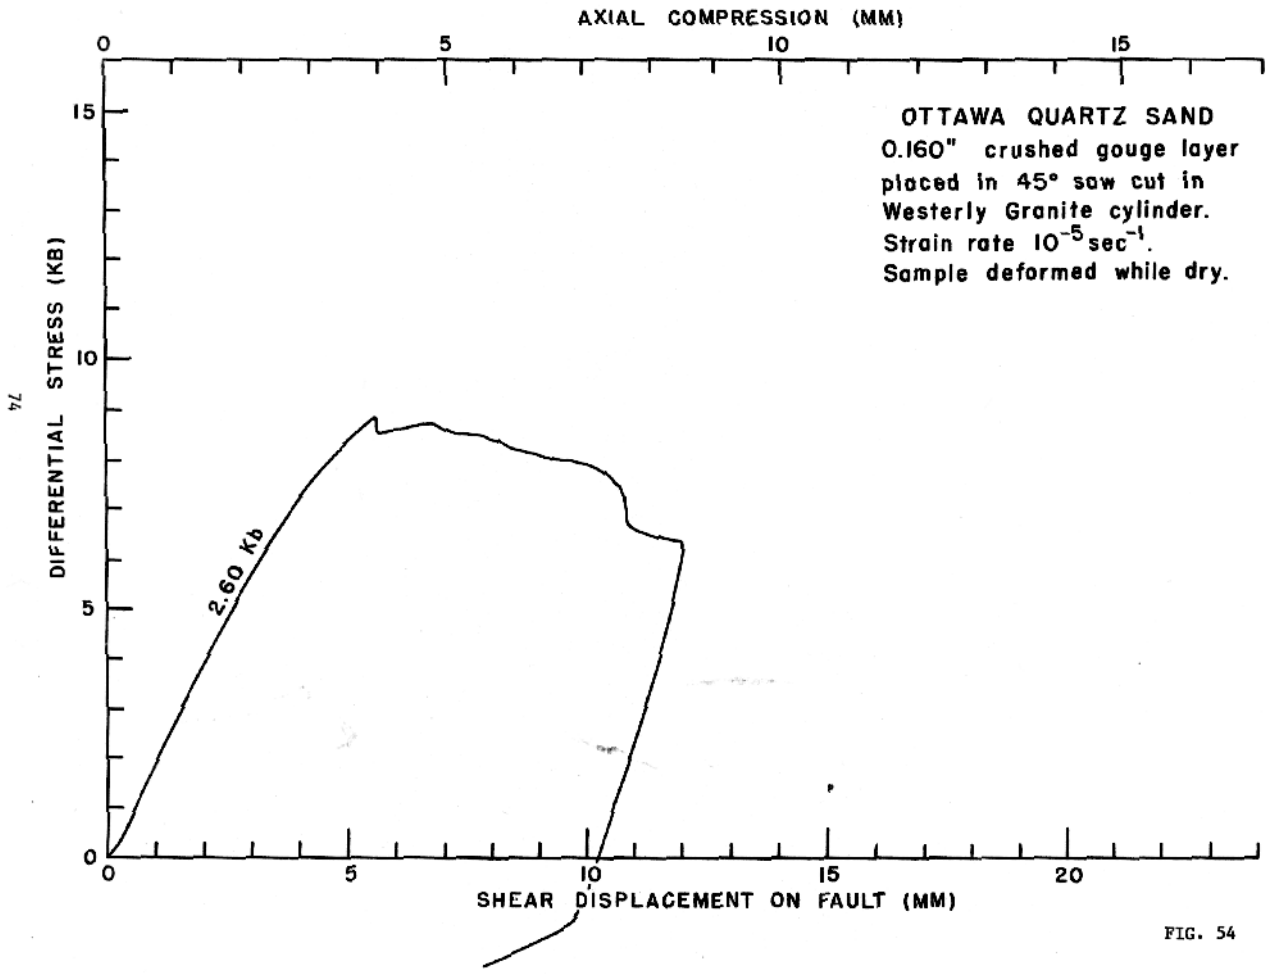


FIG. 54

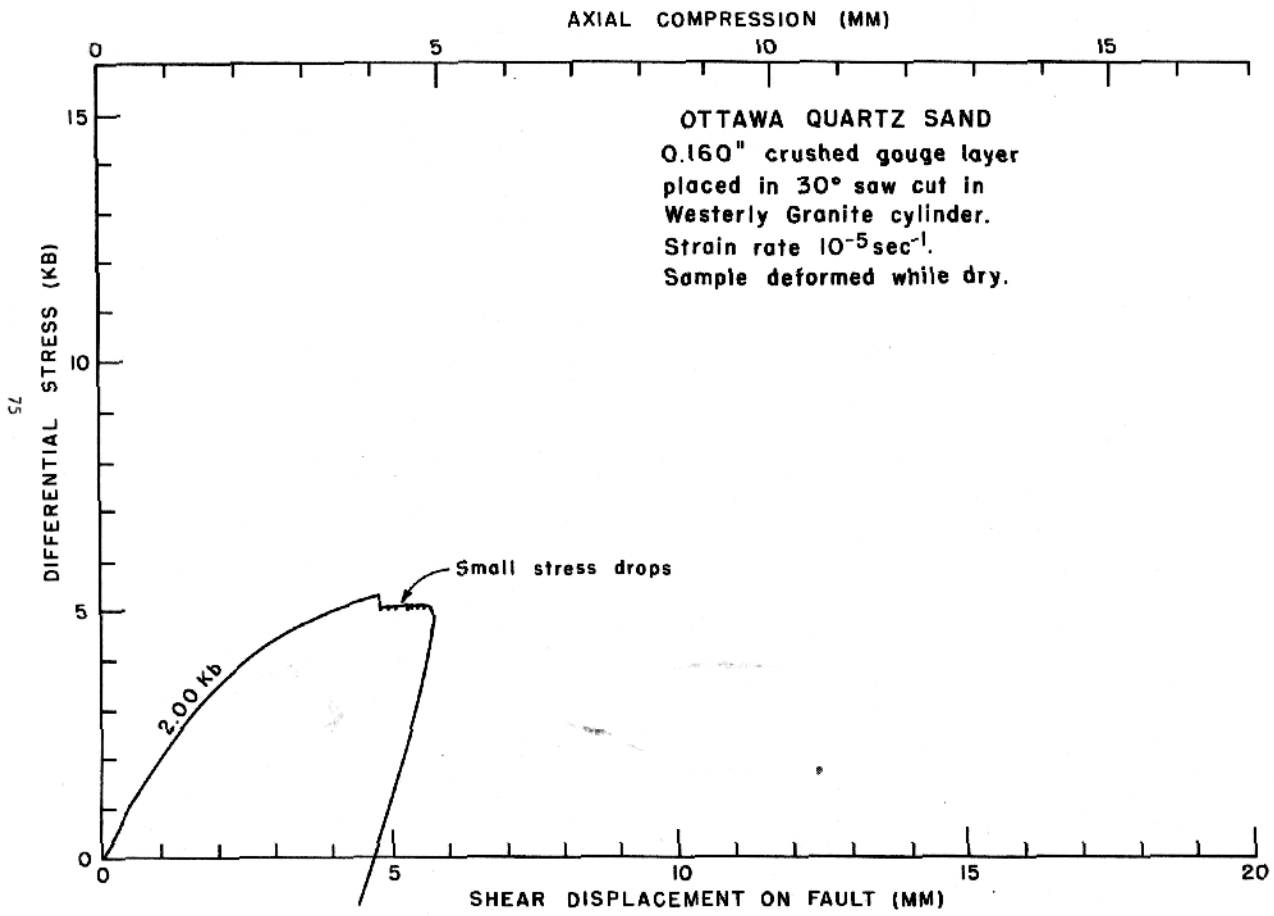


FIG. 55

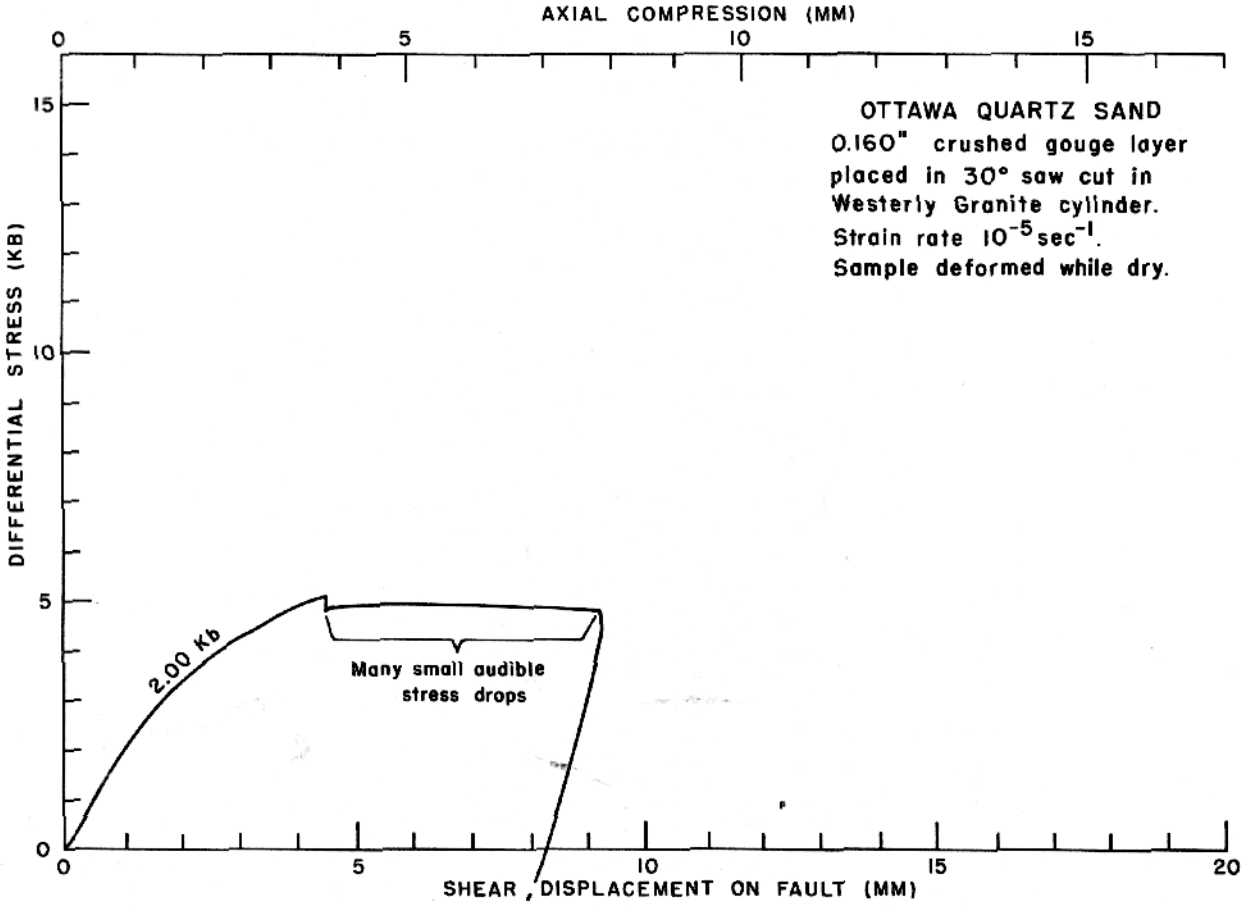


FIG. 56

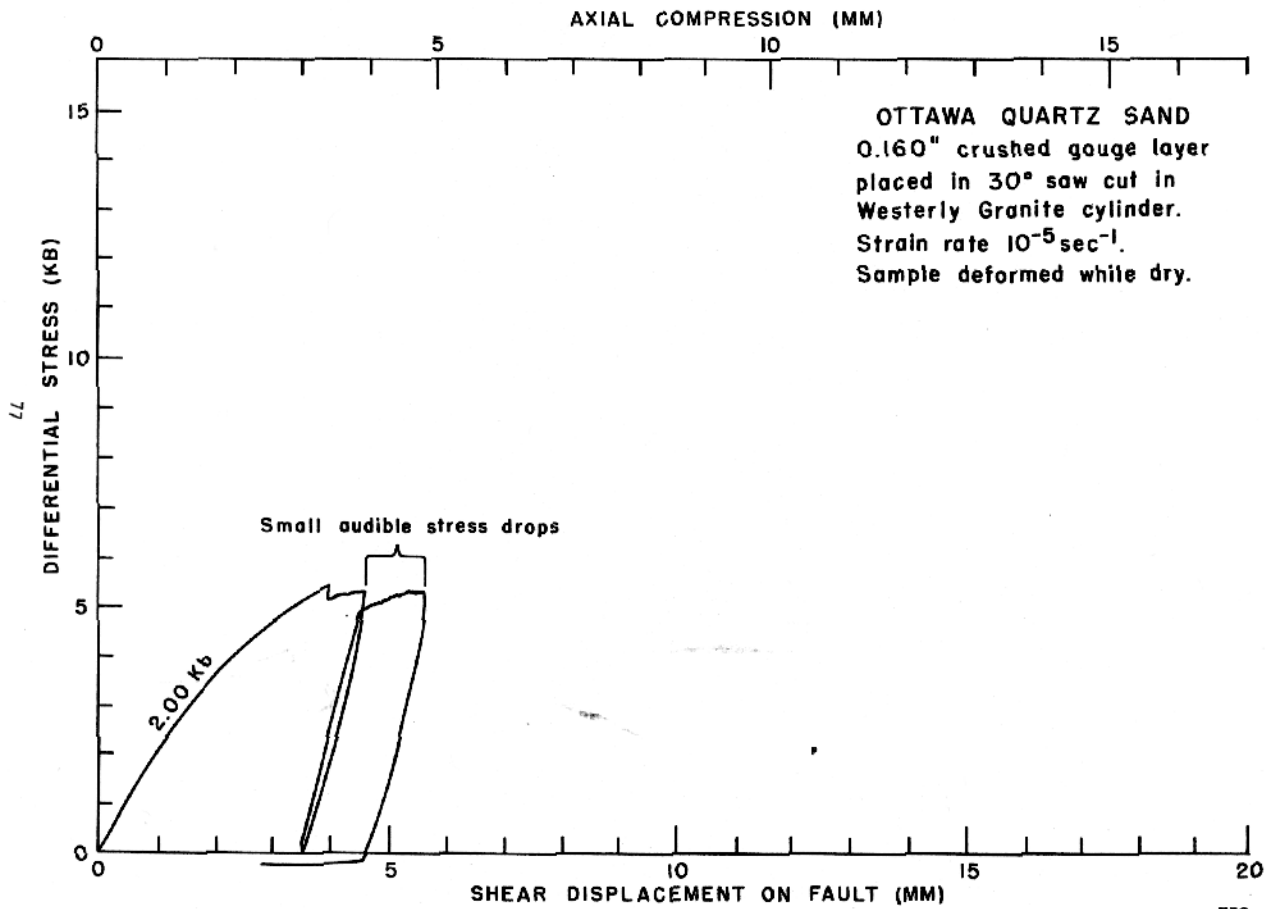


FIG. 57

## Serpentinite

- Fig. 58,59) Crushed antigorite serpentinite from New Alamden, Ca.  
0.025"-thick layer with initial grain sizes that pass a  
170 mesh sieve, placed in a 30° sawcut in a 1" x 2.5" of  
Westerly Granite cylinder  
Confining pressures: 0.73 to 6.26 kb  
Axial Compression strain rate:  $10^{-4} \text{sec}^{-1}$
- 60,61) 0.020"-thick wafer of serpentinitized harzbergite from Del  
Puerto Canyon, Ca, placed in a 30° sawcut in a 1" x 2.5"  
cylinder of Westerly Granite  
Confining pressures: 0.73 to 6.23 kb  
Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$
- 62,63) 0.025"-thick wafer of serpentinitized harzbergite from Del  
Puerto Canyon, CA., placed in a 30° sawcut in a 1" x 2.5"  
cylinder of Westerly Granite  
Confining pressures: 0.73 to 6.23 kb  
Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$
- 64,65) Crushed serpentinitized harzbergite from Del Puerto Canyon,  
Ca. 0.025"-thick layer with initial grain sizes that pass  
a 170 mesh sieve, placed in a 30° sawcut in a 1" x 2.5"  
cylinder of Westerly Granite  
Confining pressures: 0.73 to 6.25 kb  
Axial compression strain rate:  $10^{-4} \text{sec}^{-1}$

### Comments:

The antigorite collected from a sheared zone near New Alamden was  
collected as fragments up to several centimeters across and crushed to pass

a 170 mesh sieve ( $\leq 0.090$  mm grain size). The crushed grains were packed onto the saw cut face wet and dried after the samples were assembled.

The serpentinitized harzbergite collected from Del Puerto Canyon was massive, and was both cored for cutting 0.025" wafers and used as crushed grains ( $\leq 0.090$  mm).

In all cases surprisingly high stress levels were supported, and frequent violent stick slip events occurred at high confining pressures.

The samples using the 0.025" intact wafers or layers of crushed Del Puerto serpentinite gave similar results.

The 0.200" intact wafers of Del Puerto serpentinite consistently showed a more distinct yield point than the 0.025" samples of the same type material.

All but two of the Del Puerto samples produced stick slip at 1 1/2 kb. All Del Puerto samples run at 3/4 kb were stable except for one that had a single stick slip event.

The Almaden serpentinite samples were stable at 0.73 and 1.53 kb but were unstable at 3.11 kb and above.

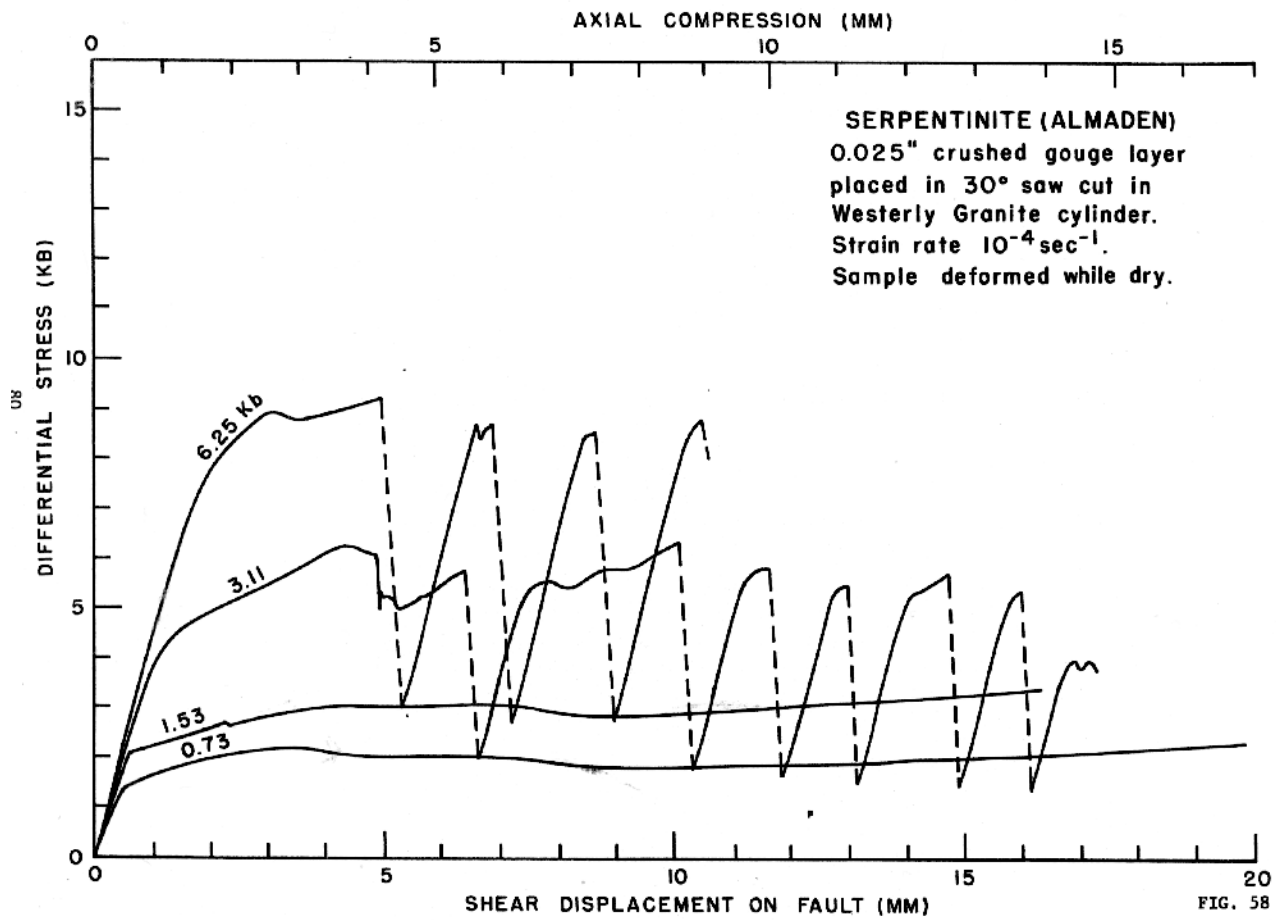
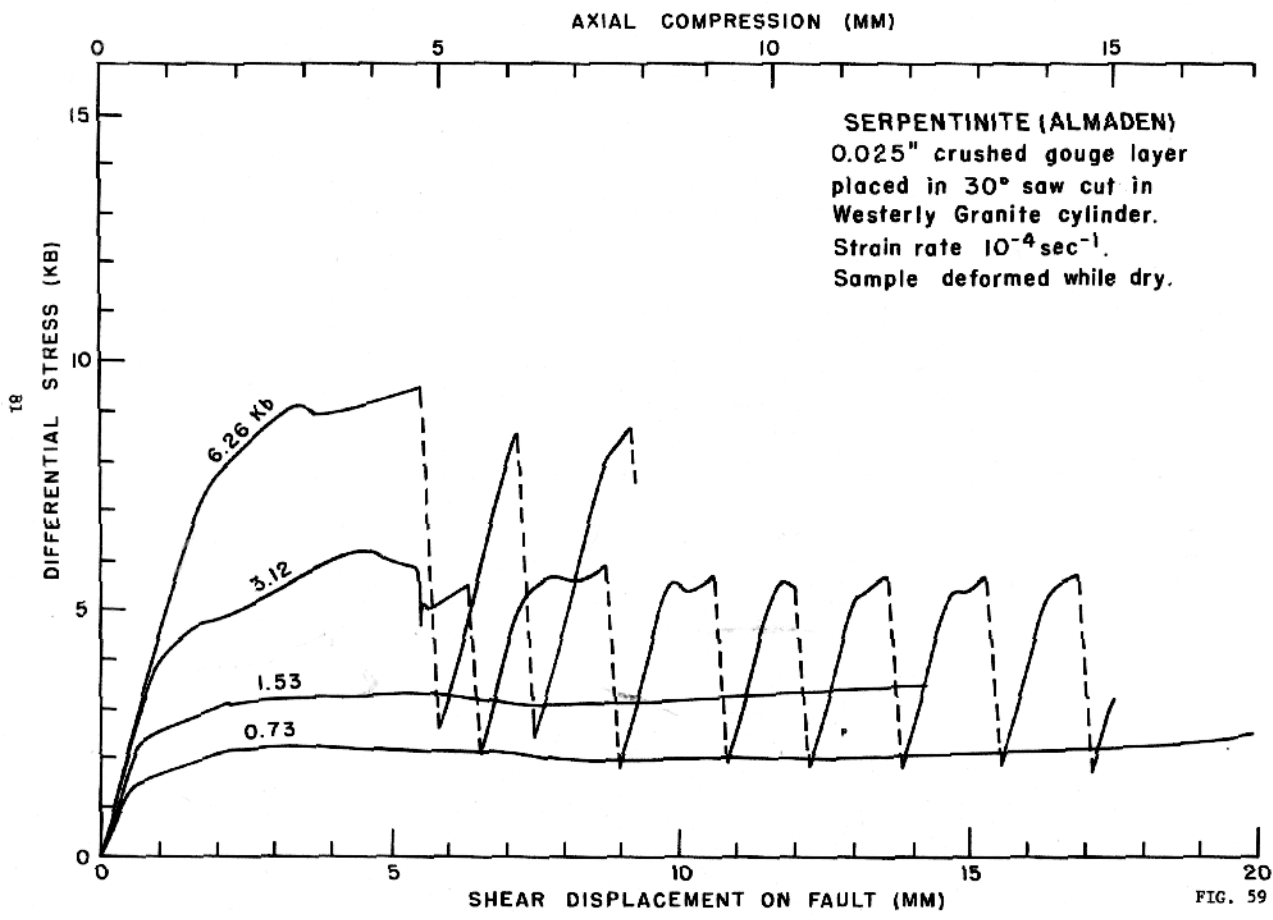


FIG. 58





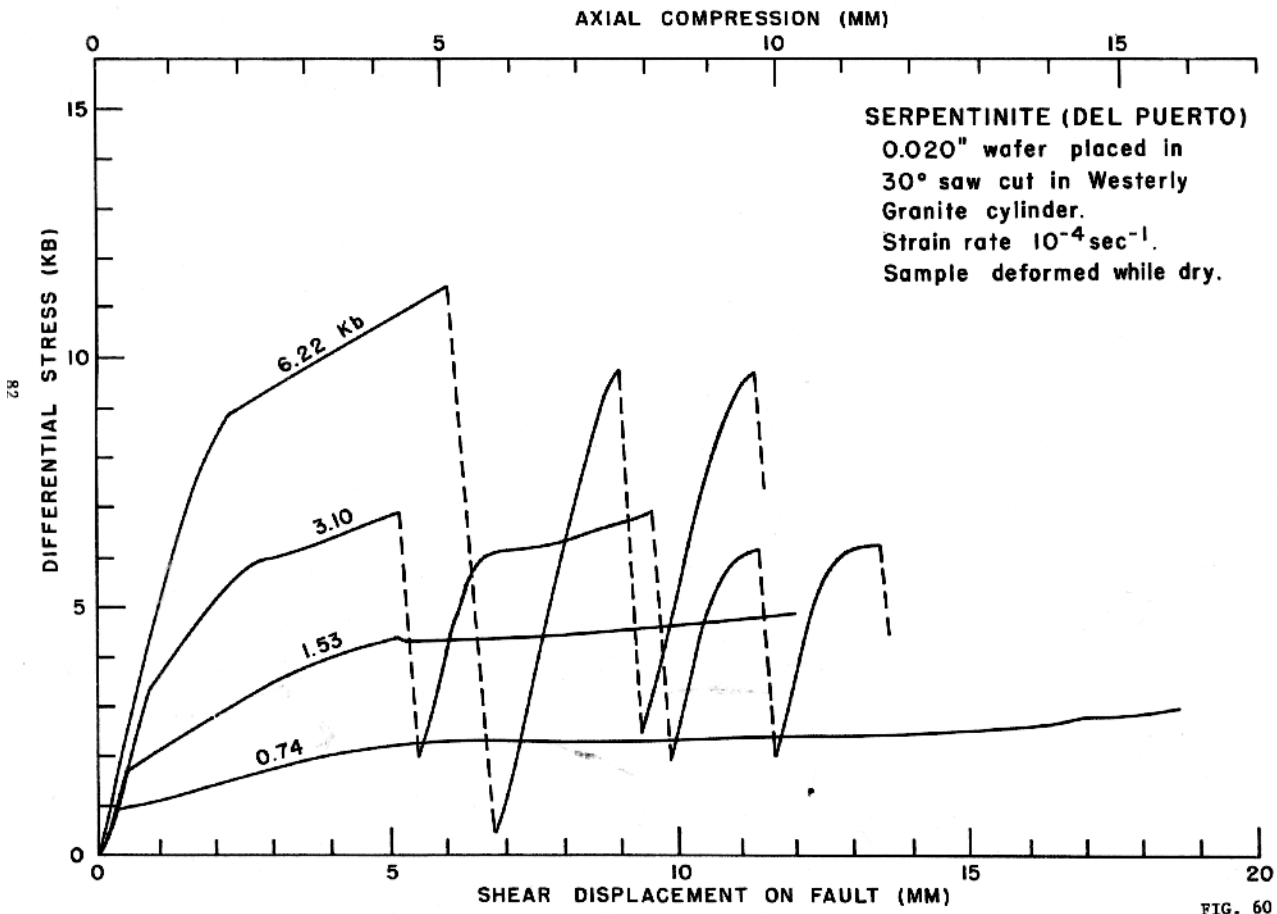
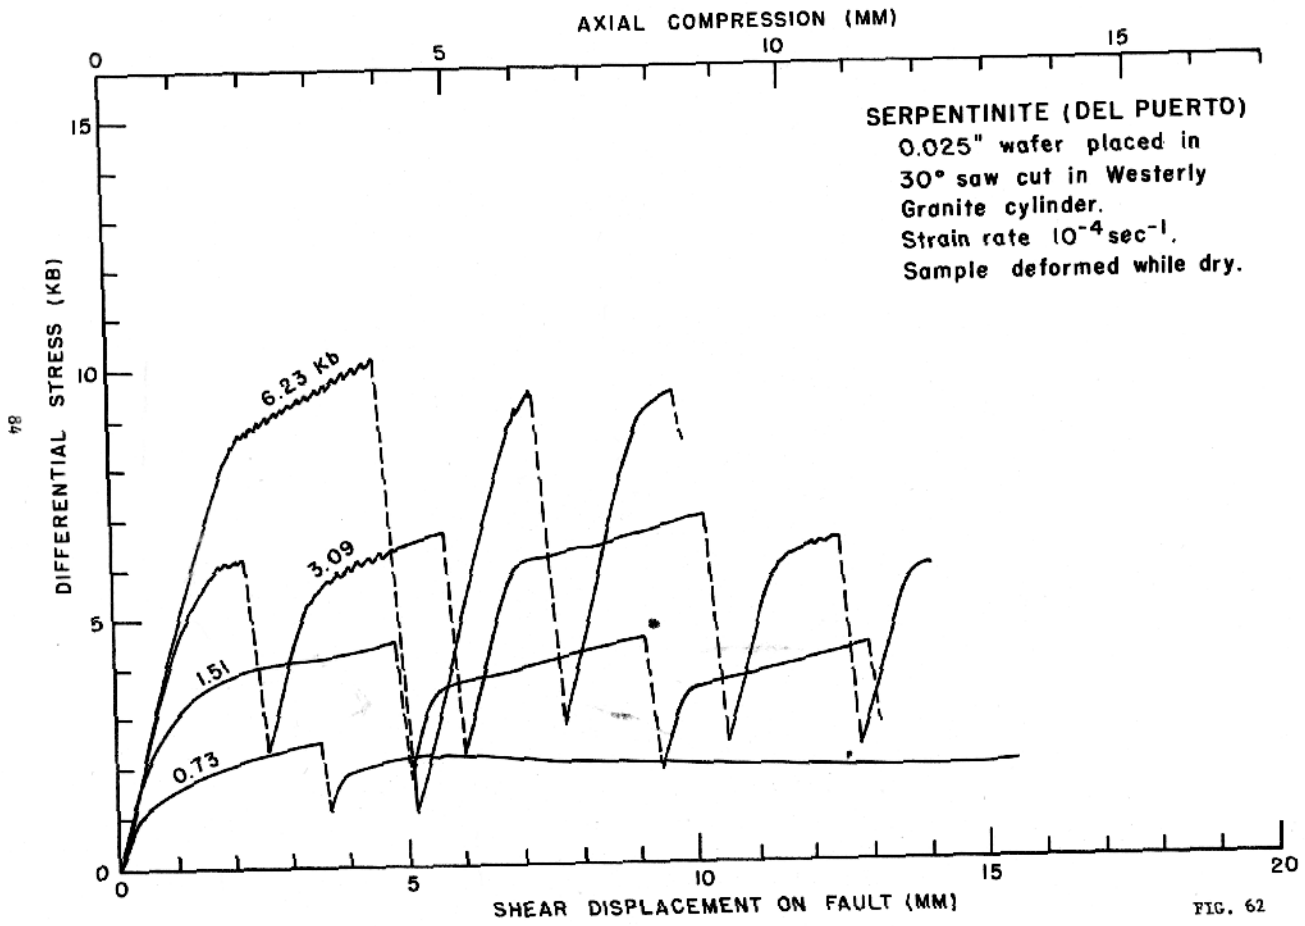
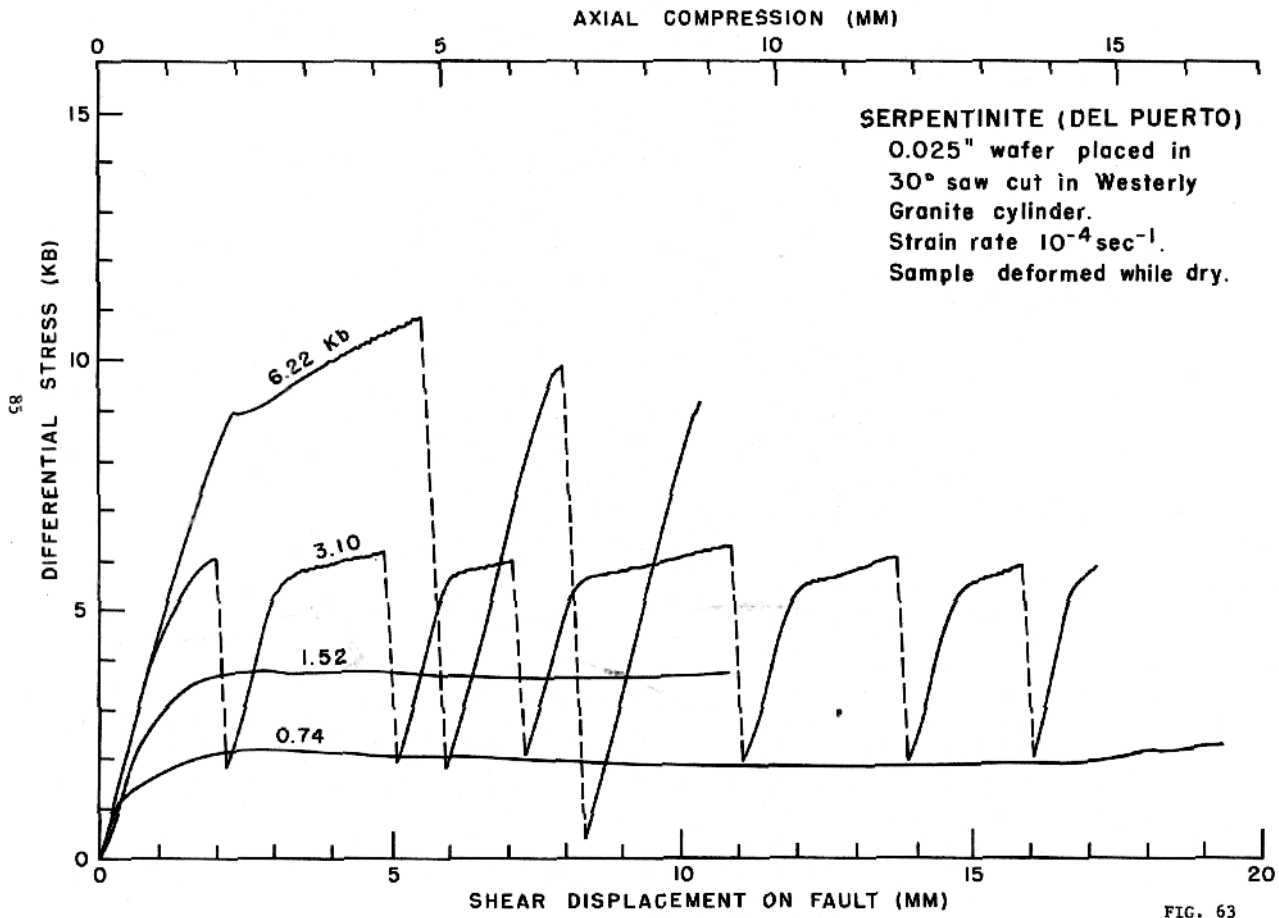


FIG. 60







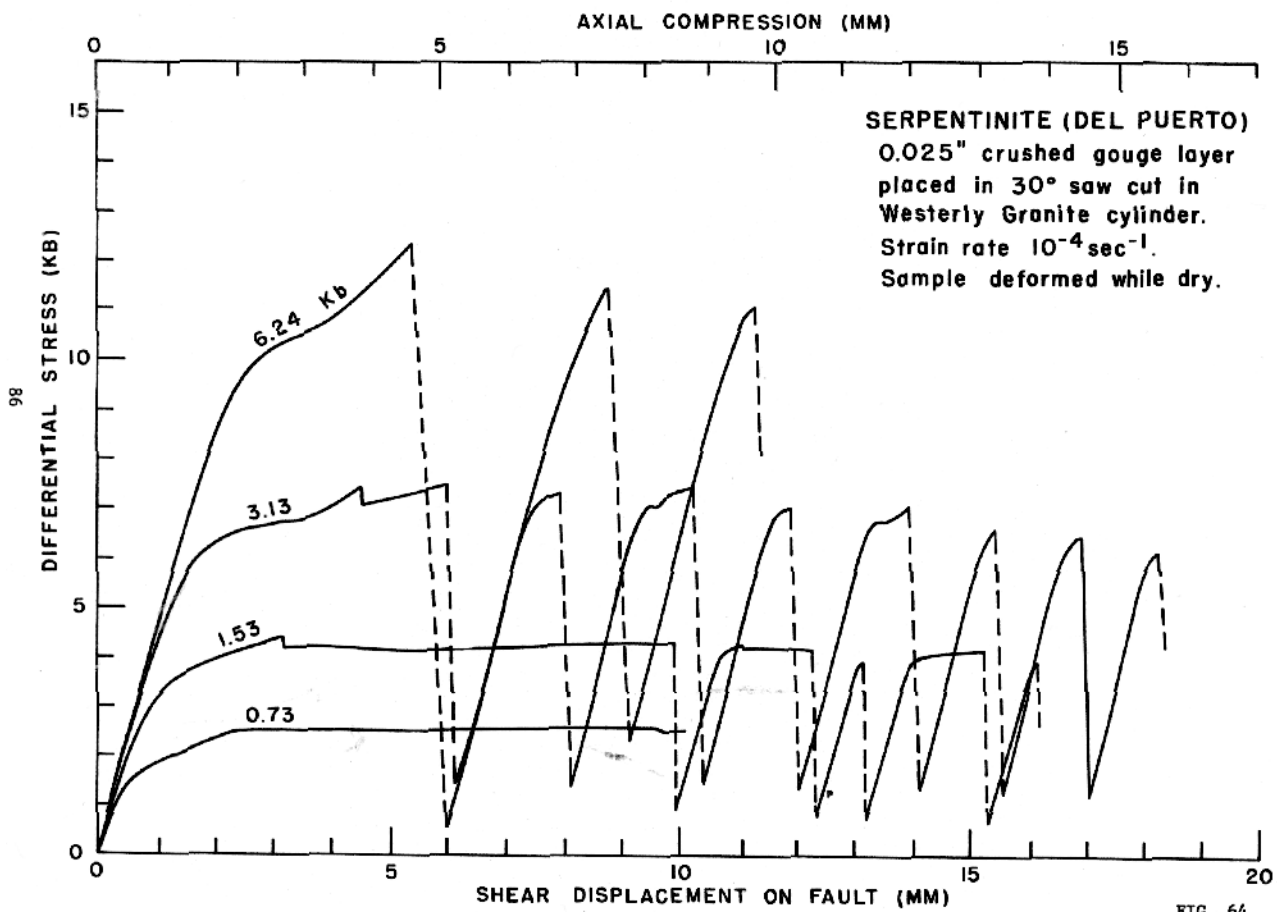


FIG. 64

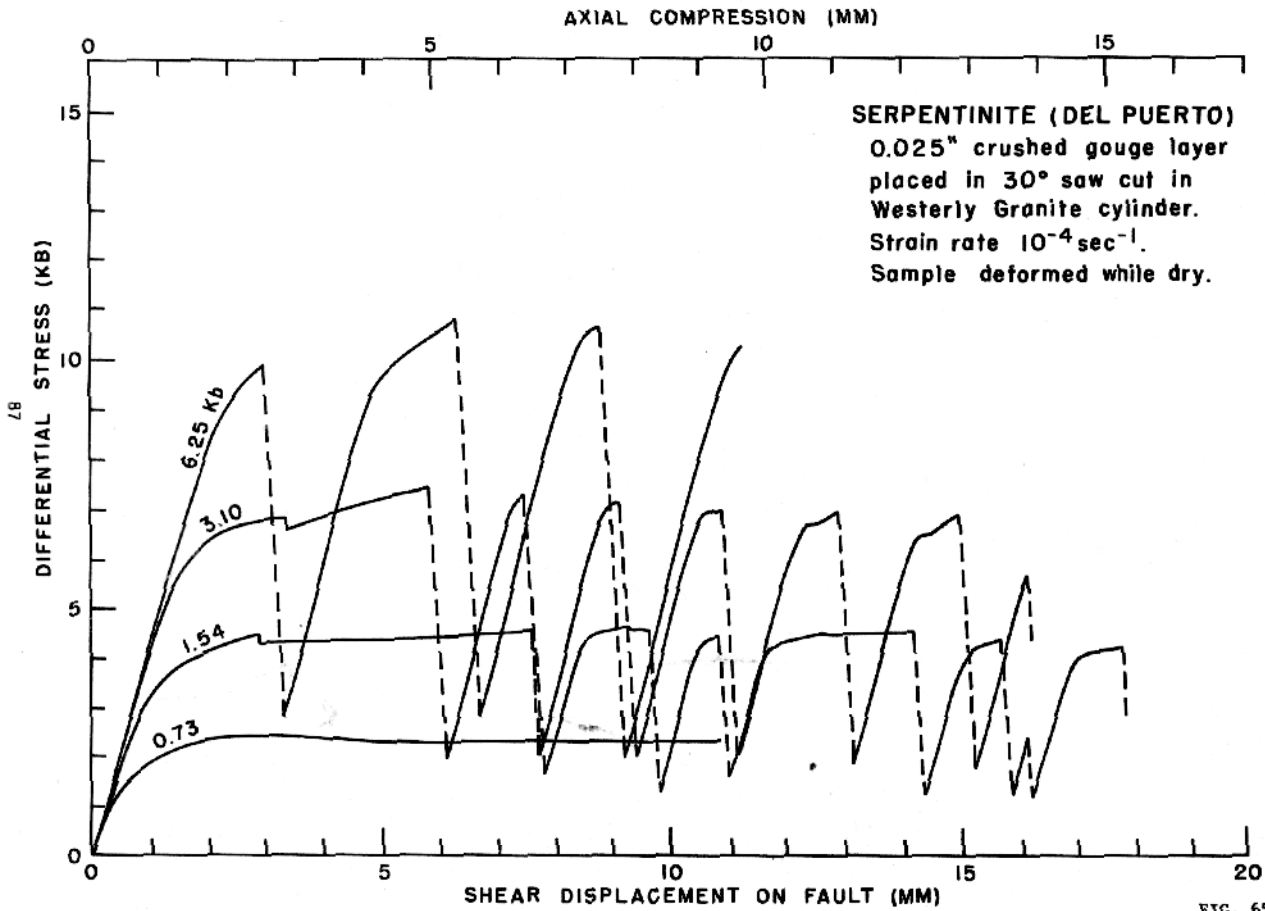


FIG. 65

## Solenhofen Limestone

Fig. 66,67) 0.025"-thick wafers of Solenhofen Limestone placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly Granite  
Confining pressures: 0.74 to 6.23 kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

### Comments:

Unstable stick slip was observed at all pressures. At 3/4 to 3 kb the limestone exhibited both upper and lower yield points at the beginning of inelastic deformation.

The unstable behavior at 0.74 kb was unusual and did not occur regularly in 0.025" layers of the other materials tested. Similar behavior was observed with the samples in which the sawcut faces were in direct contact without any insert.

In one of the 0.74 kb samples the unstable stick slip began only after a prolonged period of stable sliding. In the other identical sample, the stick slip occurred between two periods of stable sliding.

Further study is needed to explain the reason for the unstable behavior at 3/4 kb confining pressures.

For the samples run at pressures of 1.52 to 3.10 kb the greatest amount of stable sliding occurred during the first portion of the shearing, with the latter part of the shearing being noticeably more unstable.



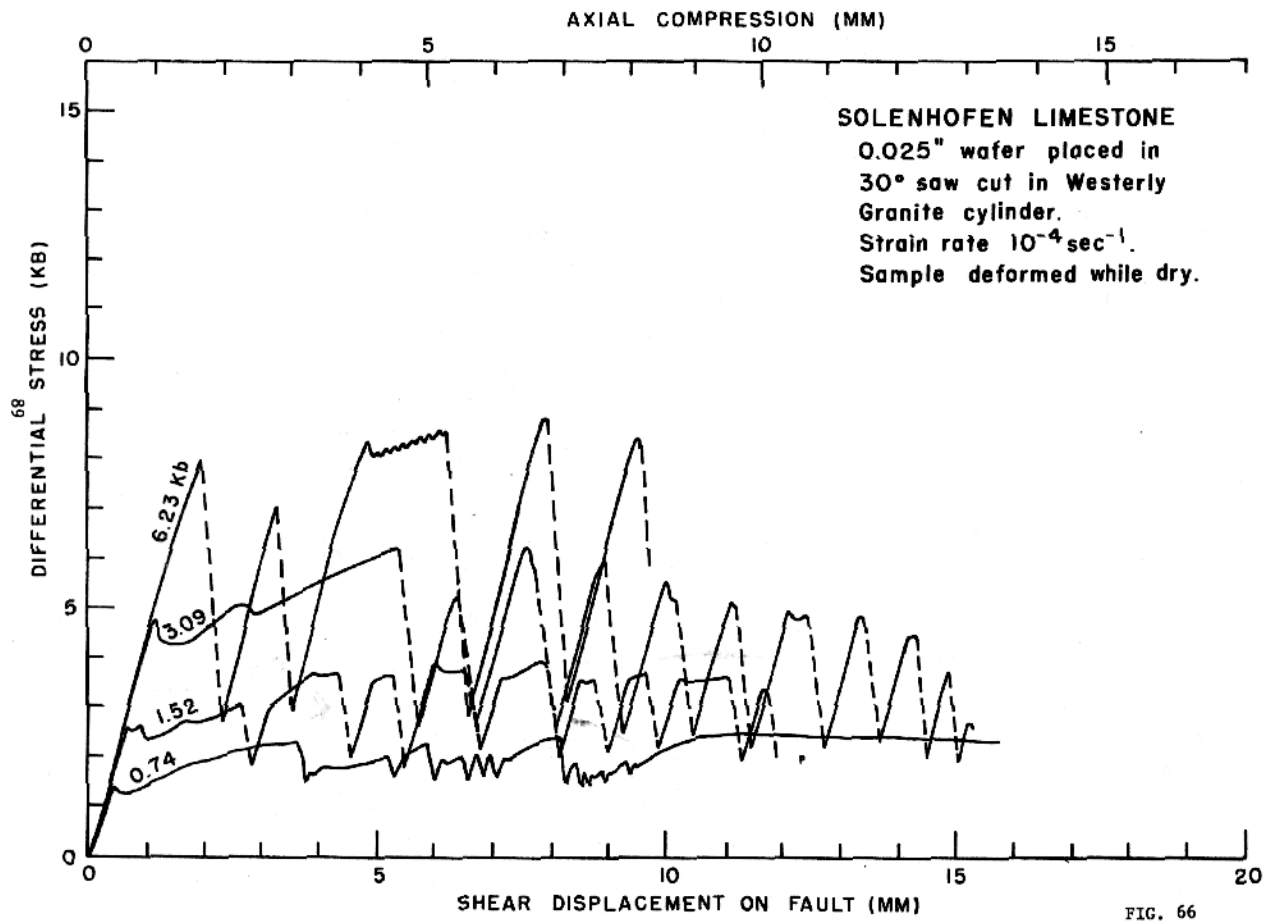


FIG. 66

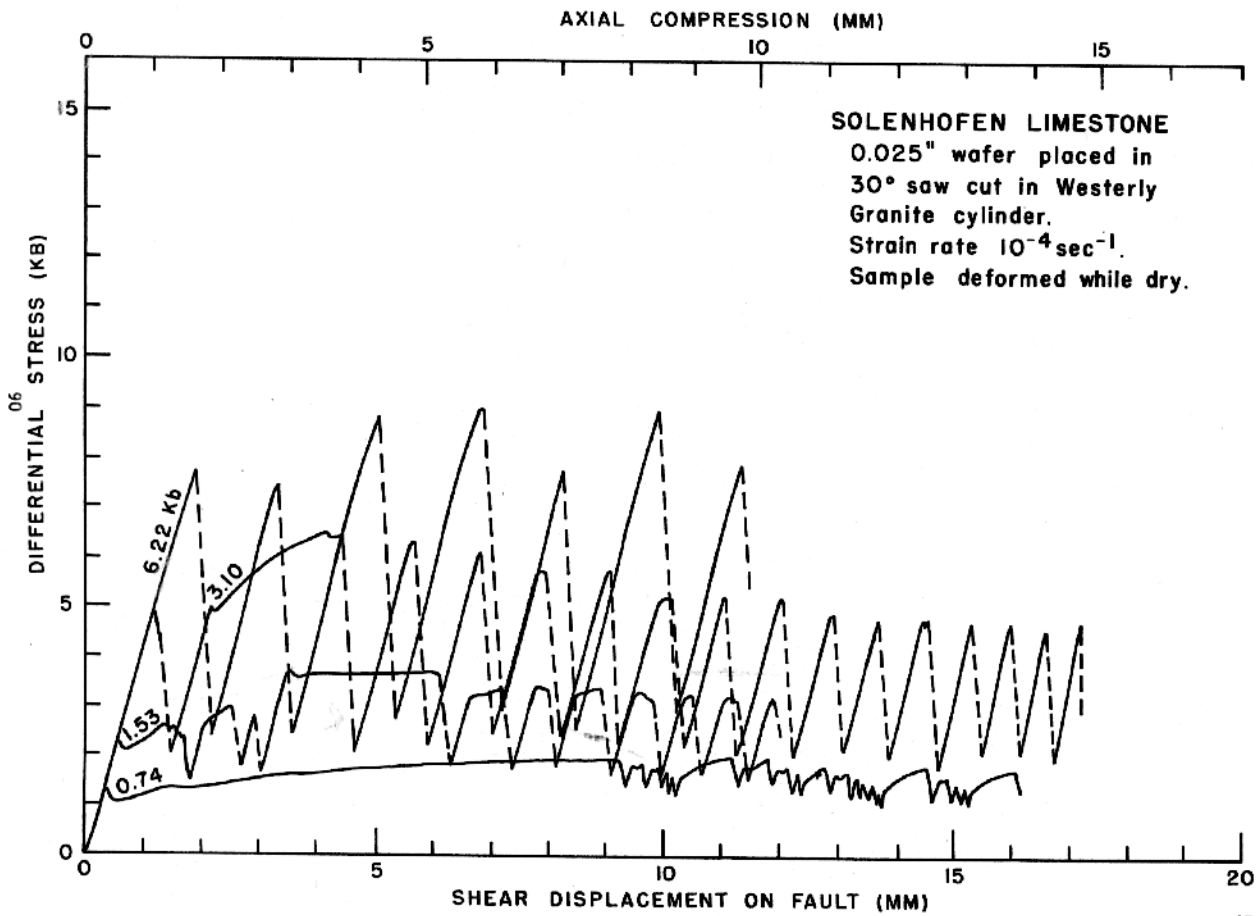


FIG. 67

## Talc

- Fig. 68) Intact cylinders (1" x 2.5") of talc  
Confining pressures: 1.92 to 5.87 kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$
- 69,70) Talc wafers (0.020", 0.040", 0.060", and 0.080" thickness)  
placed in a 30° sawcut in 1" x 2.5" cylinders of Westerly  
Granite  
Confining pressure:  $5.46 \pm 0.01$  kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$
- 71,72) Talc wafers (0.025" thickness) placed in a 30° sawcut  
in 1" x 2.5" cylinders of Westerly Granite  
Confining pressures: 0.74 to 6.26 kb  
Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

### Comments:

Each intact cylinder of talc (Fig. 68). was run at successively higher confining pressures. The stress level supported increased as the confining pressure was increased. At a given confining pressure the stress increased slowly as deformation proceeded.

Two types of studies were made on the wafers of talc placed in the saw cut granite cylinders. In the first study (Fig. 69,70) several effects were observed which can be attributed to differences in fault zone thickness. Over the range of 0.020" to 0.080" increasing the thickness of the fault gouge layer reduced the level of stress that was supported, and also reduced the magnitude of the observed stress drops. Comparison with the originally intact samples shows that the intact samples supported significantly lower stress and deformed more stably than any of the wafer

samples. This may indicate that the effective width of the shear zone formed in the intact samples was greater than than formed in the 0.080" wafer samples.

During the second study (0.025" wafers at varied pressures, Fig. 71,72) increases in confining pressure produced increases in the stress supported by the talc layer. The stress was significantly greater than that observed at comparable confining pressure during the experiments on intact cylinders of talc. For this study, two samples were run at each confining pressure used. At 0.74 to 0.75 kb, all deformation was by stable sliding. At 1.51 to 1.53 kb one sample had a single small stress drop and the other had two small stress drops. At 3.10 kb one sample produced a single large stick slip event after prolonged stable sliding; the other deformed stably. At 6 1/4 kb both samples produced one large stick slip event and one small event.

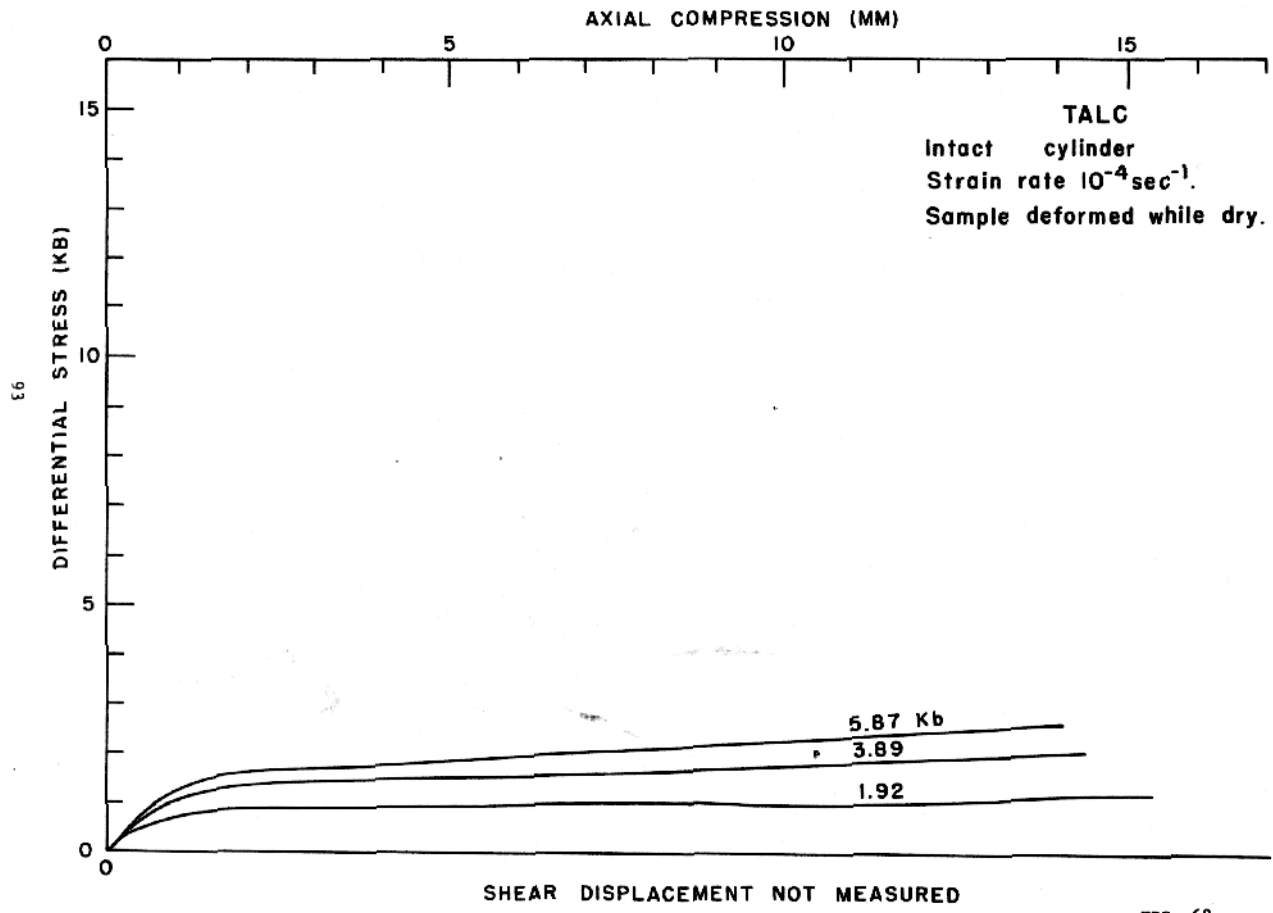


FIG. 68

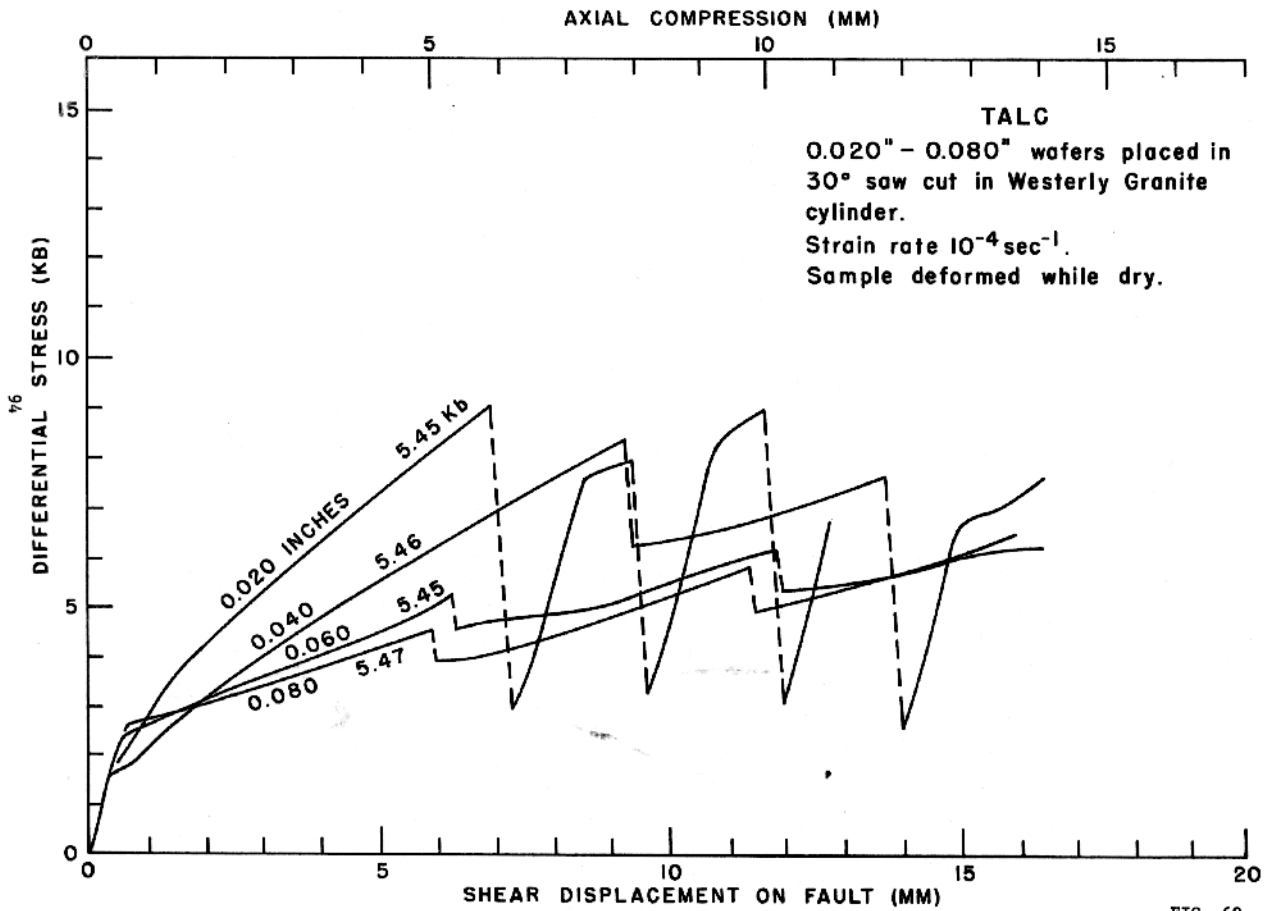
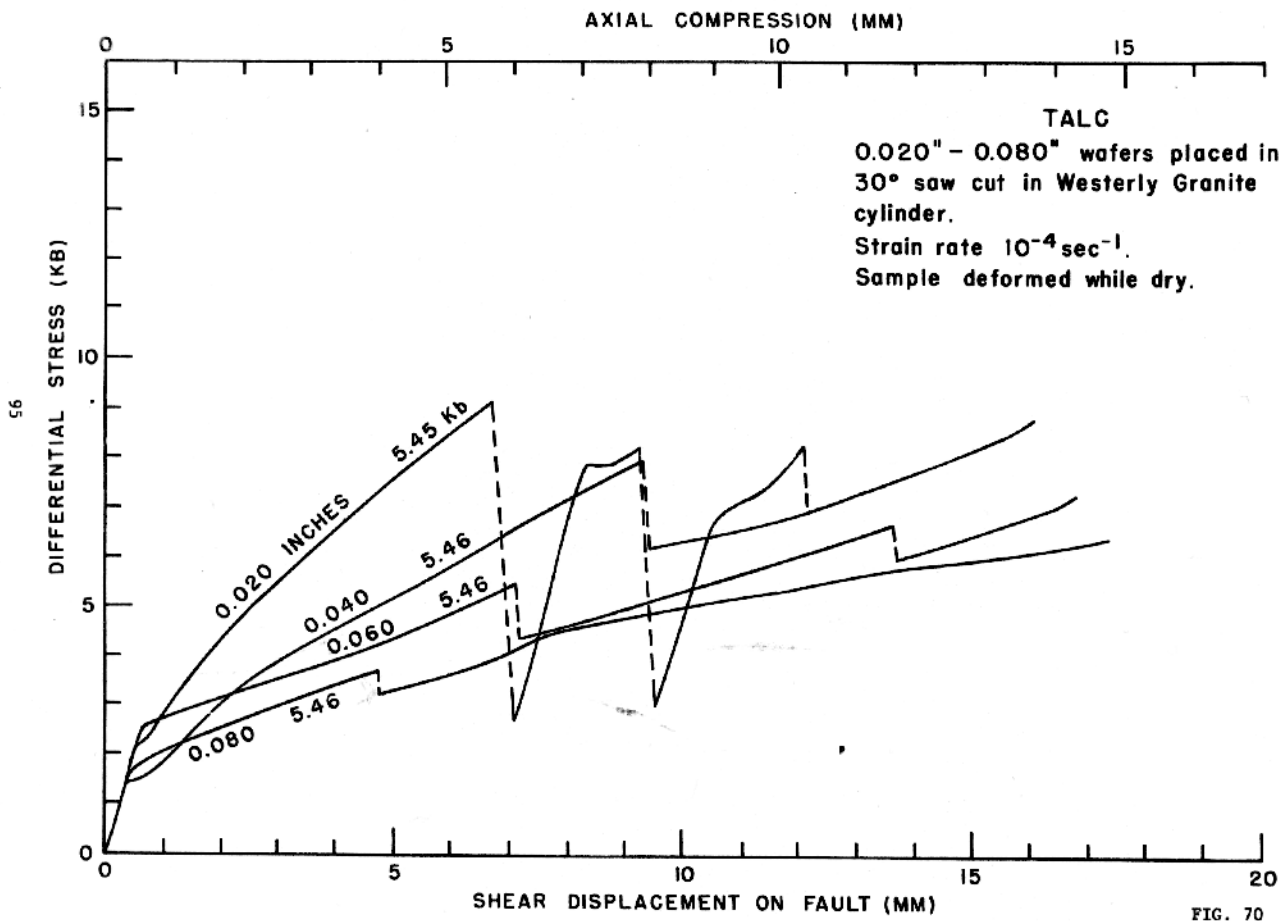


FIG. 69



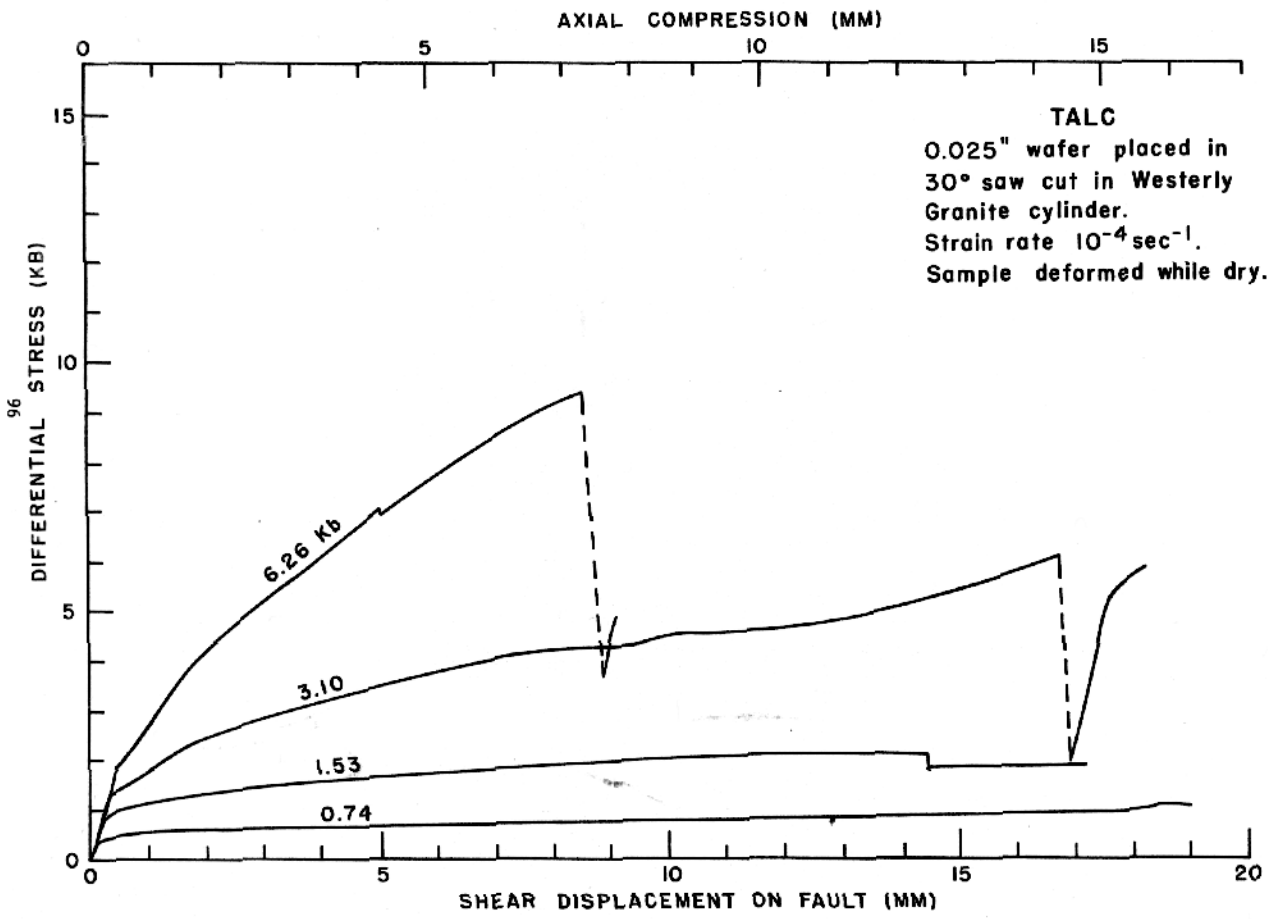


FIG. 71



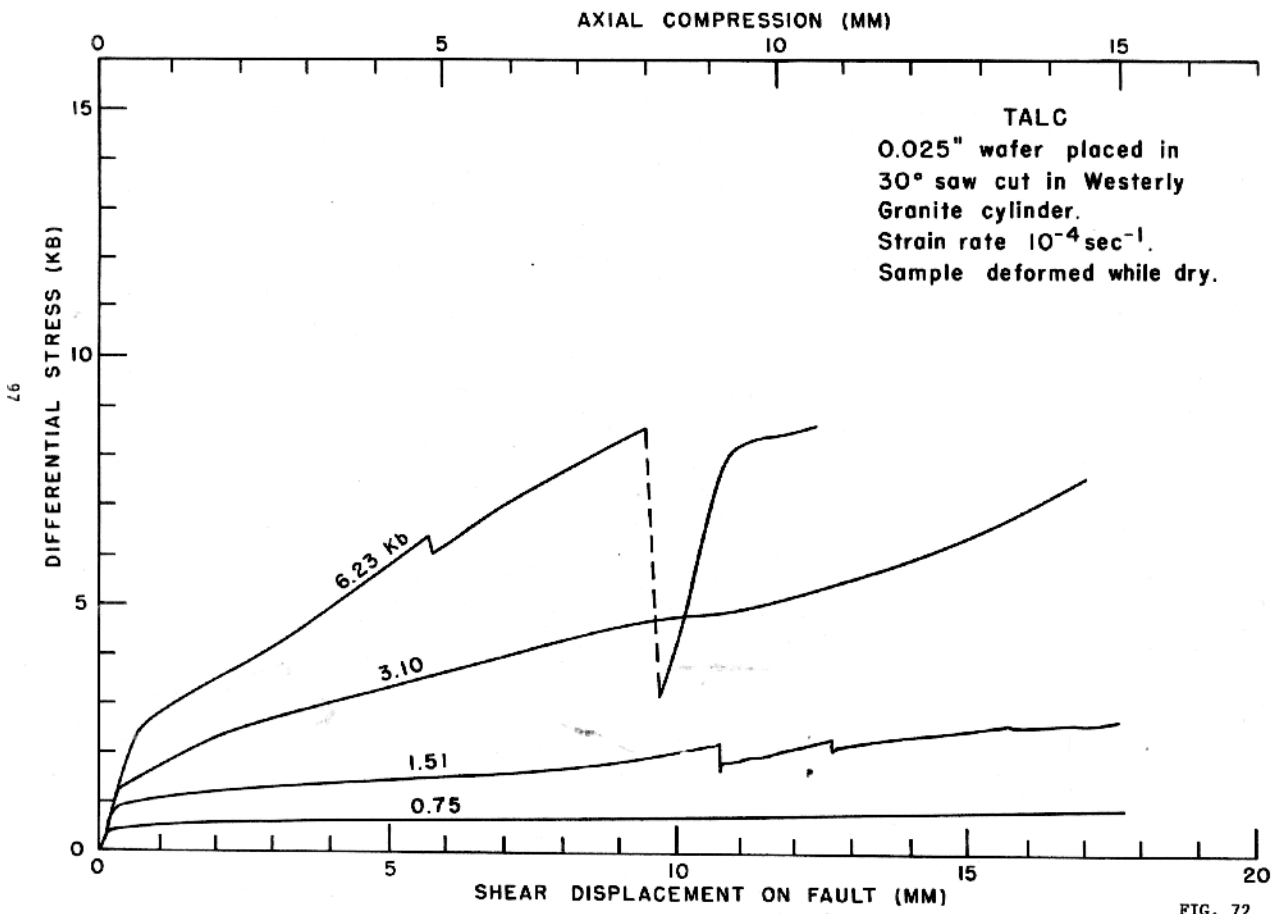


FIG. 72

Westerly Granite, intact

Fig. 73-84) Intact cylinders of Westerly Granite, 1.000" x 2.500"  
Confining pressures: 0.39 to 6.98 kb  
Axial compression strain rates:  $10^{-4} \text{ sec}^{-1}$ ,  
 $10^{-5} \text{ sec}^{-1}$ ,  $10^{-6} \text{ sec}^{-1}$

Comments:

These samples of intact granite were loaded until they failed in compression. If the sample jacket survived the violent failure of the granite, and most did, the deformation was continued by sliding on the resulting fracture plane. The succeeding peaks reflect the axial component of the frictional stress supported across the shear zone.

Stick slip events were observed at confining pressures as low as 0.80 kb. However, most samples below 1.20 kb showed only minor instabilities. Above 1.57 kb violent stick slip always occurred and the stress drops tended to become larger as the confining pressure was increased.

The charts at all strain rates were measured for the amount of creep that preceded the first stick slip failure. This was found to decrease as the confining pressure was increased. Within the range studied, the amount of creep before slip was independent of the strain rate. This work has been described farther in the paper by Byerlee and Summers, "Stable Sliding Preceding Stick-slip on Fault Surfaces in Granite at High Pressure" (Pageoph v 113, 1975).

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$ .  
Sample deformed while dry.

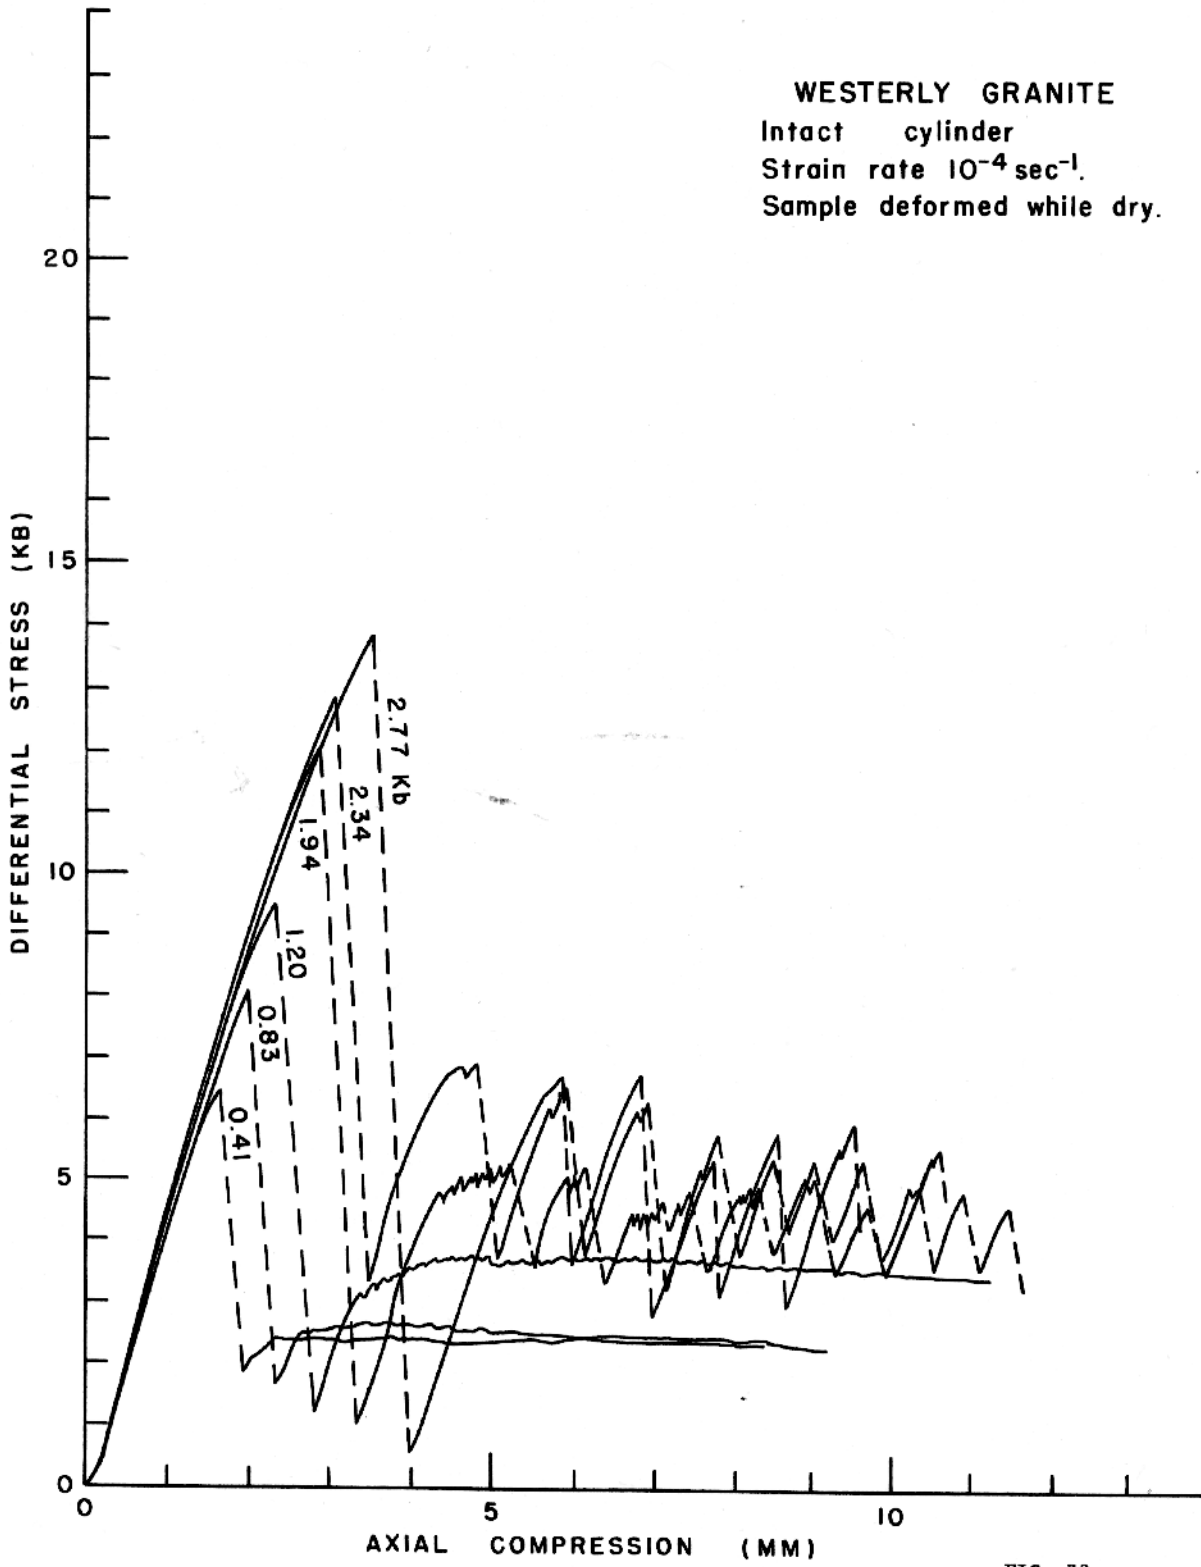


FIG. 73

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$ .  
Sample deformed while dry.

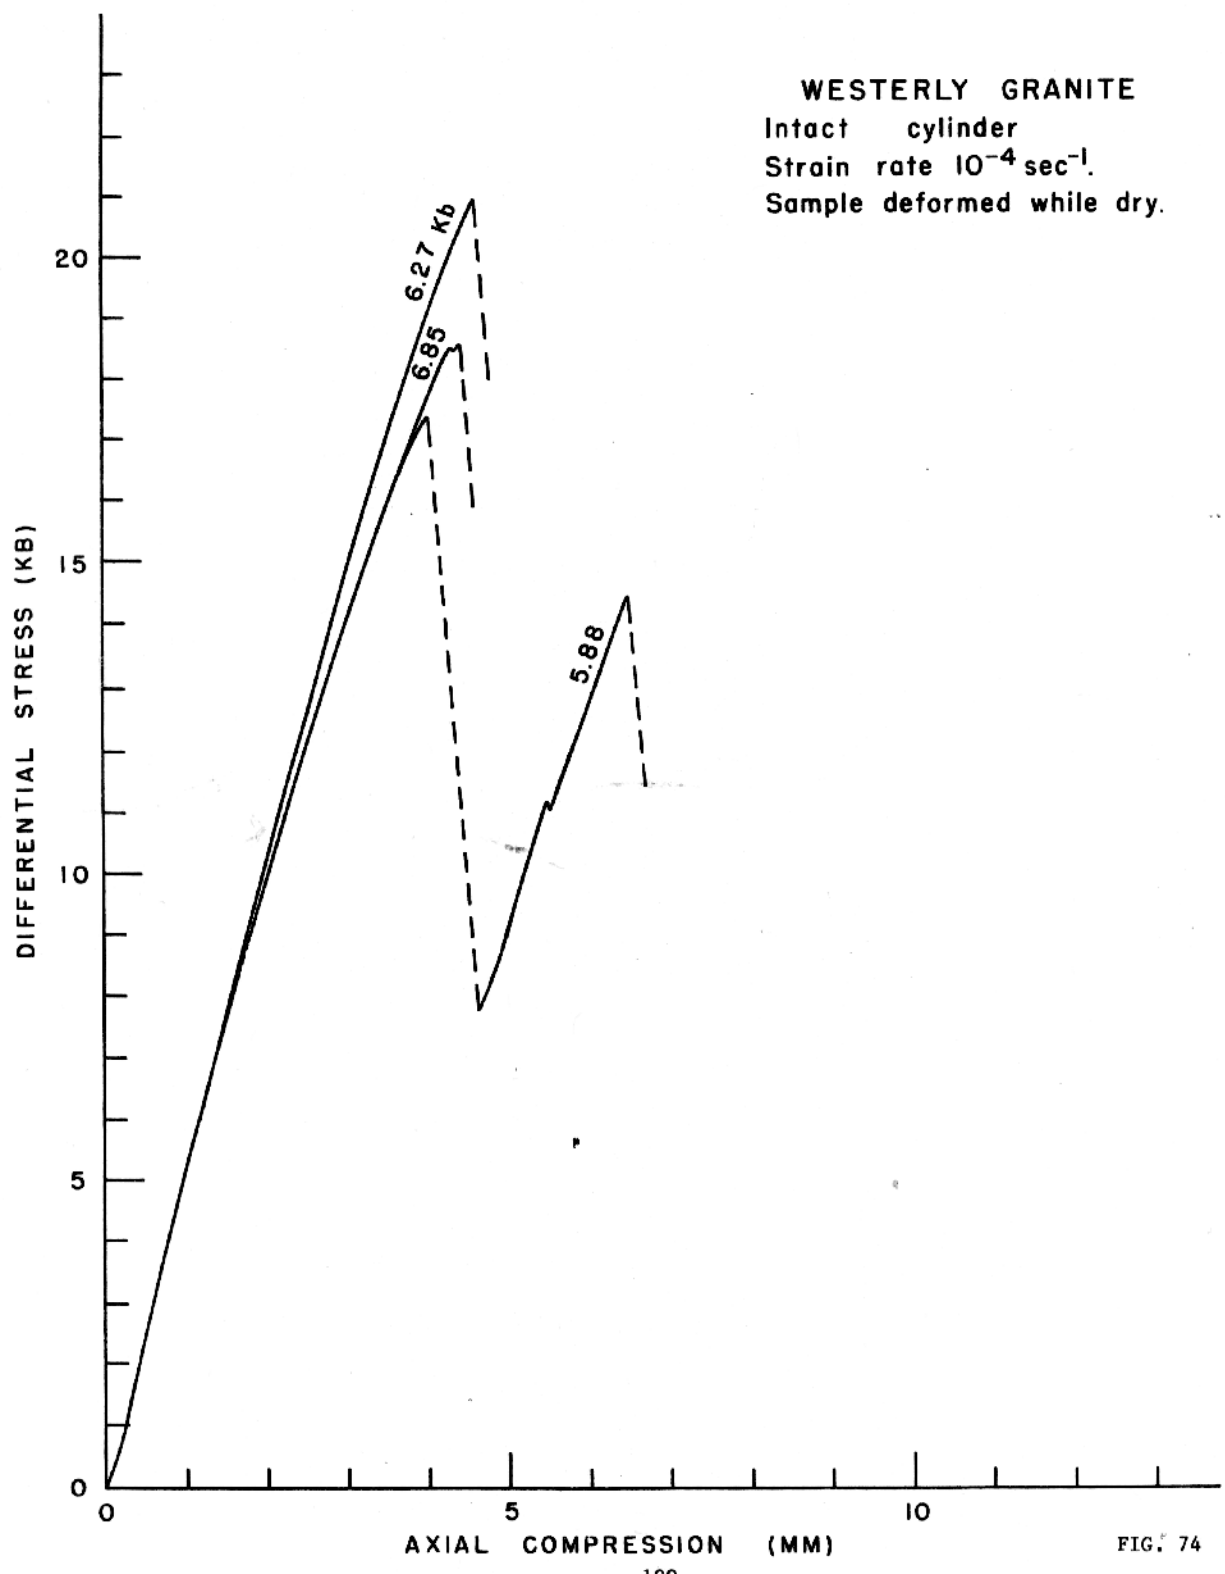


FIG. 74

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$ .  
Sample deformed while dry.

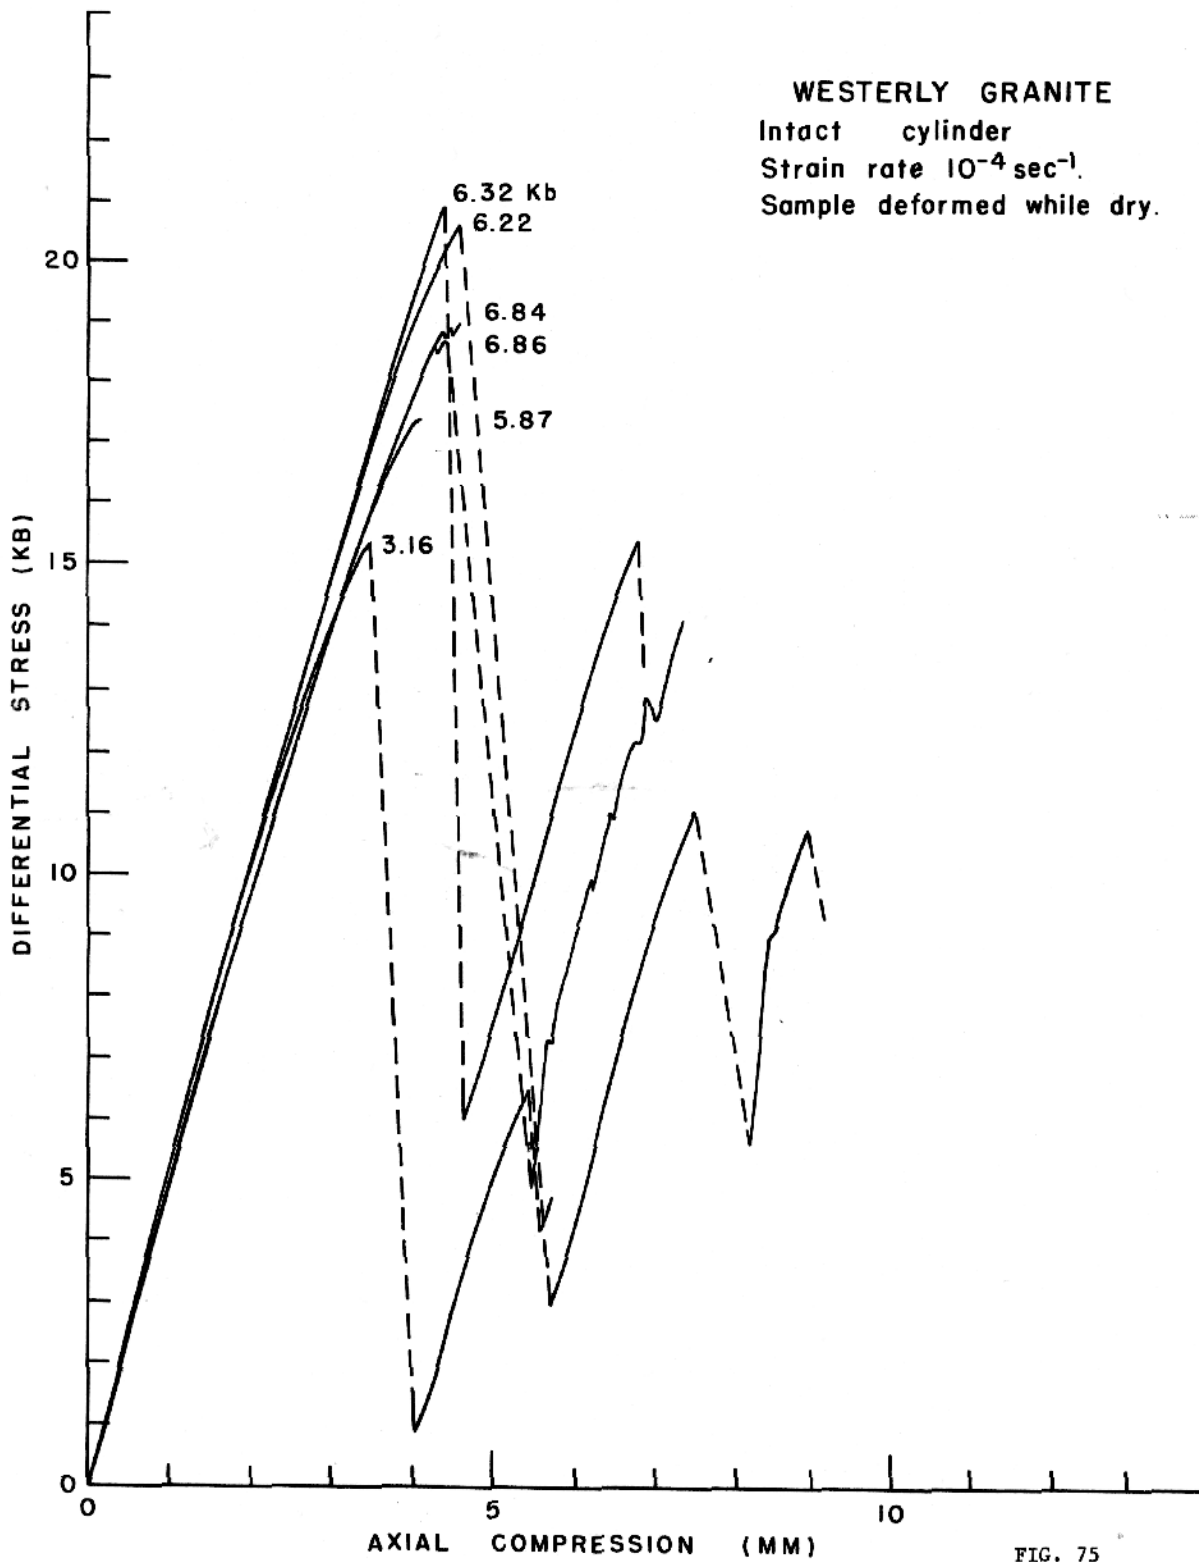


FIG. 75

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$ .  
Sample deformed while dry.

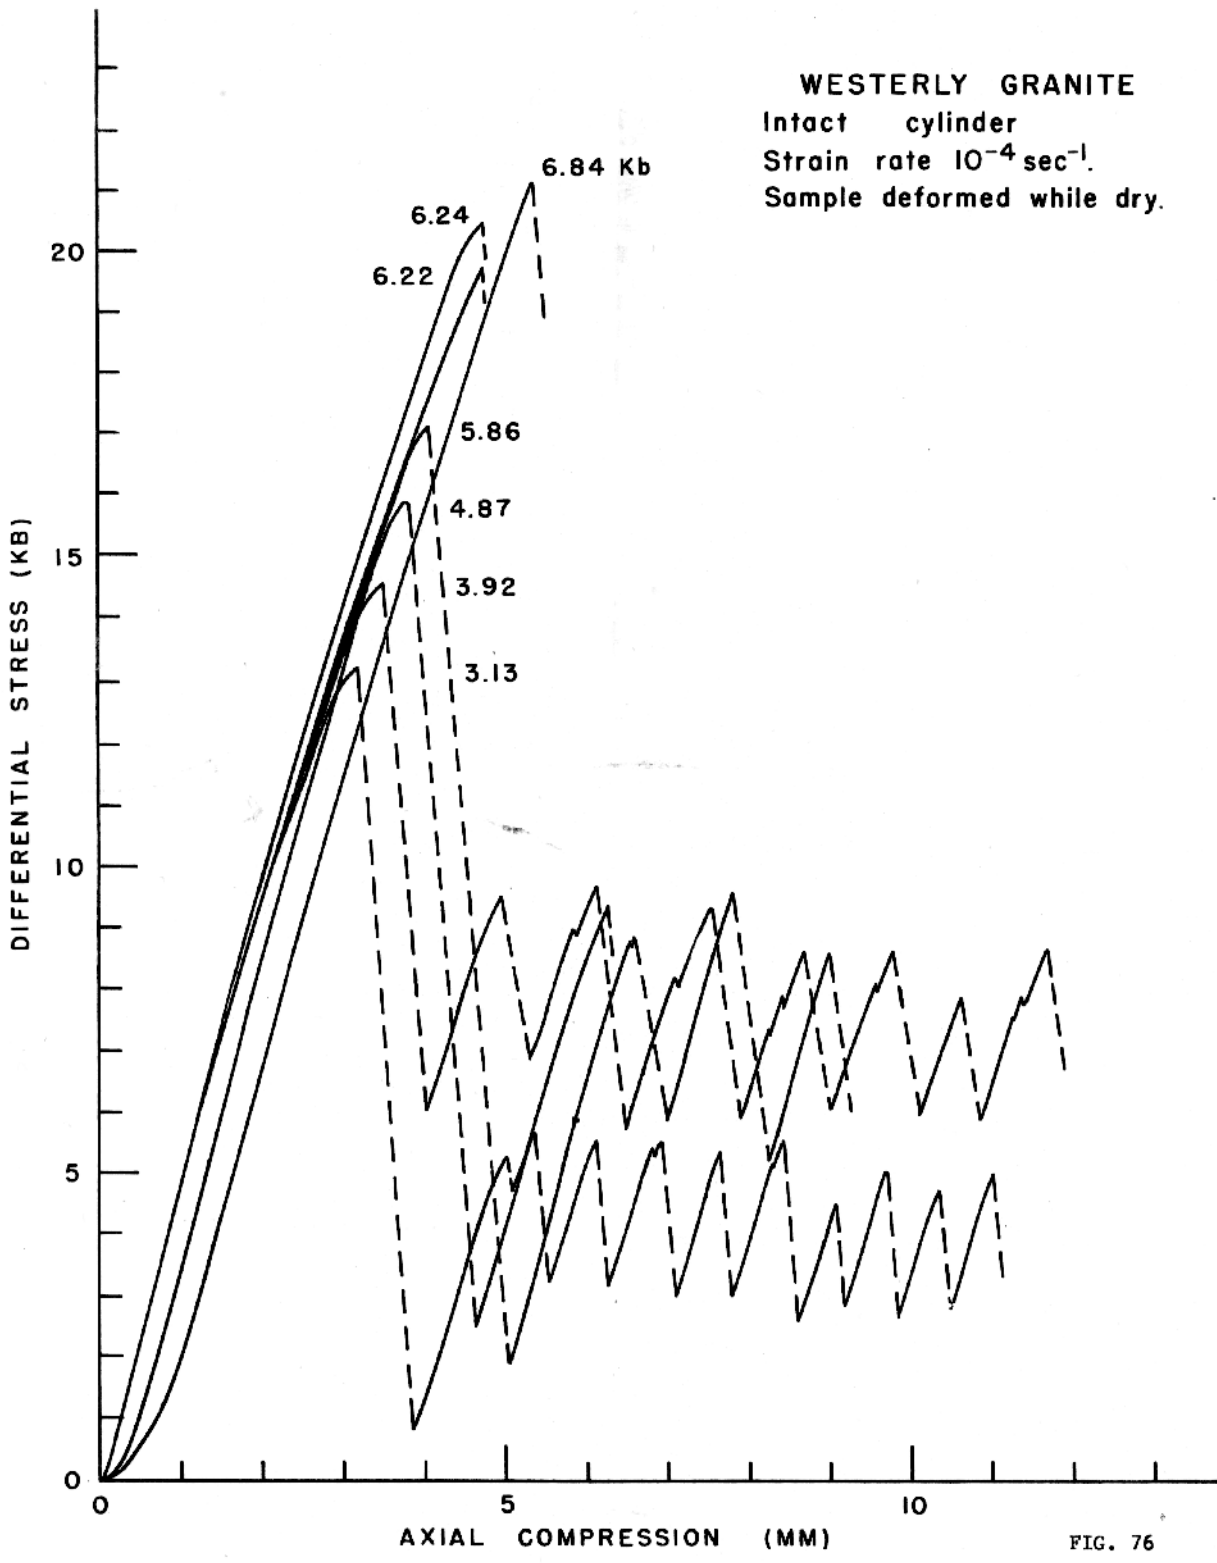


FIG. 76

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$   
Sample deformed while dry.

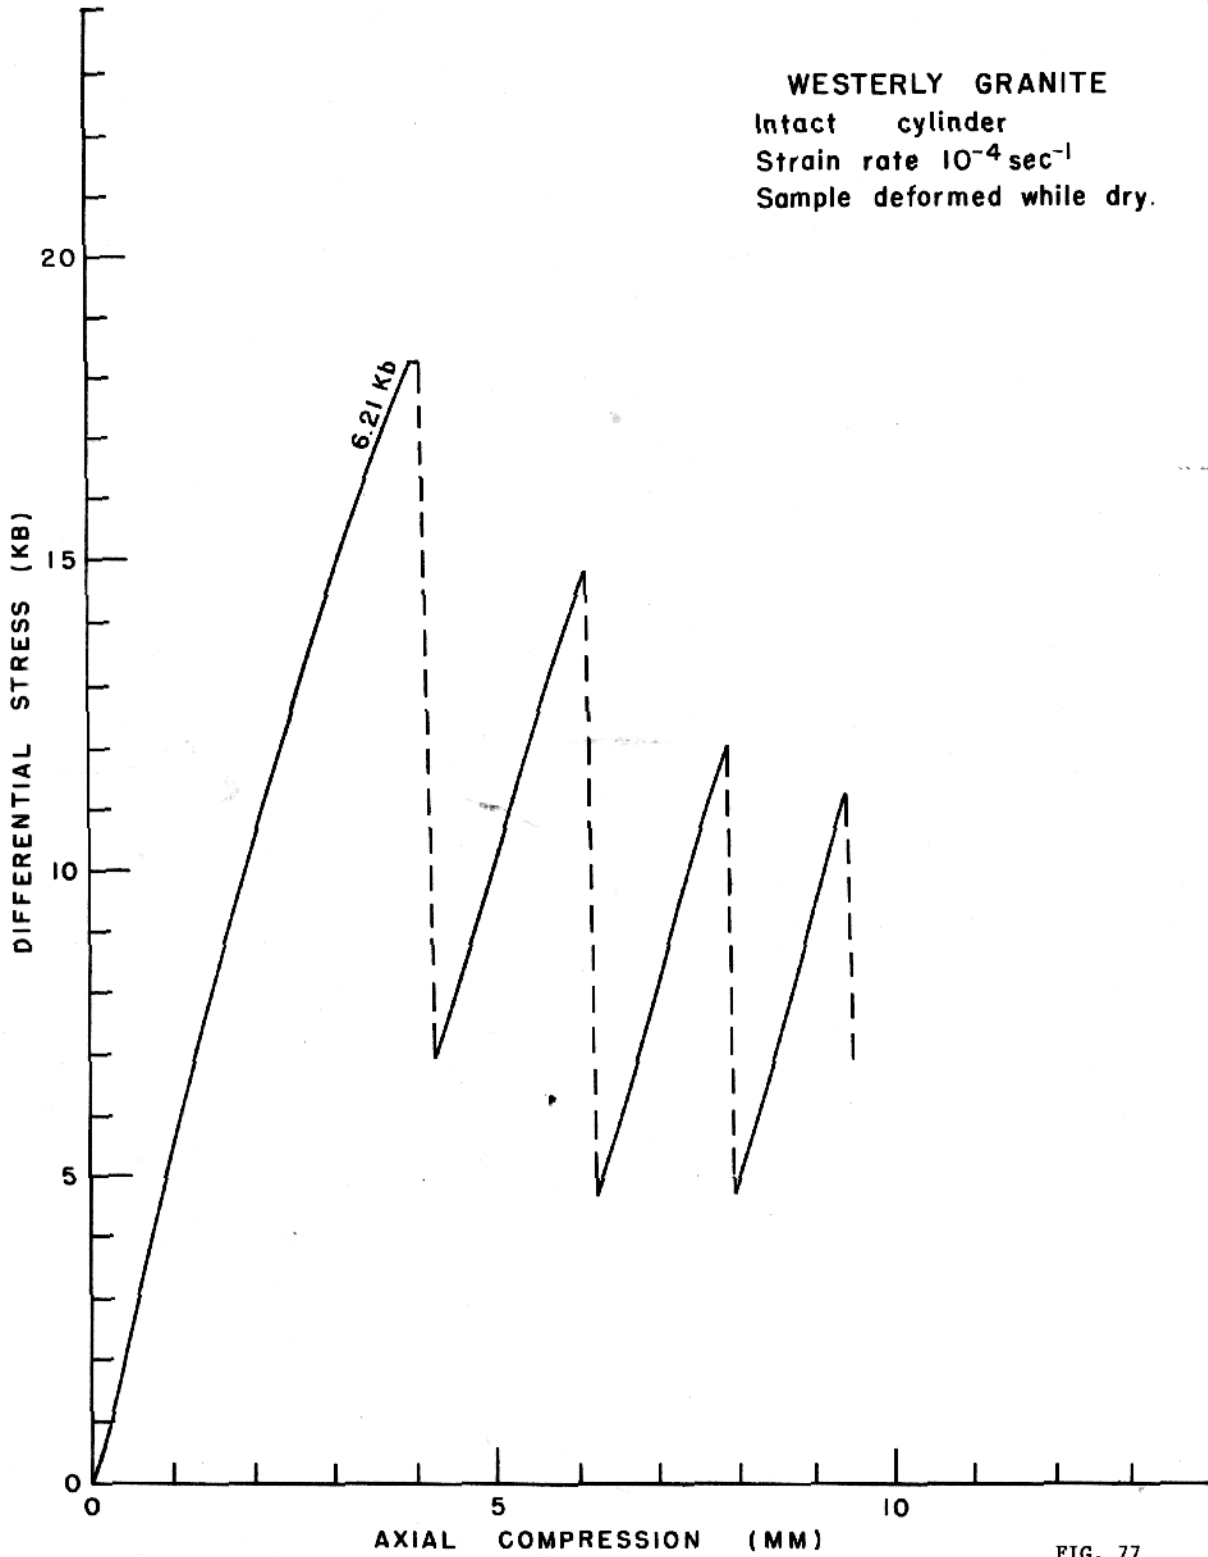


FIG. 77

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-4} \text{ sec}^{-1}$ .  
Sample deformed while dry.

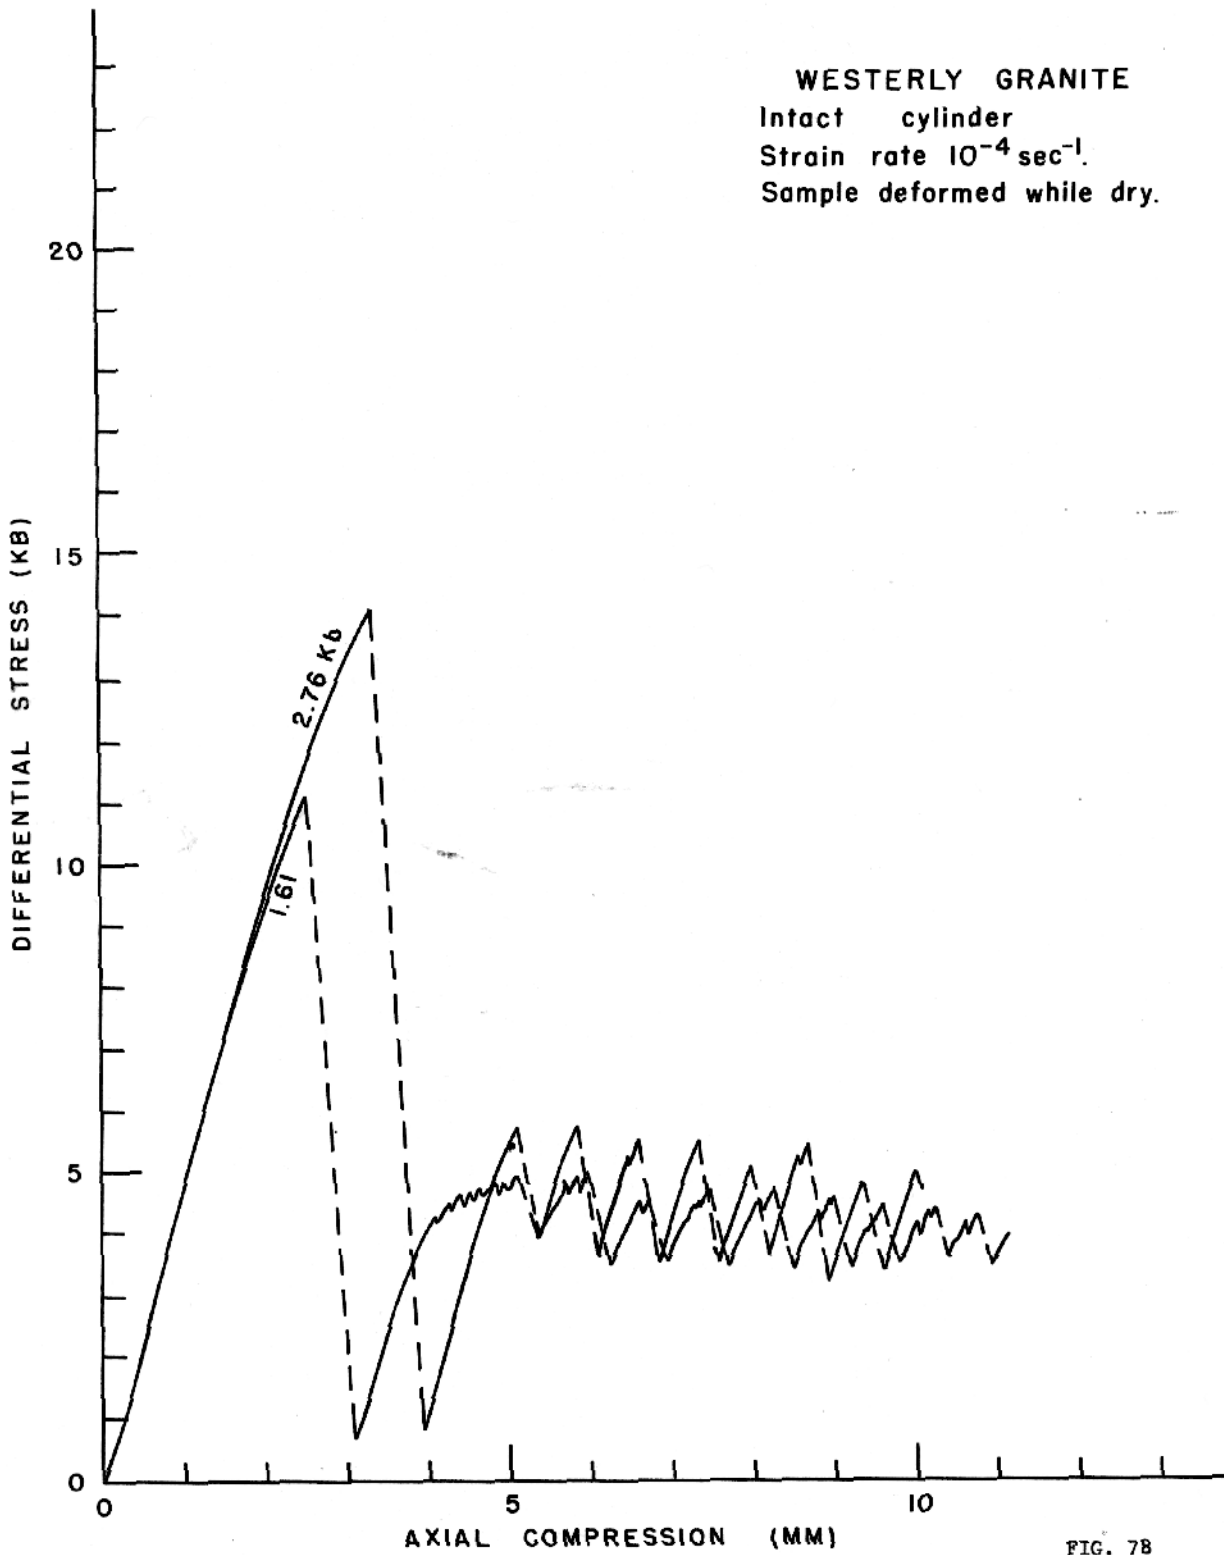


FIG. 78



WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-5} \text{ sec}^{-1}$ .  
Sample deformed while dry.

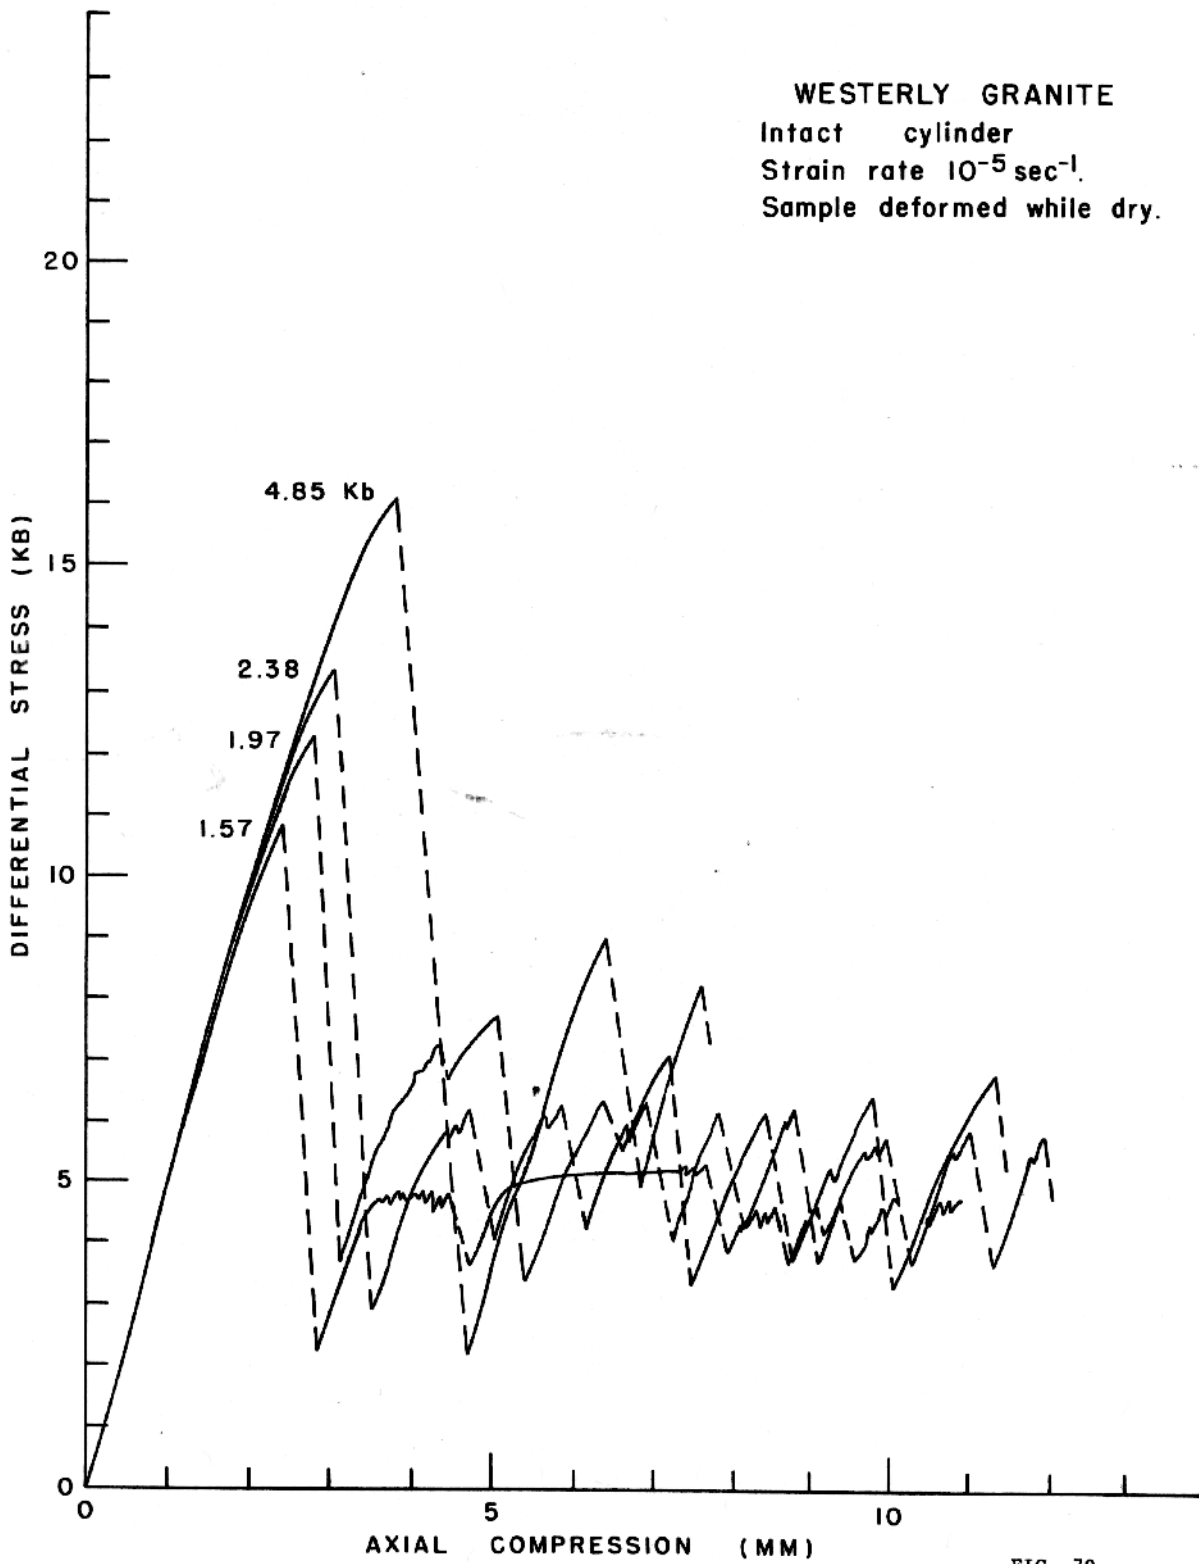


FIG. 79

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-5} \text{sec}^{-1}$ .  
Sample deformed while dry.

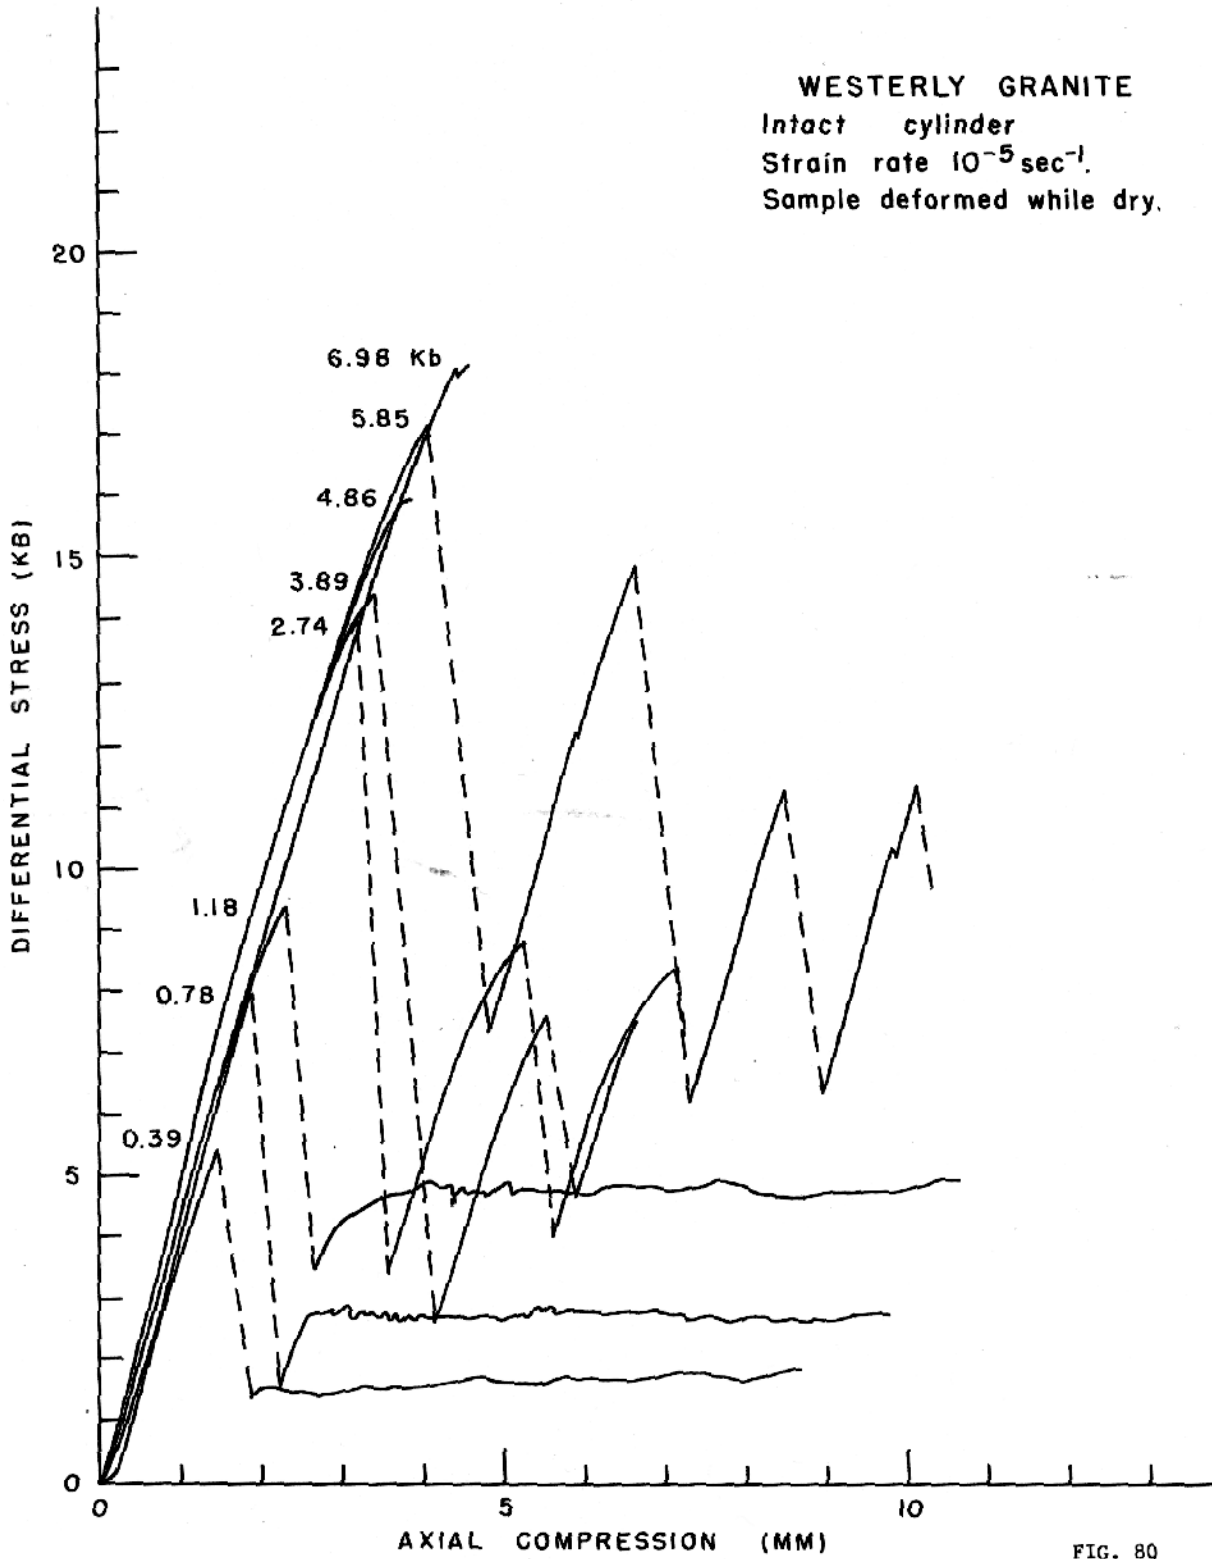


FIG. 80

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-6} \text{ sec}^{-1}$   
Sample deformed while dry.


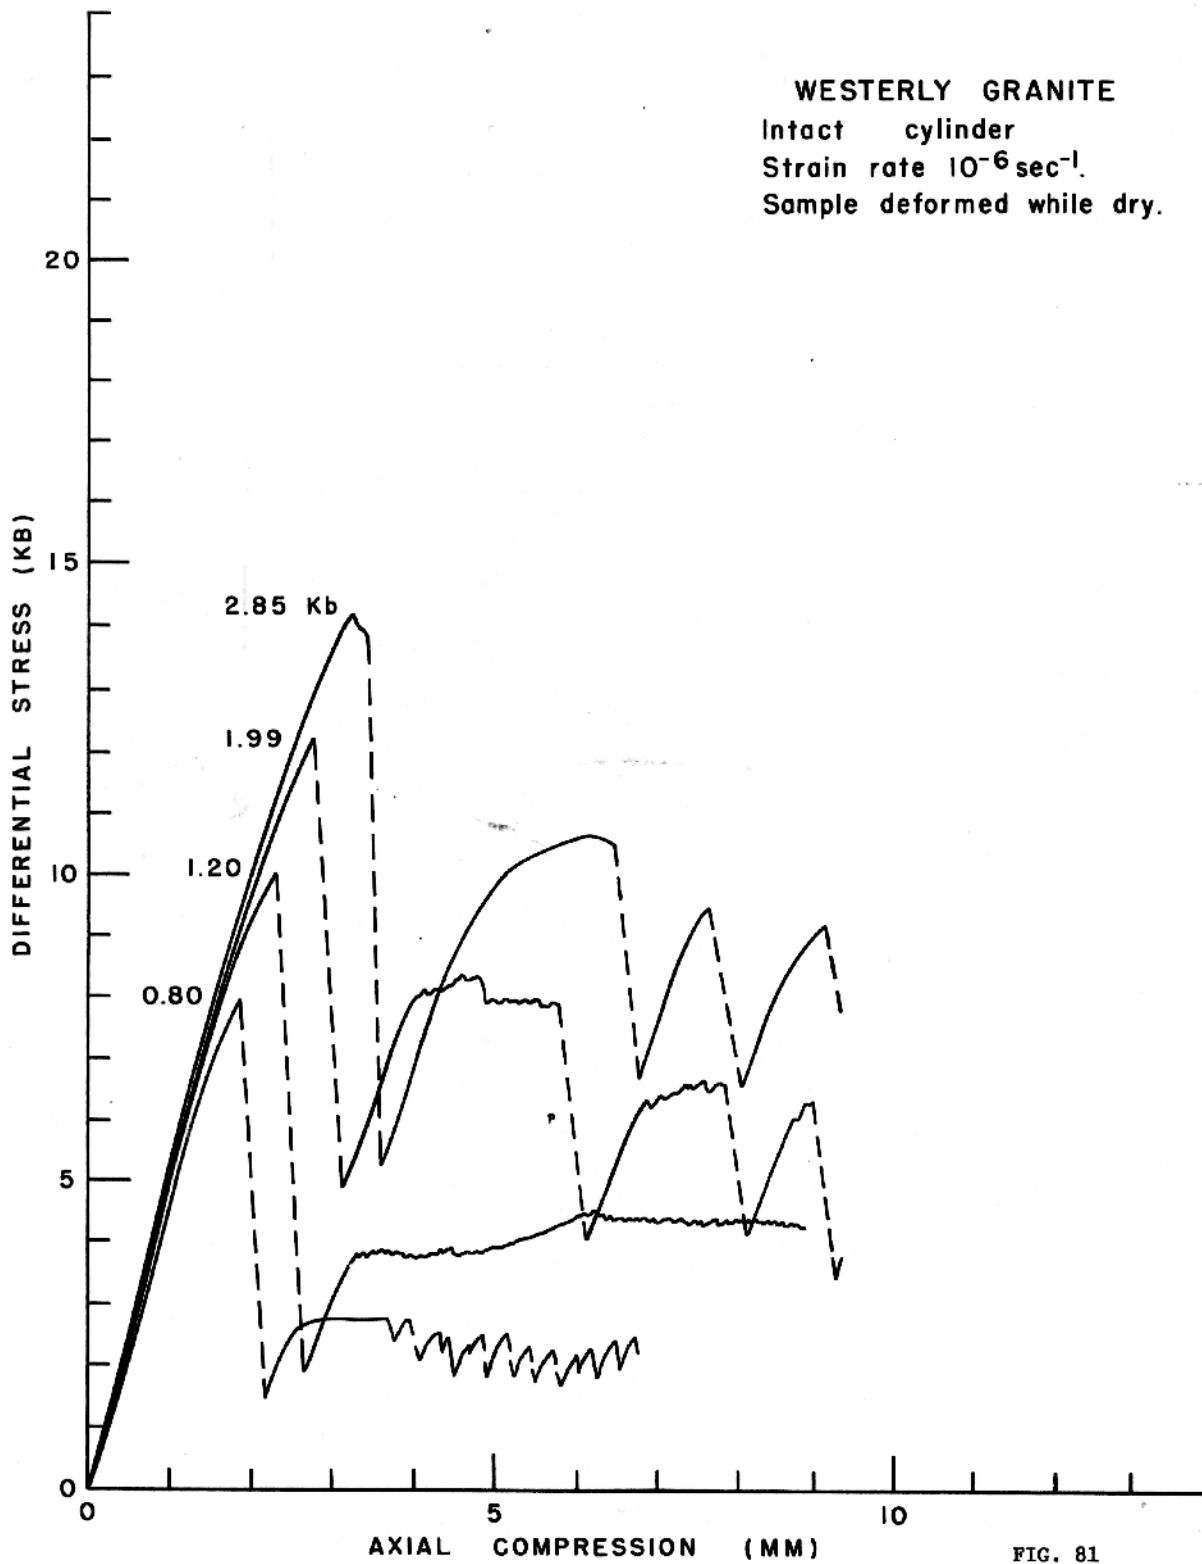


FIG. 81

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-6} \text{sec}^{-1}$ .  
Sample deformed while dry.

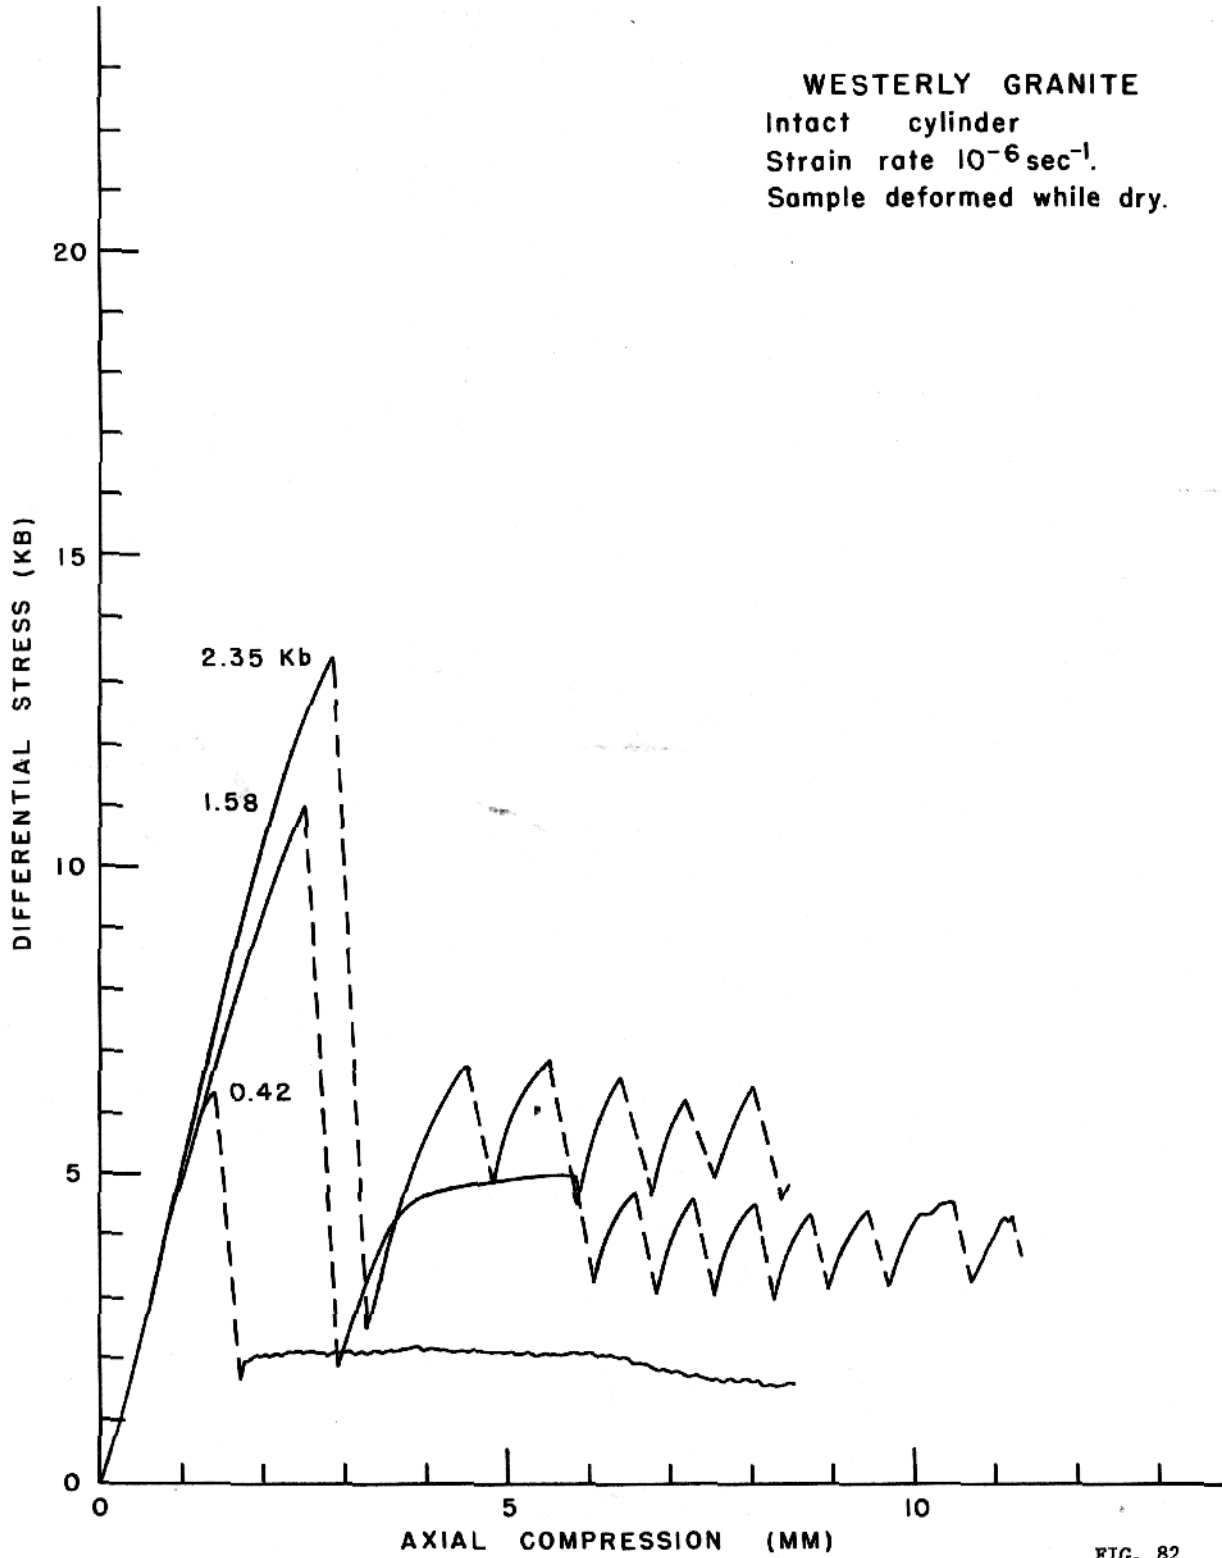

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-6} \text{ sec}^{-1}$ .  
Sample deformed while dry.

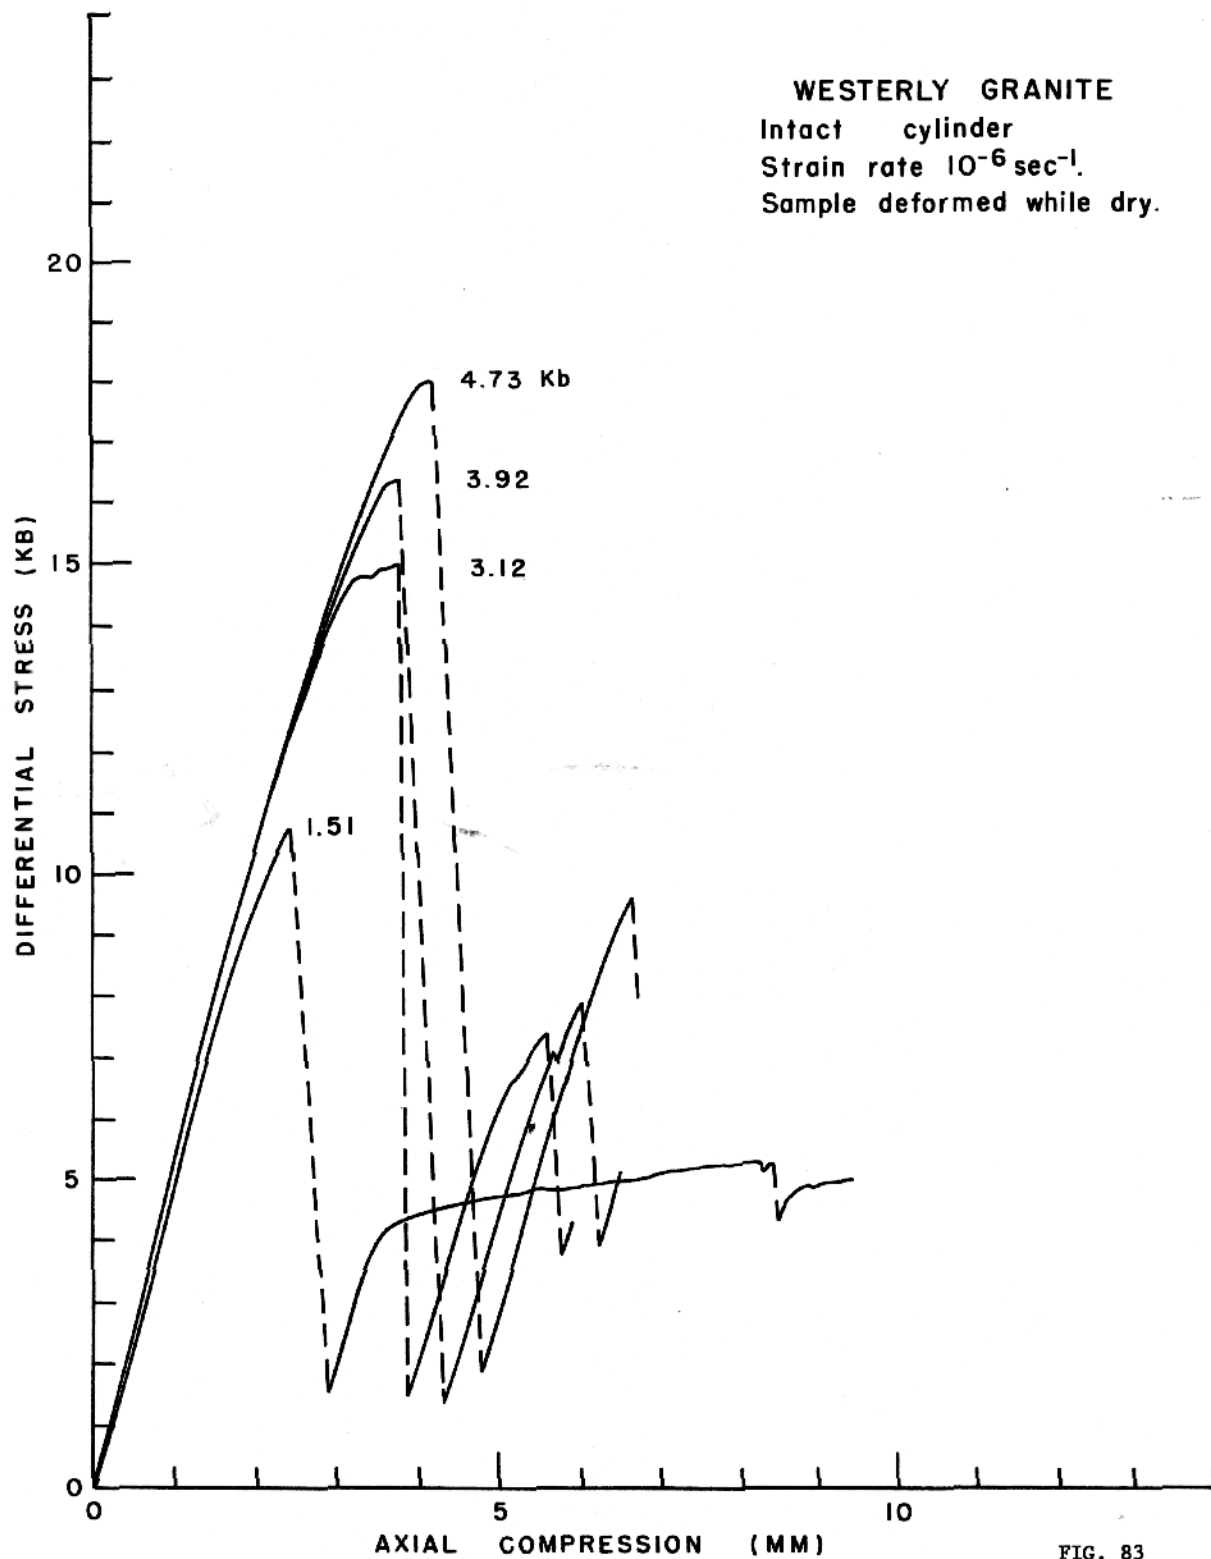


FIG. 83

WESTERLY GRANITE  
Intact cylinder  
Strain rate  $10^{-6} \text{ sec}^{-1}$ .  
Sample deformed while dry.

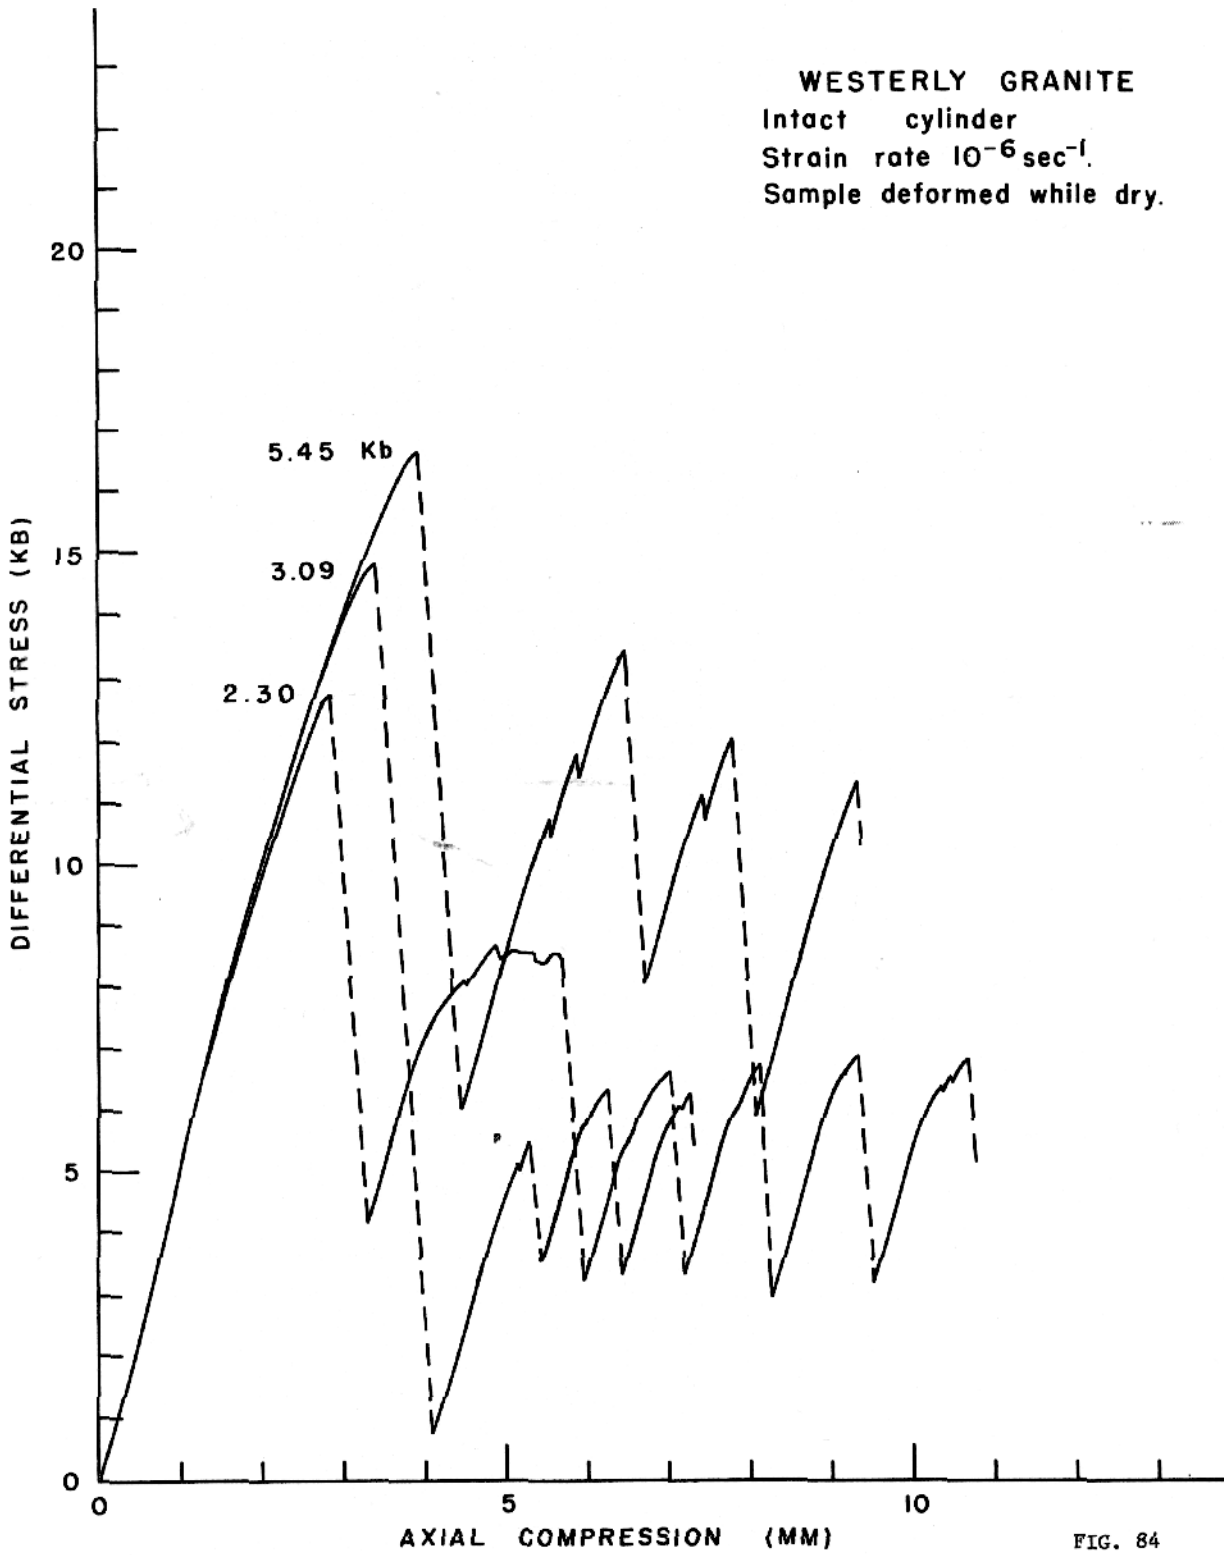


FIG. 84

Westerly Granite, clean sawcut surfaces

Fig. 85-89 ) 1"x 2.5" cylinders of Westerly Granite with a 30° sawcut. Sliding was on the clean saw cut faces with no insert.

Confining pressures: 0.20 to 6.30 kb

Axial compression strain rates:  $10^{-4} \text{sec}^{-1}$ ,  $10^{-5} \text{sec}^{-1}$ ,  
 $10^{-6} \text{sec}^{-1}$

Comments:

Small unstable stress drops were observed at confining pressures as low as 0.20 kb. As the confining pressure was increased, the stress drops became larger.

A stabilizing tendency was observed in 4 of the samples deformed at  $10^{-6} \text{sec}^{-1}$  (Fig 89). In those samples run at from 0.39 to 0.98 kb confining pressure, the frequency of stick slip stress drops decreased markedly after the first few millimeters of shearing. This may be due to the creation of a fault gouge zone composed of fragments from the faces of the sawcut.

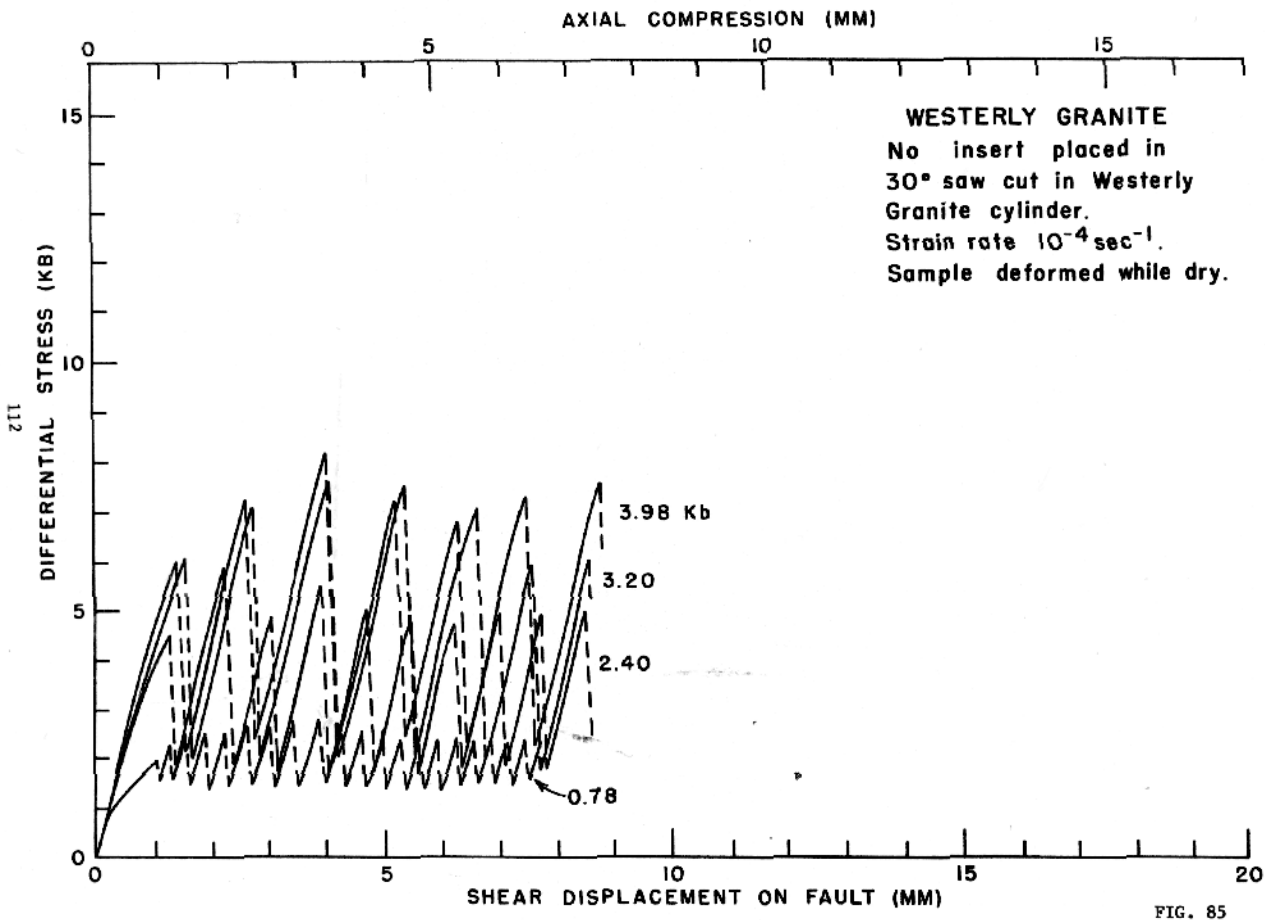


FIG. 85



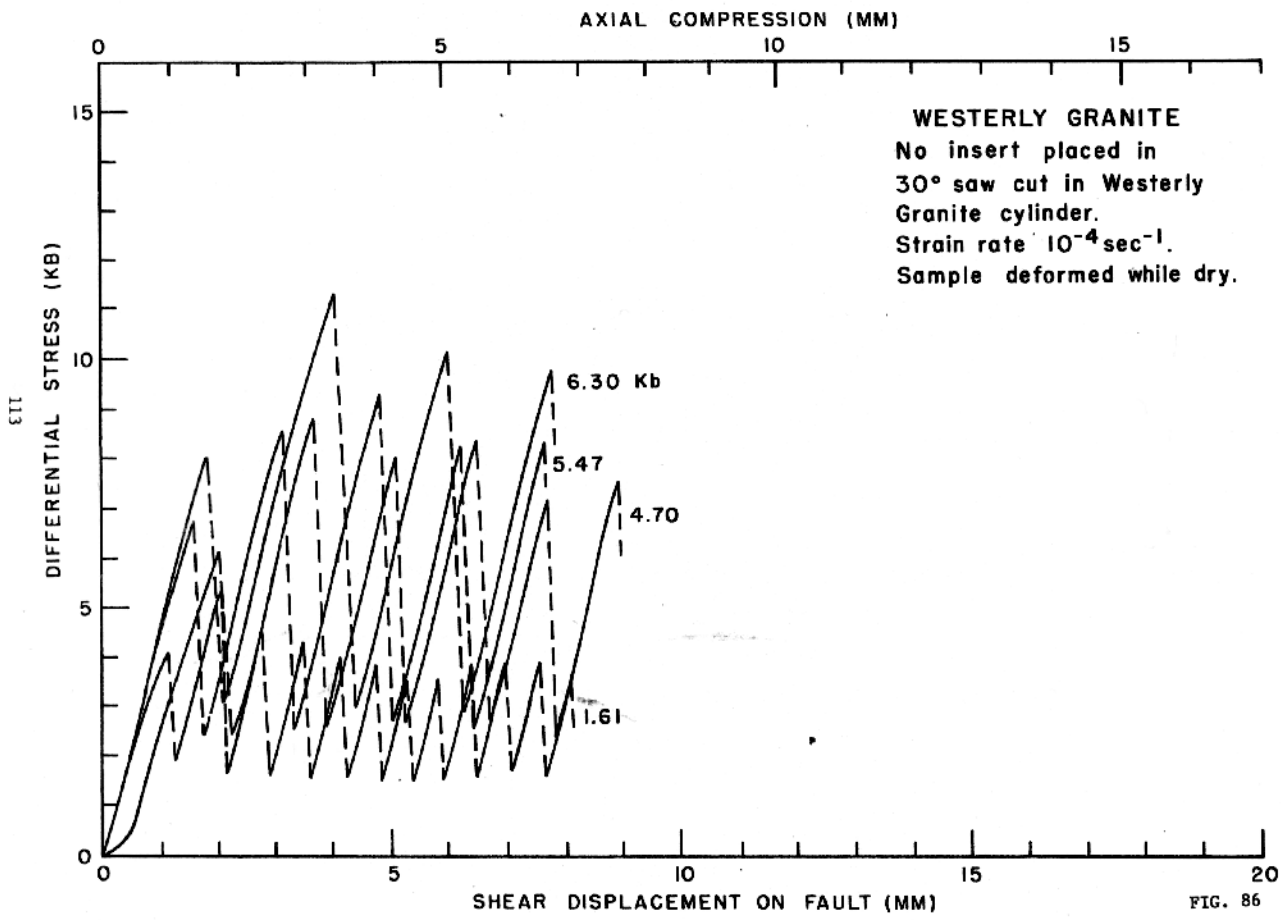


FIG. 86

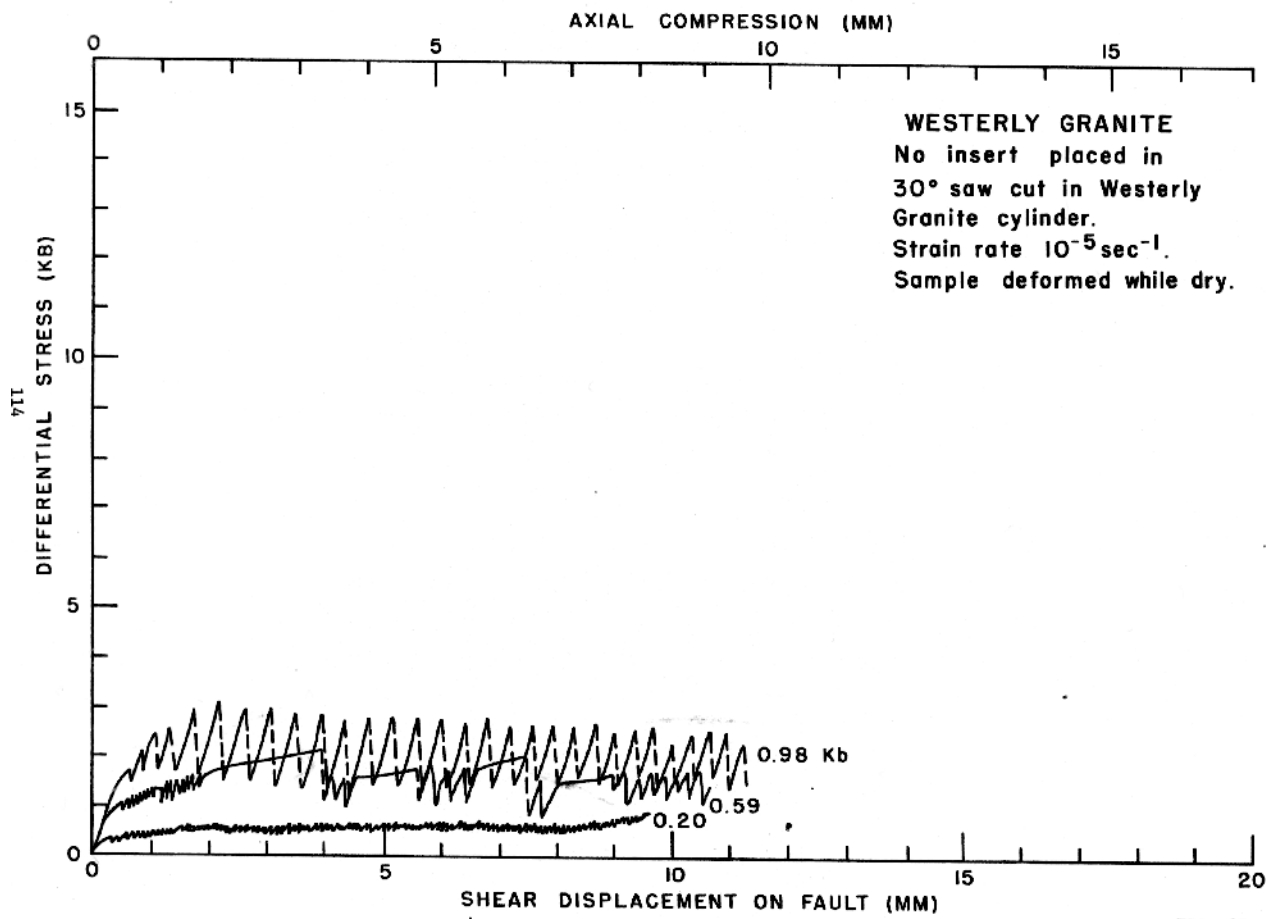
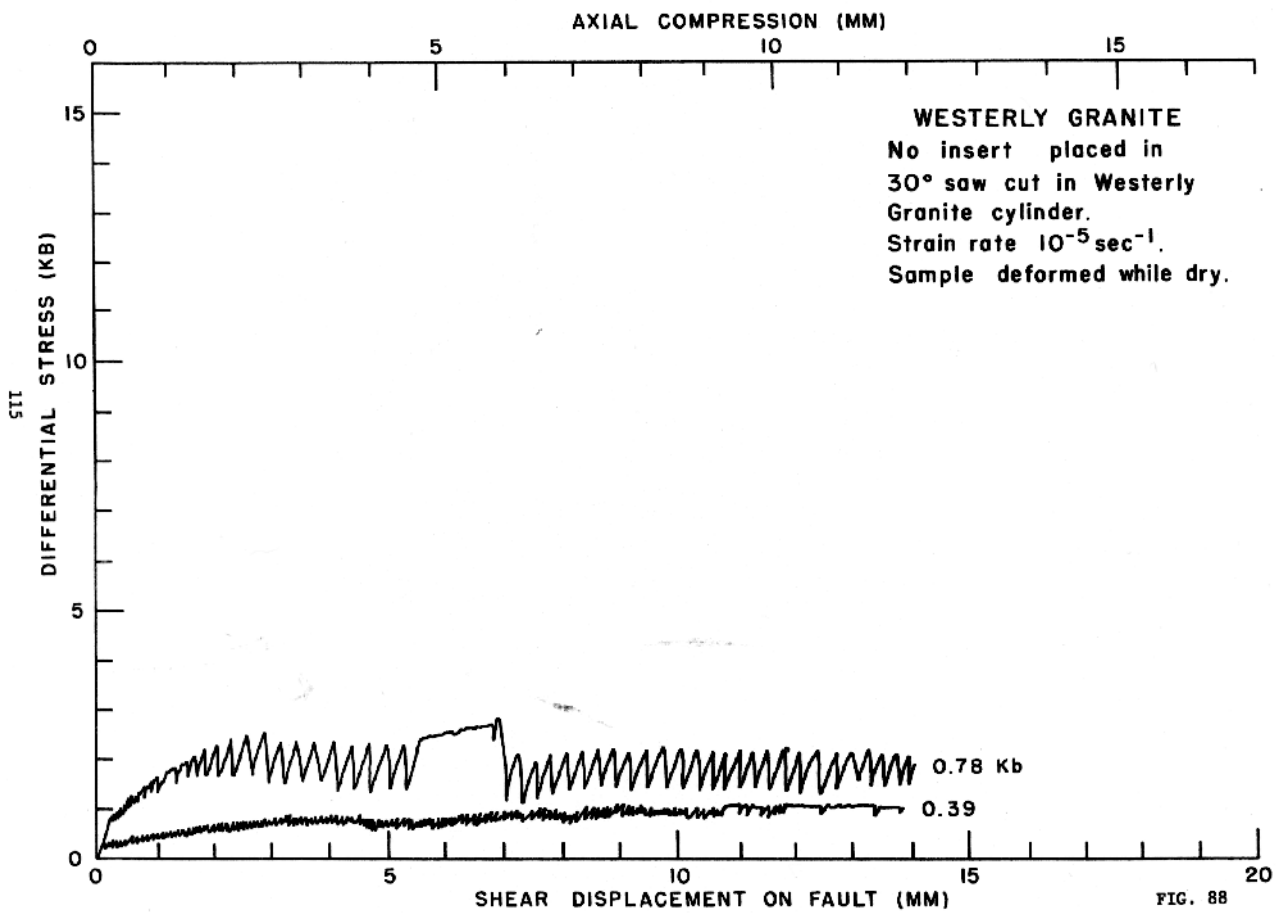


FIG. 87



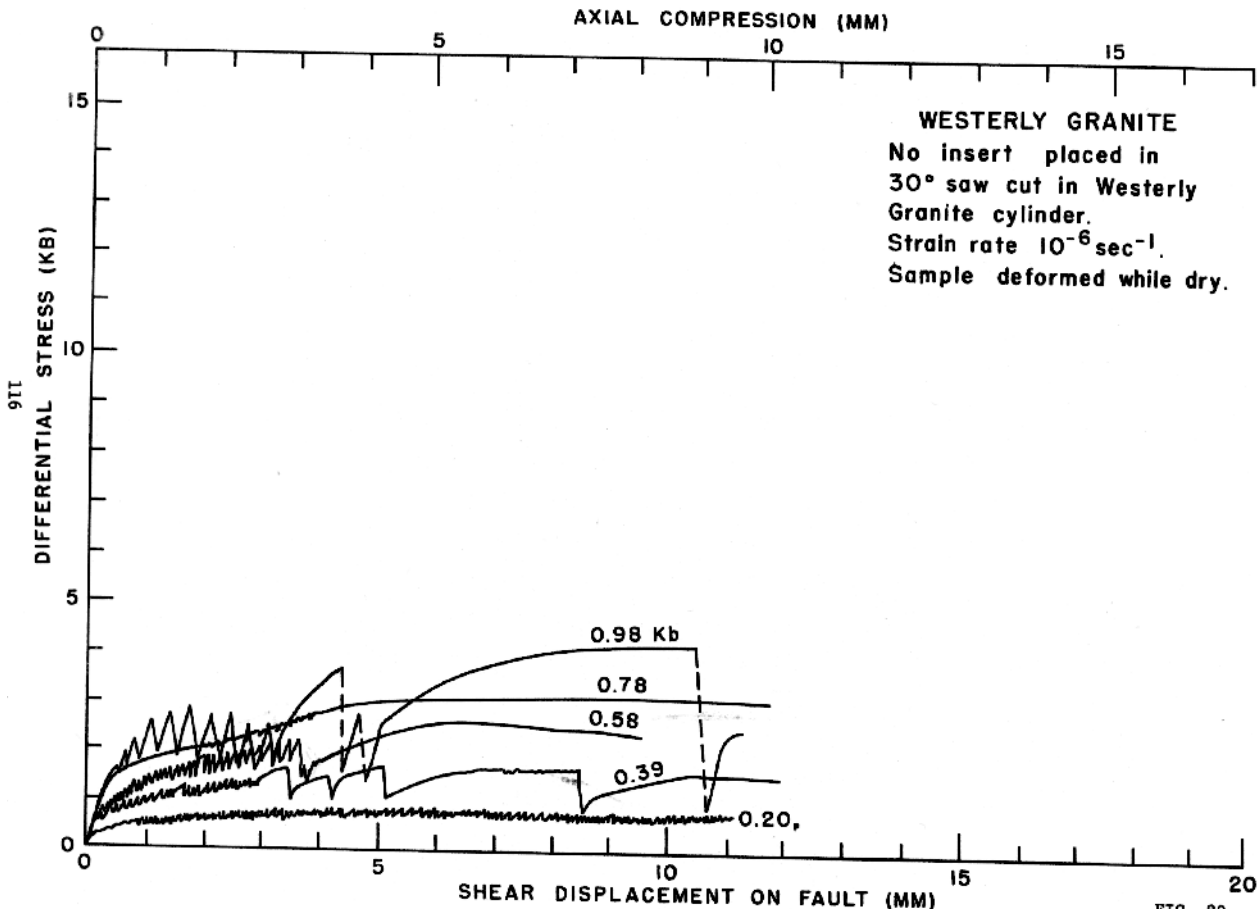


FIG. 89

Westerly Granite, crushed

Fig. 90-101 ) Crushed Westerly Granite, grain sizes  $\leq$  170 mesh,  
20 mesh. Layer thickness of 0.010, 0.025, 0.040,  
0.080, and 0.160 inches.

Confining pressures: 0.74 to 6.27 kb

Axial compression strain rate:  $10^{-4} \text{ sec}^{-1}$

Comments:

The variation in gouge thickness resulted in marked differences in the stability of sliding, with the thicker layers tending to be more stable. The gouge thickness did not greatly affect the maximum stress level at a given confining pressure.

With the 0.010" samples run at 1.54 to 1.57 kb there was an initial period of stable sliding which ended with a series of small stress drops immediately preceeding the large stress drops.

The two different grain size fractions used did not produce any significantly different results in terms of stress levels or stability. Examining the two size fractions after several of the experiments showed that both had been further crushed, with the smaller grains still being recognizably smaller.

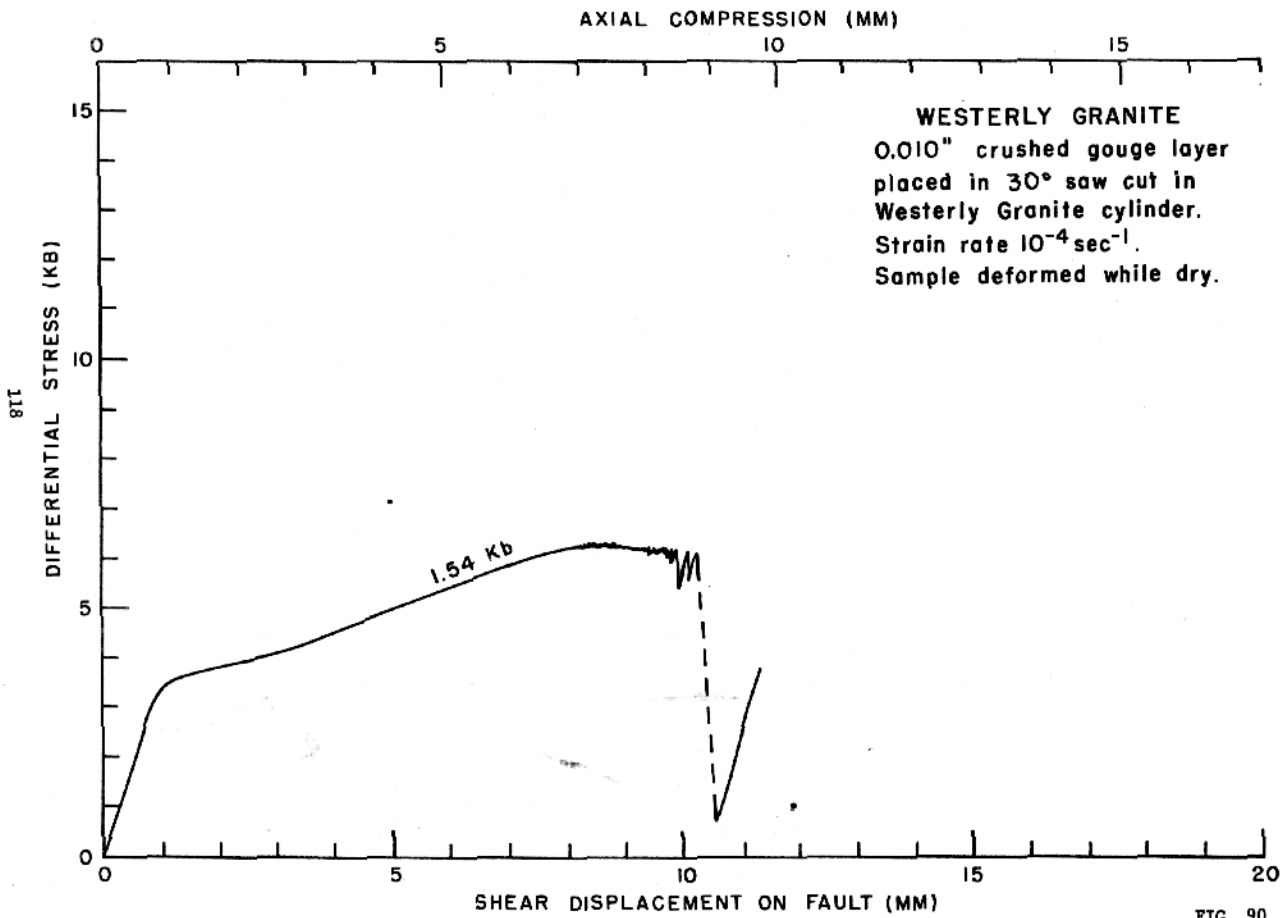


FIG. 90

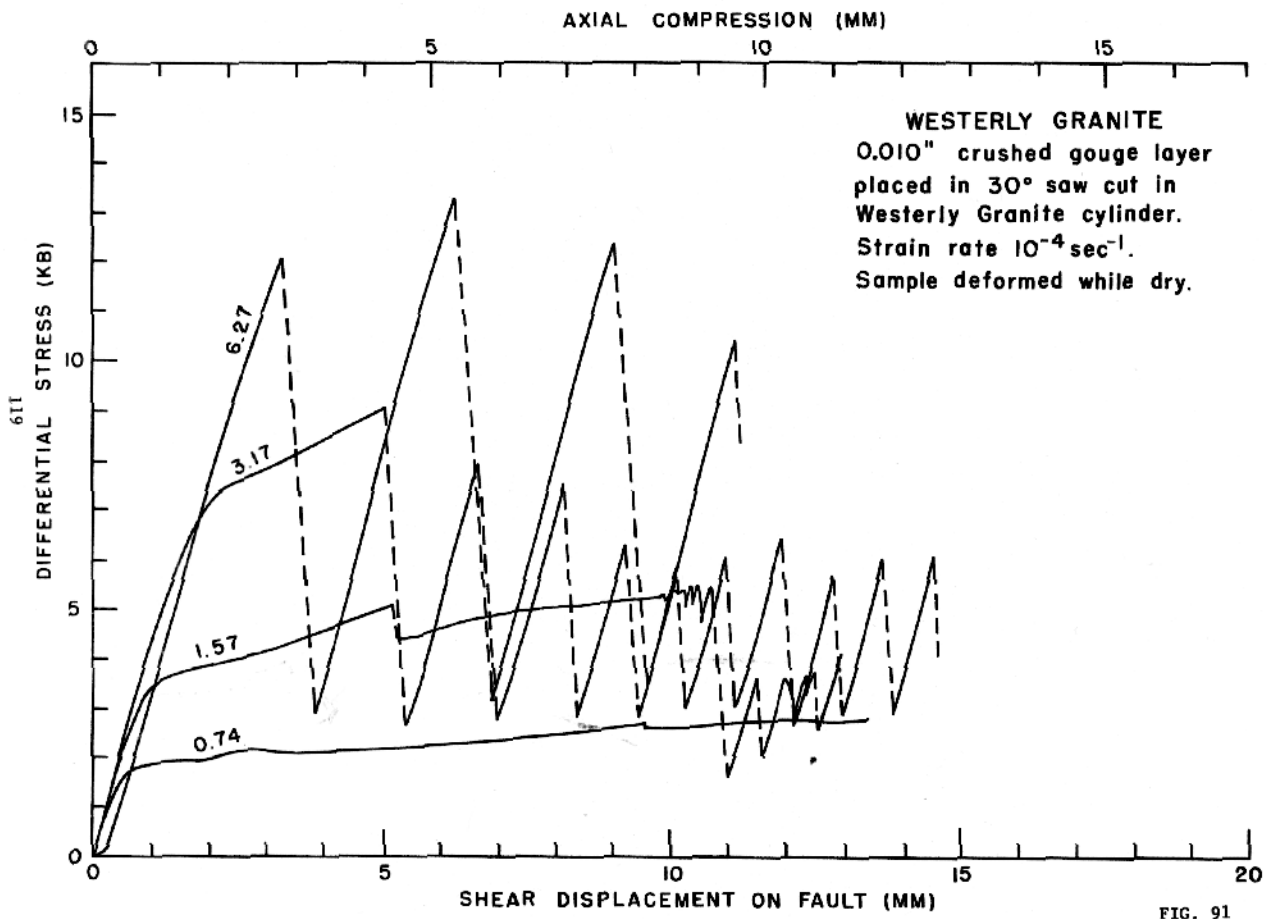
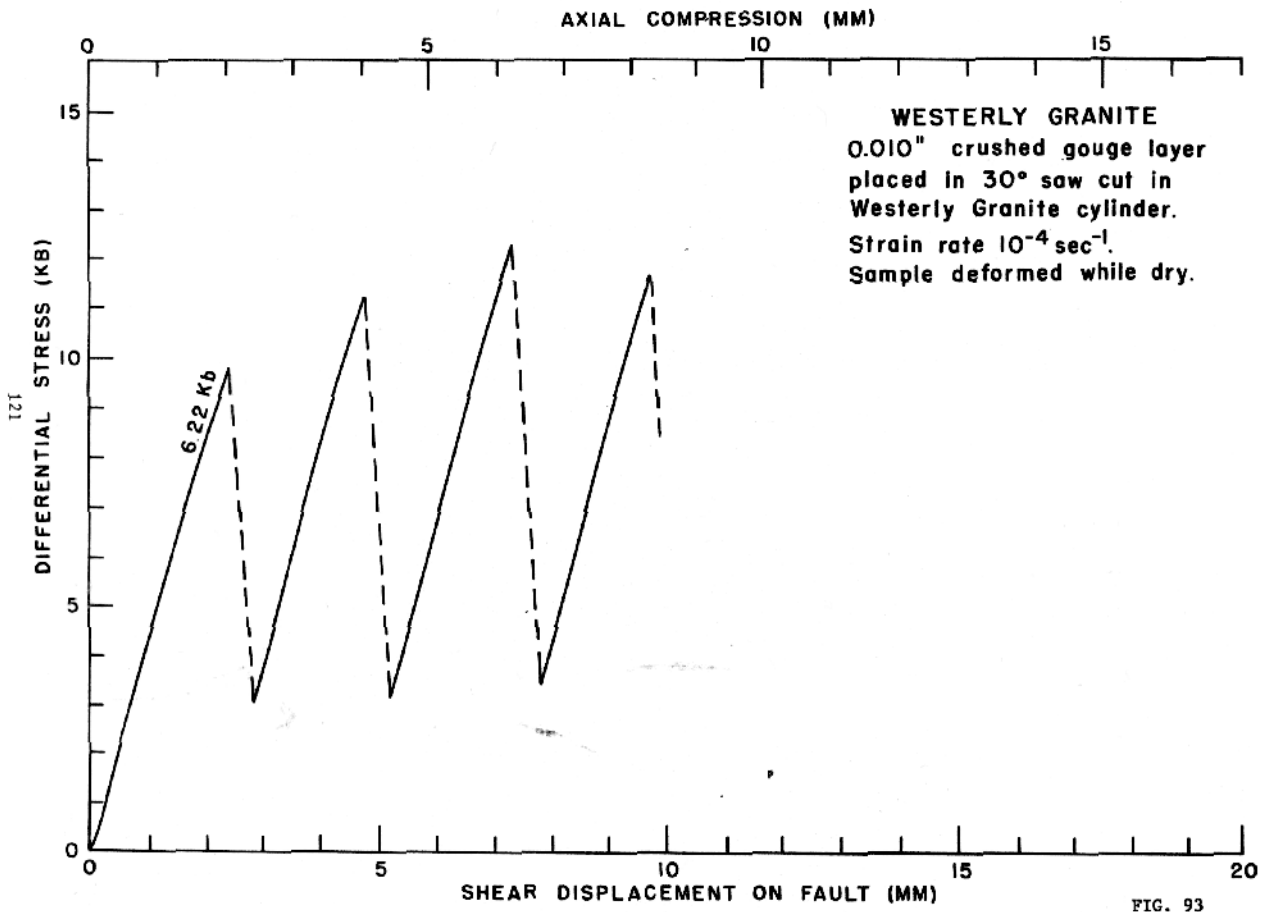


FIG. 91







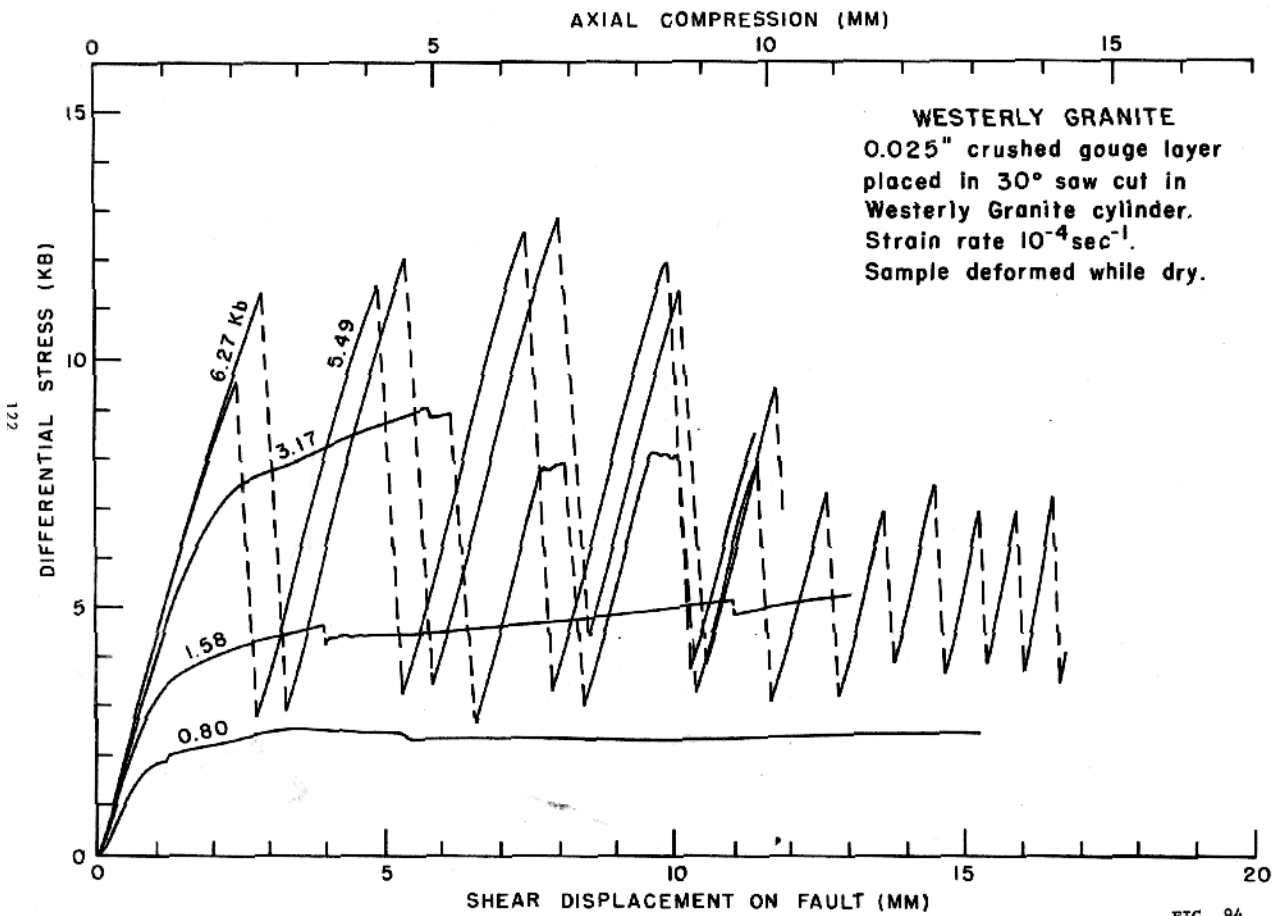
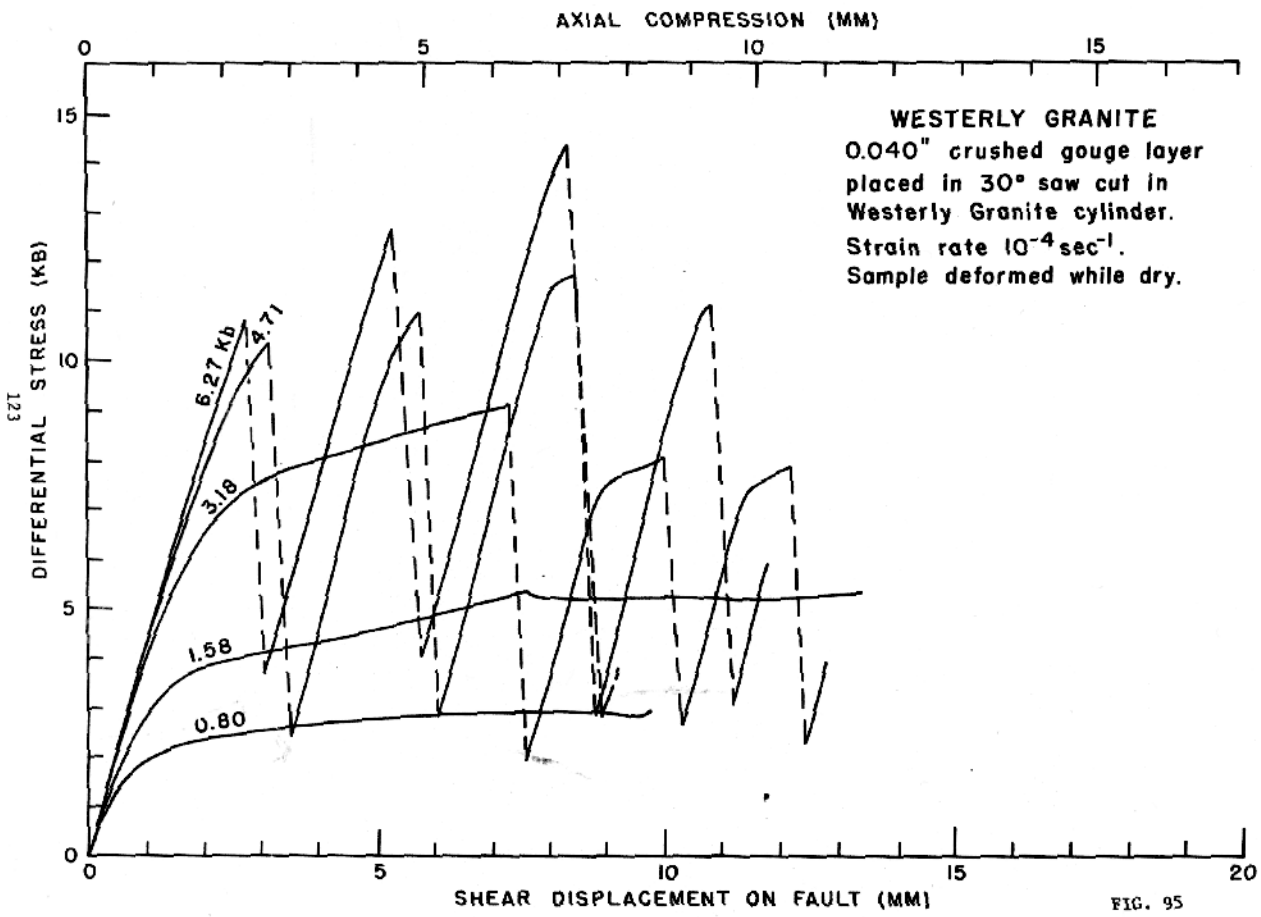


FIG. 94





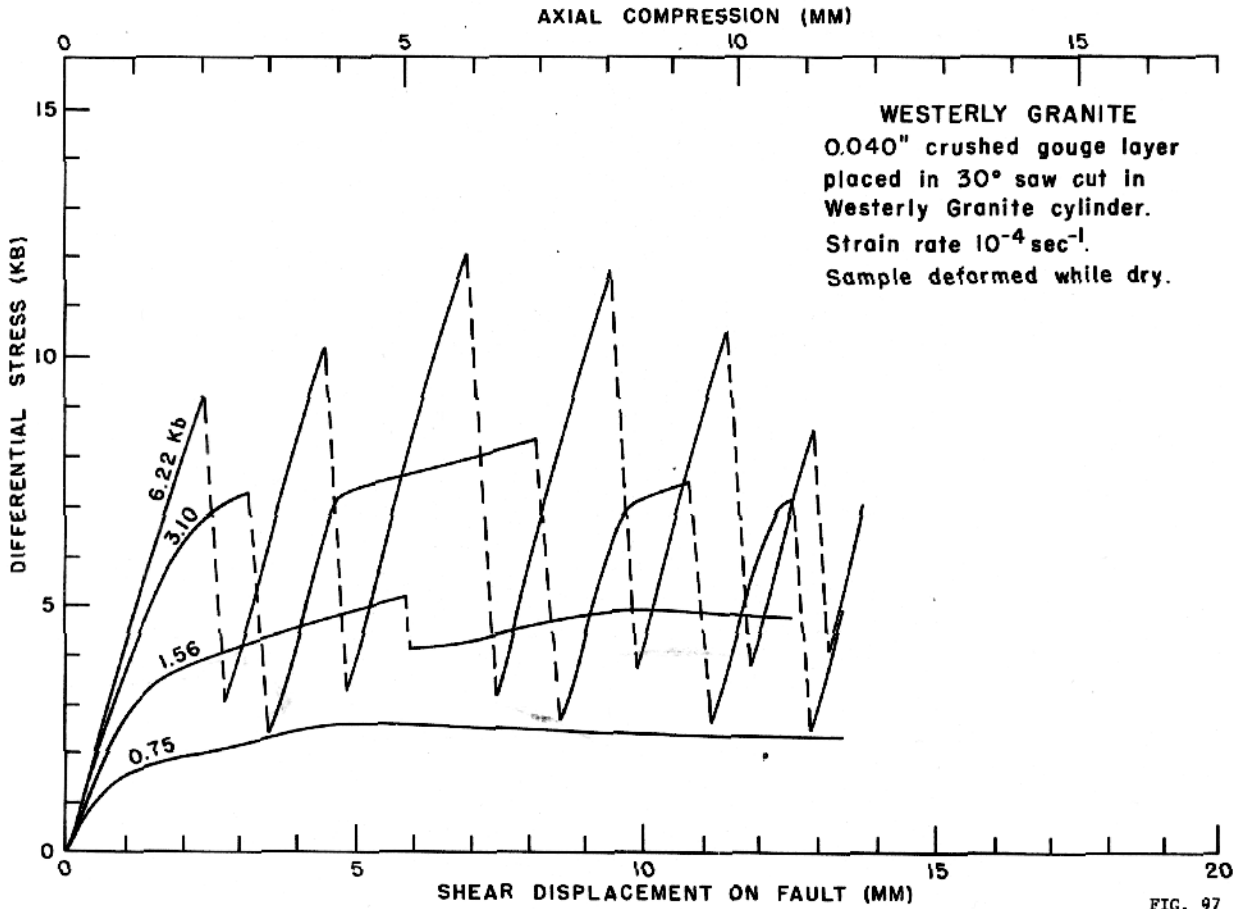


FIG. 97

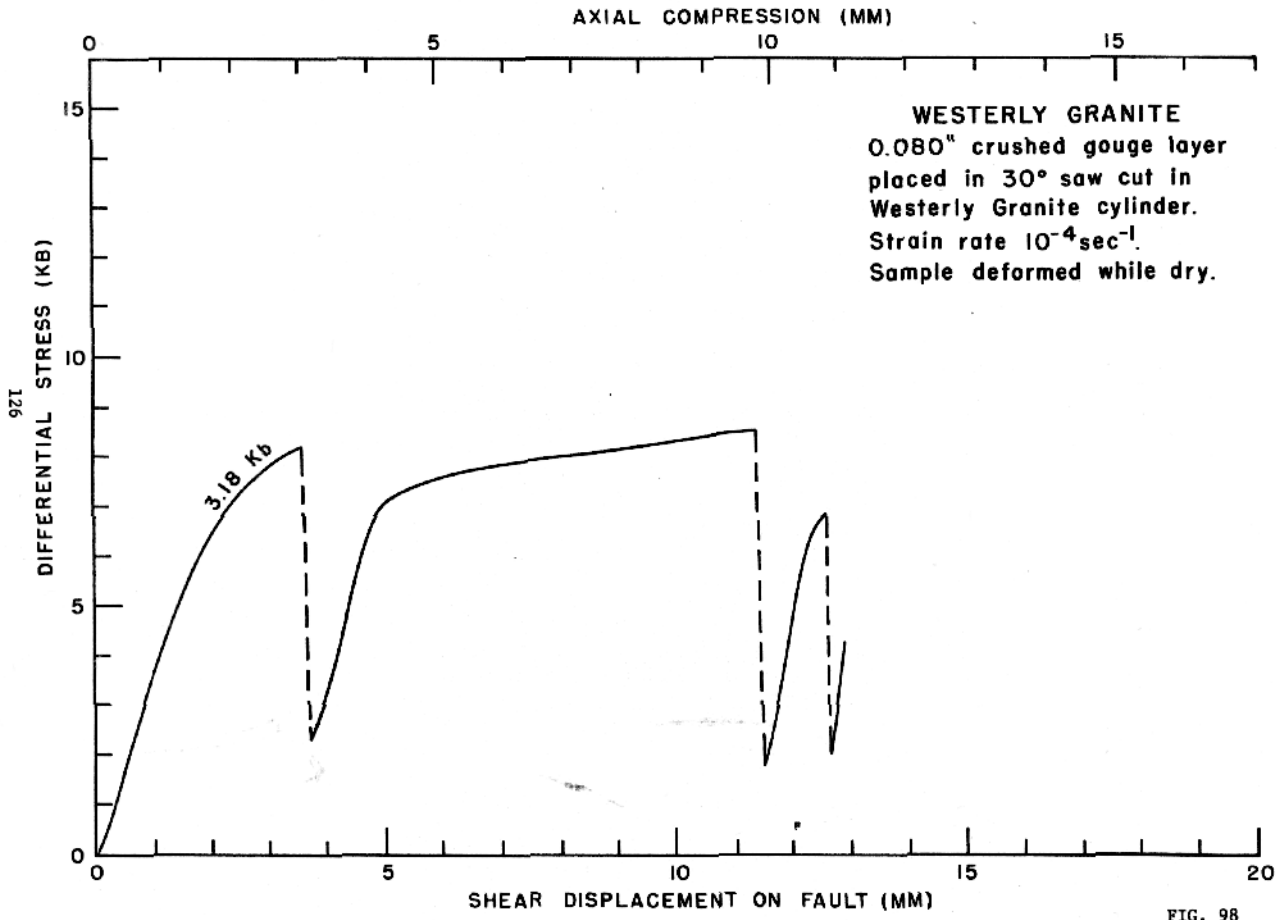
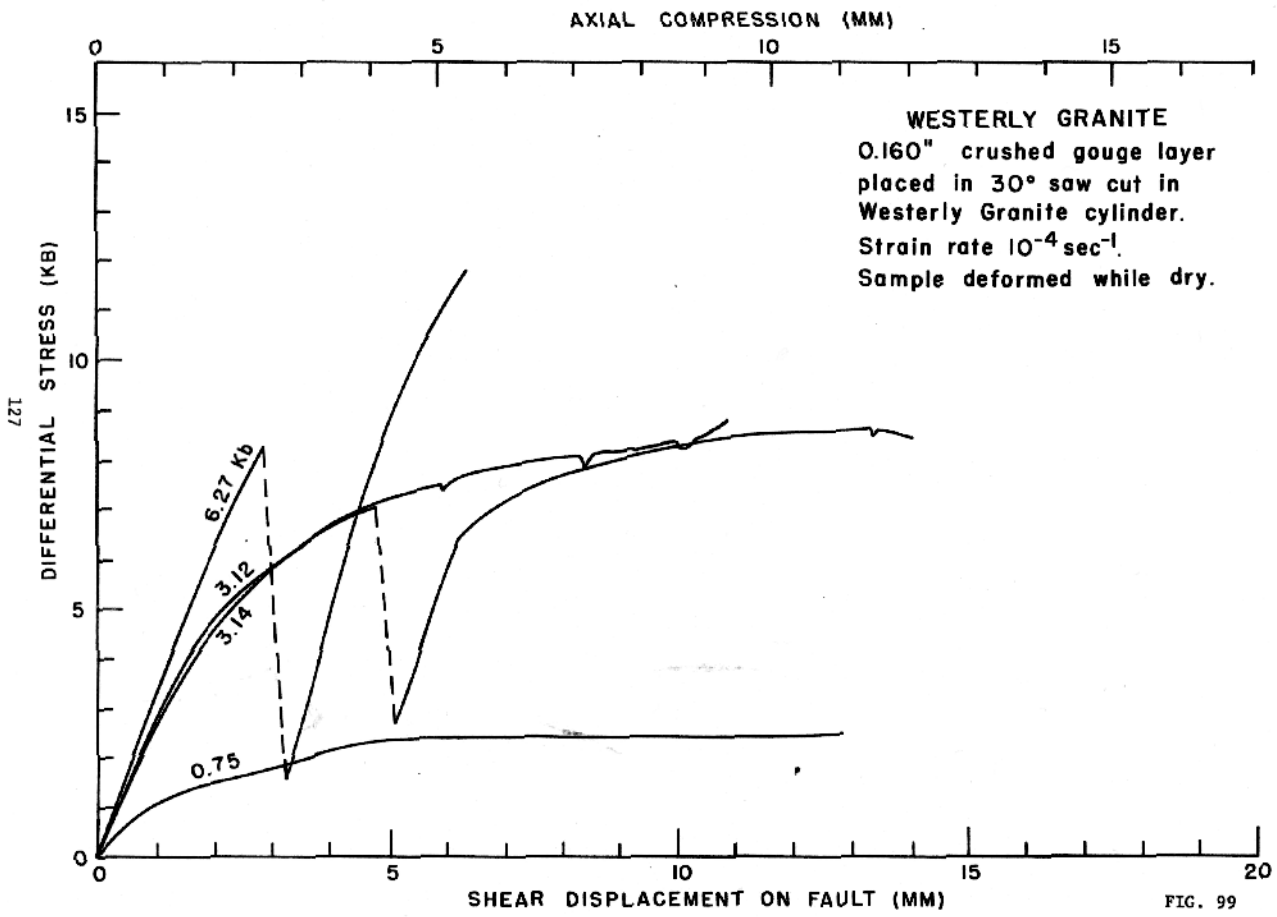


FIG. 98



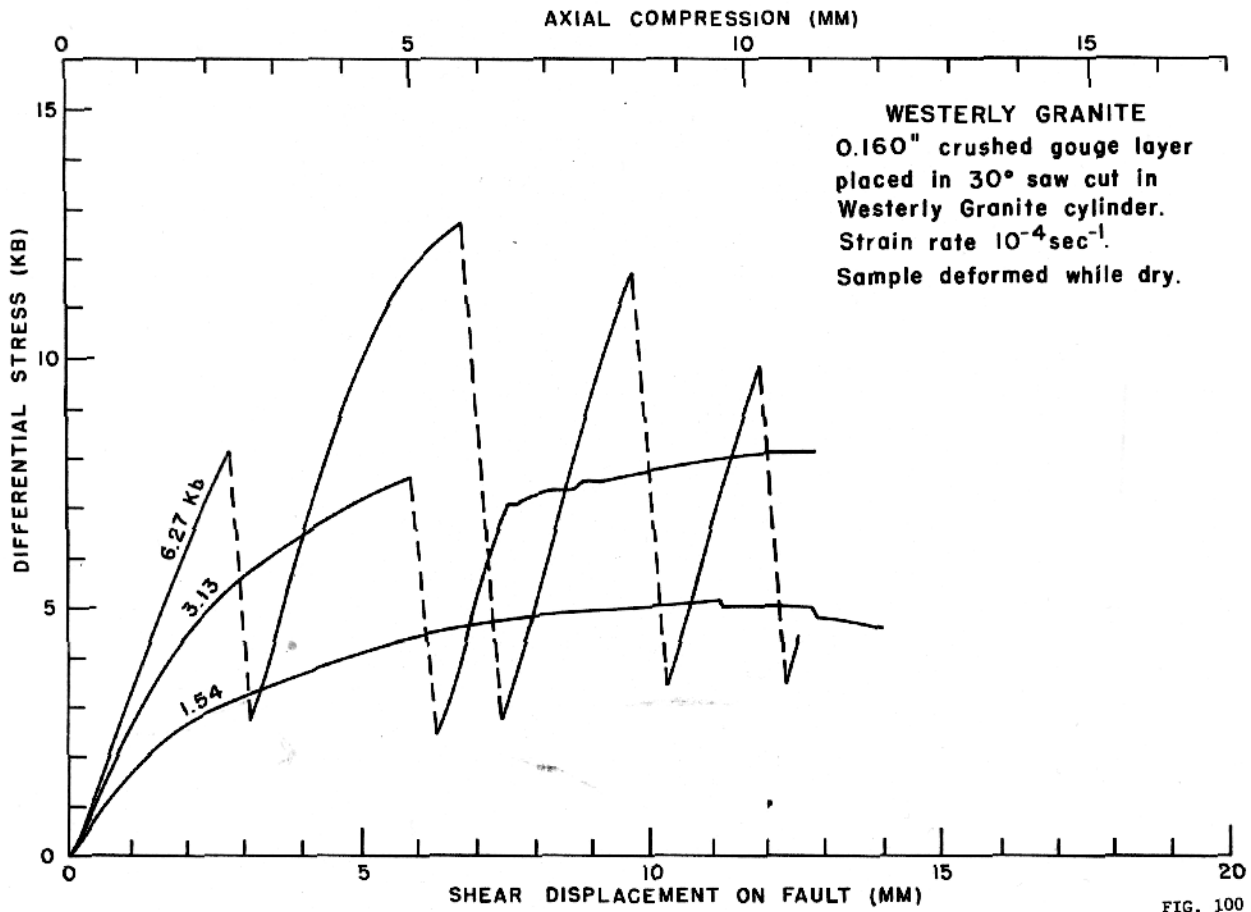


FIG. 100



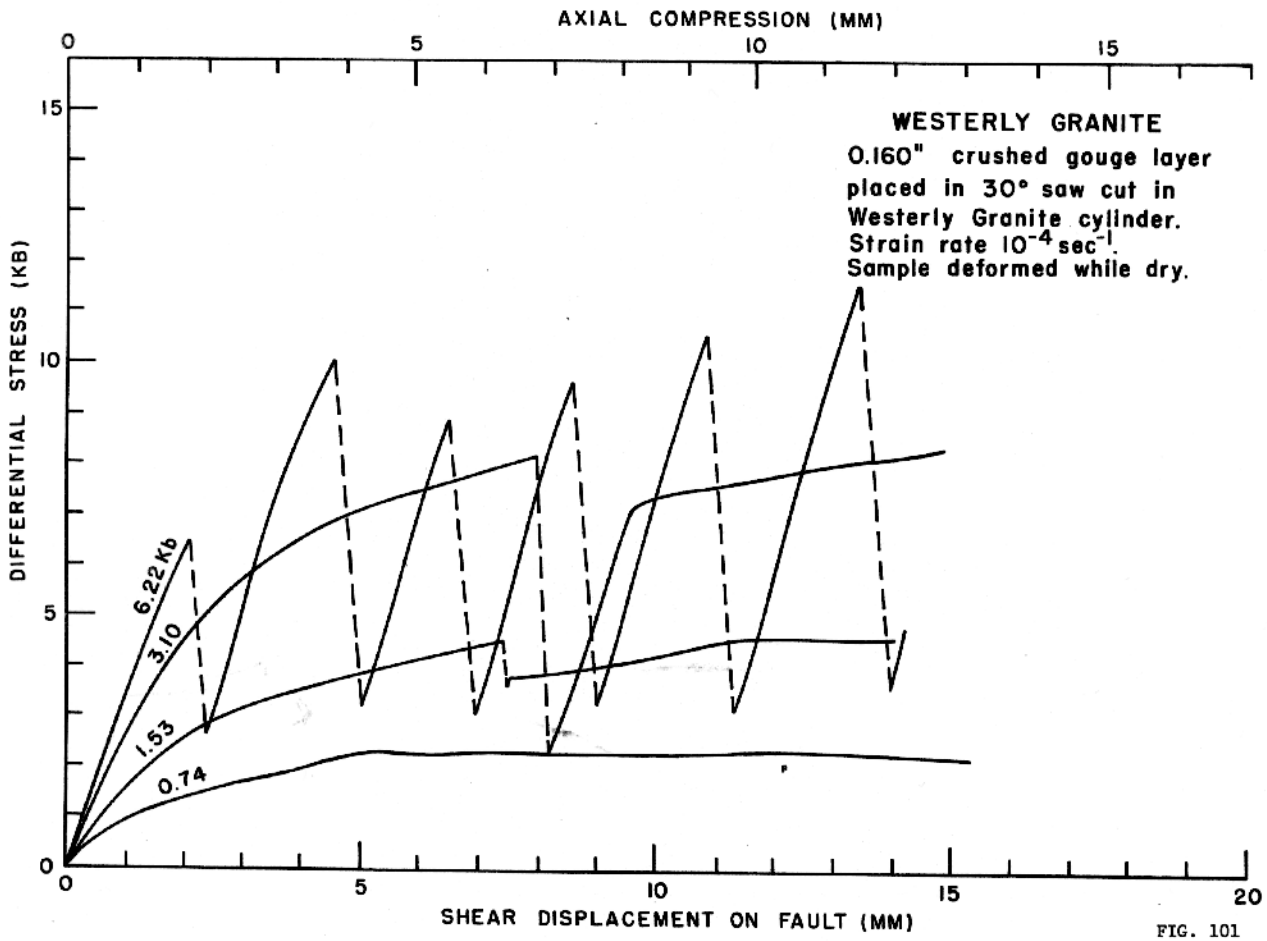


FIG. 101